




广州市欧巴克建材科技有限公司
广州曦信装饰材料有限公司
地址：广州市花都区镜湖大道57号 邮编：510800

GuangZhou Oubake Building Materials Technology Co., Ltd
GuangZhou Season Decoration Materials Co., Ltd.
Add :No.57,JingHu Avenue,HuaDu District,Guangzhou City,China.
Zip code:510800

电话/Tel:+86-020-61773364 邮箱/E-mail: info@gzseason.com
网站/Website: www.gzseason.com



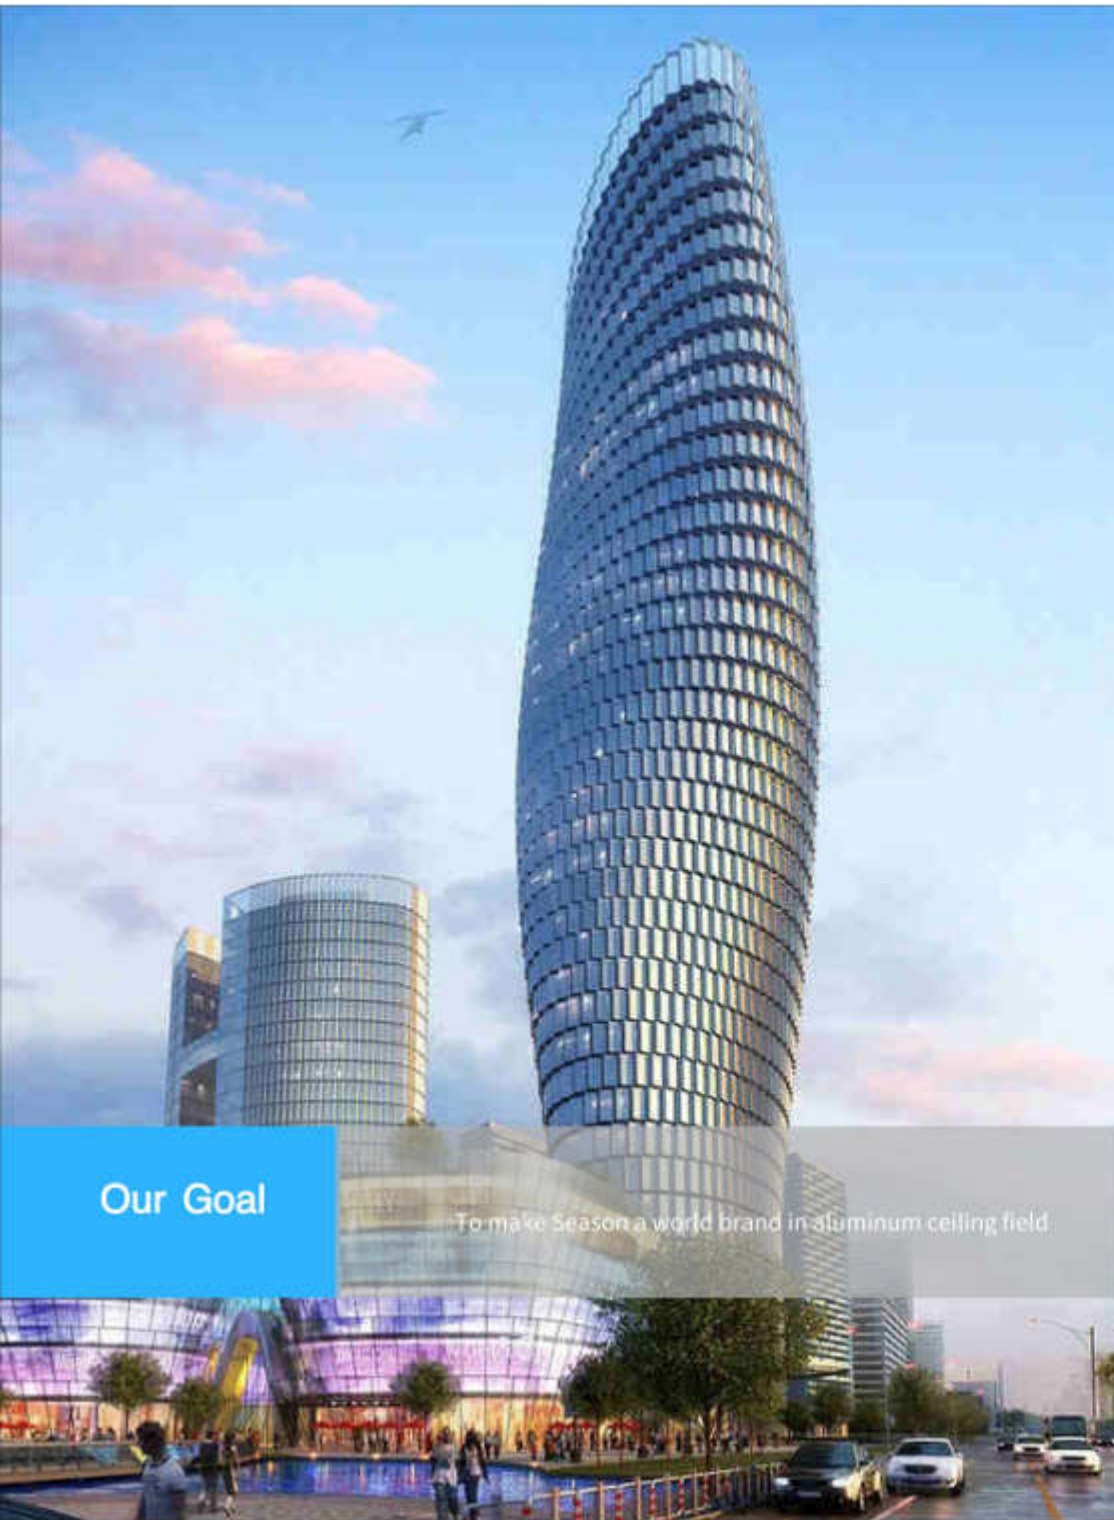

Our Goal

To make Season a world brand in aluminum ceiling field.

SEASON DECORATION



COMPANY

Season Decoration, a leading supplier of quality aluminium ceilings and claddings.

曦信装饰，是优质铝天花板和幕墙的领先供应商。

We are always committed to designing and manufacturing innovative commercial and residential ceiling, wall and suspension system solutions.

我们始终致力于设计和制造创新的商业和住宅天花板，墙壁和悬挂系统解决方案。

The Season range includes Clip-in, Lay-in, Grid, Linear Strip, Baffle, Curtain Wall, Louver, custom designed ceilings, etc., which helps customers to create beautiful, high-performance residential and commercial buildings.

经营范围包括暗架天花，明架天花，格栅天花，条板天花，屏障天花，幕墙，百叶窗，定制天花等等，帮助客户创建美丽以及高性能的住宅和商业建筑。

Certificates

认证证书

ISO14001



ISO9001




Test Report

检测报告

Reaction to Fire 燃烧性能



Acoustic absorption 吸音性能

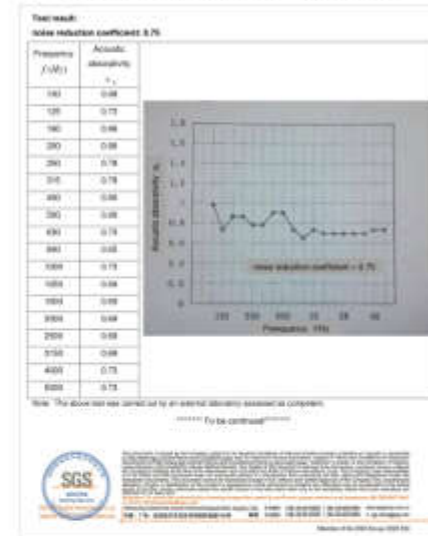

BS476-7 Method of test to determine the classification of the surface spread of flame of products

BS476-7 产品火焰表面延伸等级确定的测试方法



BS476-6 Method of test for fire propagation for products

BS476-6 产品的火焰传播测试方法





Clip-in/Snap-in Ceiling

扣板天花吊顶（暗架天花吊顶）

Key Features:

- Material: aluminum alloy & galvanized steel.
- Panel size: 300x300, 400x400, 500x500, 600x600, 300x1200, 600x1200mm, etc. (Customized size is available.)
- Height: 18/20/25/30mm.
- Thickness: 0.4~1.2mm
- Bevelled edge and square edge design.

Surface finish:

- Powder coating
- PE coating
- PVDF coating
- Pre-painted
- Transfer printing

Color Range:

- The standard color is white, black, grey, etc.
- Wood color and marble color is available.
- Any of the RAL color is available as required.
- Customized colors available.

Application:

Office building, School, Library, etc.

特征:

- 材料: 铝、镀锌钢
- 尺寸: 300x300, 400x400, 500x500, 600x600, 300x1200, 600x1200mm, 等 (可定制尺寸)
- 高度: 18/20/25/30mm
- 厚度: 0.4~1.2mm
- 斜角或直角设计

表面处理:

- 粉末喷涂
- 聚酯油漆喷涂
- 氟碳喷涂
- 滚涂 (辊涂)
- 热转印

颜色范围:

- 标准颜色为白色、黑色、灰色
- 可做木纹或大理石纹颜色
- 可按要求做任何RAL颜色 (潘通色卡)
- 可定制颜色


应用场合:

写字楼, 学校, 图书馆, 等等。




Installation:

安装图:

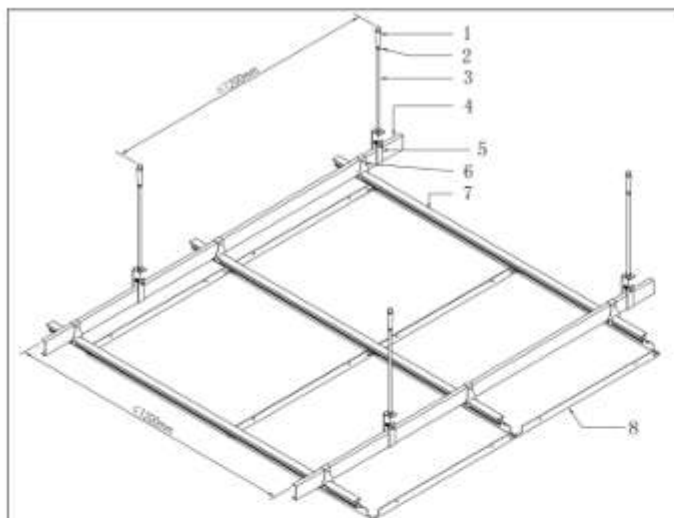

1. Anchor bolt
2. Nuts
3. Thread rod
4. 38# main channel
5. Hanger for 38# main channel
6. Hanger for spring tee
7. Spring tee
8. Clip-in ceiling

1. 拉爆螺丝
2. 螺母
3. 螺杆
4. 38#轻钢龙骨
5. 38#轻钢龙骨吊件
6. 三角龙骨吊件
7. 三角龙骨
8. 扣板天花




Clip-in Ceiling with Spring tee System

使用三角龙骨系统的扣板天花吊顶


Section Details:

节点图

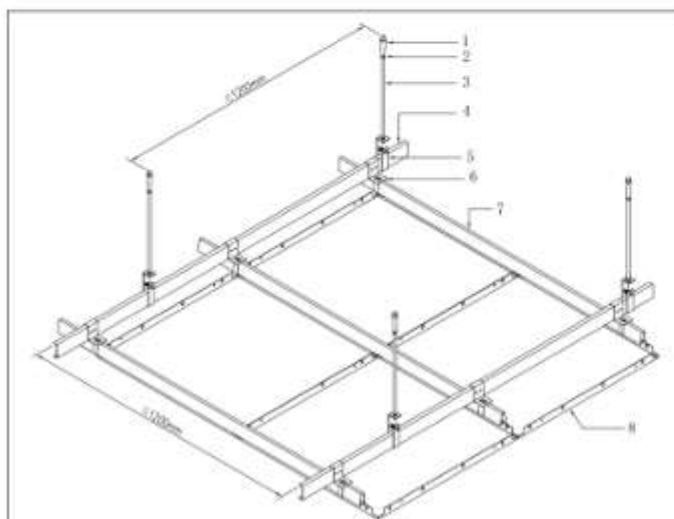

1. Anchor bolt
2. Nuts
3. Thread rod
4. 38# main channel
5. Hanger for 38# main channel
6. Hanger for A-shaped carrier
7. A-shaped carrier
8. Snap-in ceiling

1. 拉爆螺丝
2. 螺母
3. 螺杆
4. 38#轻钢龙骨
5. 38#轻钢龙骨吊件
6. A型龙骨吊件
7. A型龙骨
8. 扣板天花



Snap-in Ceiling with A-shaped carrier System

使用A型龙骨系统的扣板天花吊顶

Section Details:

节点图

Swing-down Clip-in Ceiling

悬吊式扣板天花吊顶 (暗架天花吊顶)



Key Features:

- Material: aluminum alloy & galvanized steel.
- Panel size: 600x600mm, Height: 25mm, Thickness: 0.4~1.1mm
- Bevelled edge design.

Surface finish:

- Powder coating
- PE coating
- PVDF coating
- Pre-painted
- Transfer printing

Color Range:

- The standard color is white, black, grey, etc.
- Wood color and marble color is available.
- Any of the RAL color is available as required.
- Customized colors available.

Application:

Office building, School, Library, etc.

特征:

- 材料: 铝、镀锌钢
- 尺寸: 600x600mm
- 高度: 25mm
- 厚度: 0.4~1.1mm
- 斜角设计

表面处理:

- 粉末喷涂
- 聚酯油漆喷涂
- 氟碳喷涂
- 滚涂 (辊涂)
- 热转印

颜色范围:

- 标准颜色为白色, 黑色, 灰色
- 可做木纹或大理石纹颜色
- 可按要求做任何RAL颜色 (潘通色卡)
- 可定制颜色


应用场合:

写字楼, 学校, 图书馆, 等等。




Installation:

安装图:

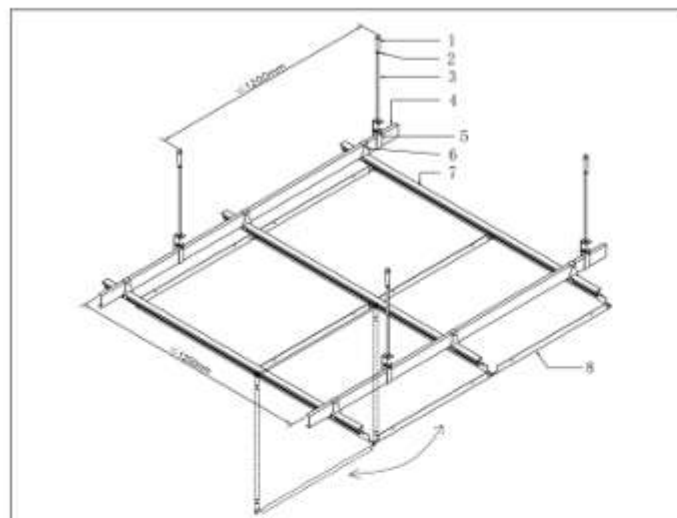

1. Anchor bolt
2. Nuts
3. Thread rod
4. 38# main channel
5. Hanger for 38# main channel
6. Hanger for spring tee
7. Spring tee
8. Swing-down Clip-in ceiling

1. 拉爆螺丝
2. 螺母
3. 螺杆
4. 38#轻钢龙骨
5. 38#轻钢龙骨吊件
6. 三角龙骨吊件
7. 三角龙骨
8. 悬吊式扣板天花



Swing-down Clip-in Ceiling with Spring tee System

使用三角龙骨系统的悬吊式扣板天花吊顶

Section Details:

节点图



Lay-in/Lay-on Ceiling

跌级板天花吊顶 (明架天花吊顶)



Key Features:

- Material: aluminum alloy & galvanized steel.
- Module size: 300x300, 600x600, 600x1200mm (Customized size is available.)
- Upper size: 595x595, 603x603, 587x1187mm
- Lower size: 575x575, 584x584, 575x1175mm
- Height: 8/10/12/13mm
- Thickness: 0.4-0.8mm
- Bevelled edge and square edge design.

Surface finish:

- Powder coating
- PE coating
- PVDF coating
- Pre-painted
- Transfer printing

Color Range:

- The standard color is white, black, grey, etc.
- Wood color and marble color is available.
- Any of the RAL color is available as required.
- Customized colors available.

Application:

Office building, School, Library, etc.

特征:

- 材料: 铝、镀锌钢
- 模块尺寸: 300x300, 600x600, 600x1200mm (可定制尺寸)
- 上层尺寸: 595x595, 603x603, 587x1187mm
- 下层尺寸: 575x575, 584x584, 575x1175mm
- 高度: 8/10/12/13mm
- 厚度: 0.4-0.8mm
- 斜角或直角设计

表面处理:



- 粉末喷涂
- 聚酯油漆喷涂
- 氟碳喷涂
- 滚涂 (银涂)
- 热转印

颜色范围:

- 标准颜色为白色, 黑色, 灰色
- 可做木纹或大理石纹颜色
- 可按要求做任何RAL颜色 (潘通色卡)
- 可定制颜色


应用场合:

写字楼, 学校, 图书馆, 等等。

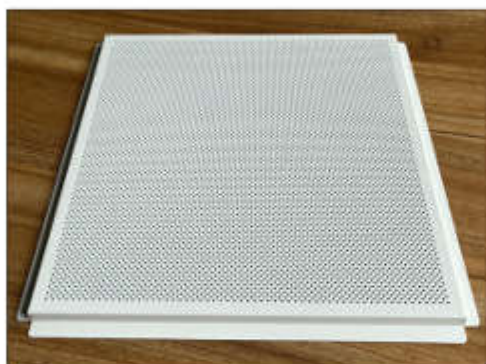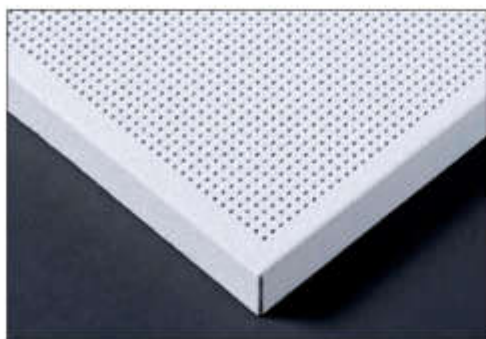

Installation:

安装图:

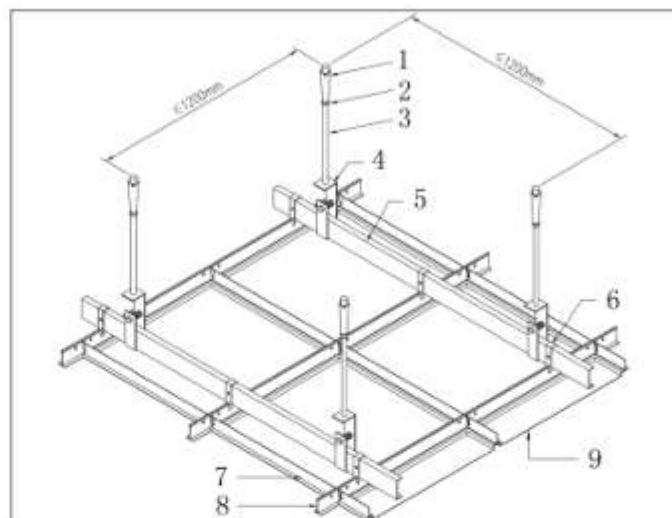

Lay-in Ceiling with T-bar System

使用T型龙骨系统的Lay-in跌级板天花吊顶


1. Anchor bolt
2. Nuts
3. Thread rod
4. Hanger for 38# main channel
5. 38# main channel
6. Hanger for main T-bar
7. Cross T-bar
8. Main T-bar
9. Lay-in ceiling

1. 拉爆螺丝
2. 螺母
3. 螺杆
4. 38#轻钢龙骨吊件
5. 38#轻钢龙骨
6. T型龙骨吊件
7. T型副龙骨
8. T型主龙骨
9. Lay-in跌级板天花



Section Details:

节点图

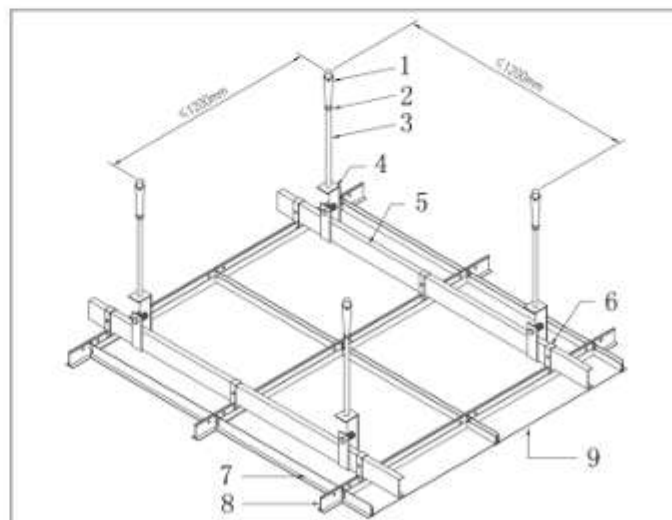

Lay-on Ceiling with T-bar System

使用T型龙骨系统的Lay-on跌级板天花吊顶

1. Anchor bolt
2. Nuts
3. Thread rod
4. Hanger for 38# main channel
5. 38# main channel
6. Hanger for main T-bar
7. Cross T-bar
8. Main T-bar
9. Lay-on ceiling

1. 拉爆螺丝
2. 螺母
3. 螺杆
4. 38#轻钢龙骨吊件
5. 38#轻钢龙骨
6. T型龙骨吊件
7. T型副龙骨
8. T型主龙骨
9. Lay-on跌级板天花



Section Details:

节点图



C-strip Ceiling

C型条扣天花吊顶



Key Features:

- Material: aluminum alloy.
- Panel Width: 50/75/100/150/200/300mm, etc.
(Customized size is available.)
- Height: 16mm.
- Length: 3000mm/pc as standard, up to 6000mm.
- Thickness: 0.4~0.9mm
- Bevelled edge and square edge design.

Surface finish:

- Powder coating
- PE coating
- PVDF coating
- Pre-painted
- Transfer printing

Color Range:

- The standard color is white, black, grey, etc.
- Wood color and marble color is available.
- Any of the RAL color is available as required.
- Customized colors available.

Application:

Restaurant, Hospital, Shopping mall, etc.

特征:

- 材料: 铝
- 板宽: 50/75/100/150/200/300mm, 等 (可定制尺寸)
- 板高: 16mm
- 长度: 标准长度3000mm/支, 可做到6000mm
- 厚度: 0.4~0.9mm
- 斜角或直角设计

表面处理:




- 粉末喷涂
- 聚酯油漆喷涂
- 氟碳喷涂
- 滚涂 (辊涂)
- 热转印

颜色范围:

- 标准颜色为白色, 黑色, 灰色
- 可做木纹或大理石纹颜色
- 可按要求做任何RAL颜色 (潘通色卡)
- 可定制颜色


应用场合:

饭店, 医院, 商场, 等等。

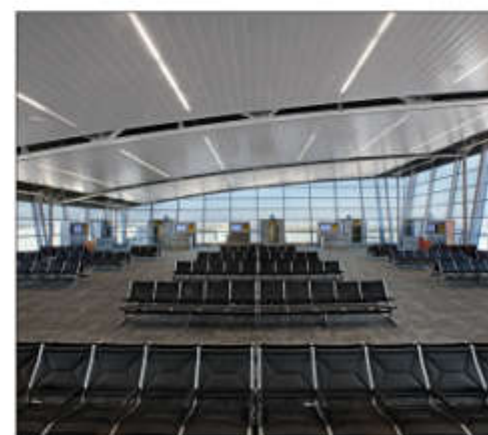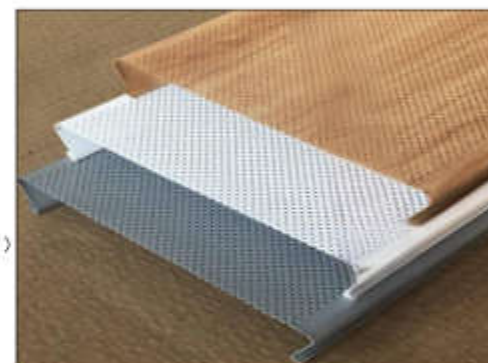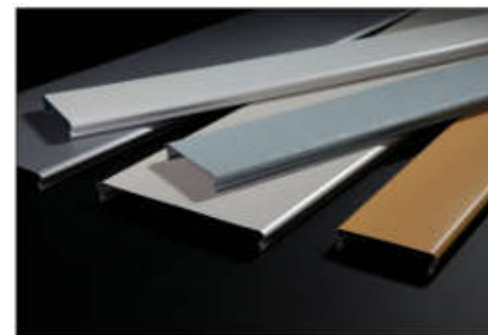

Installation:

安装图:

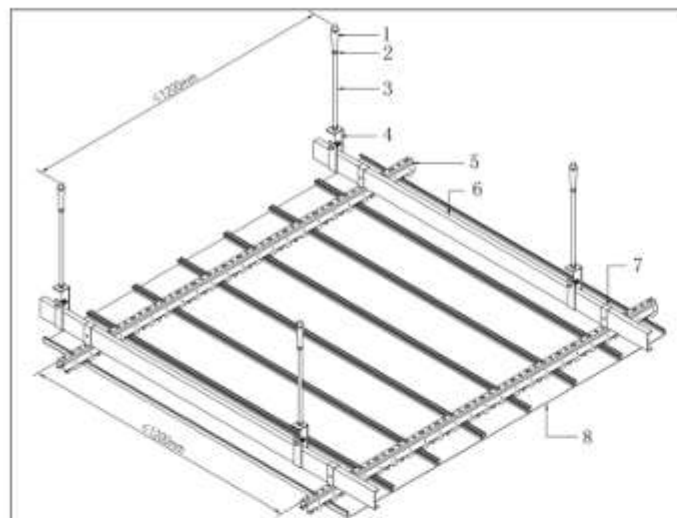

1. Anchor bolt
2. Nuts
3. Thread rod
4. Hanger for 38# main channel
5. C-strip carrier
6. 38# main channel
7. C-hanger
8. Bevelled edge C-strip ceiling

1. 拉爆螺丝
2. 螺母
3. 螺杆
4. 38#轻钢龙骨吊件
5. C型条扣龙骨
6. 38#轻钢龙骨
7. C型吊件
8. 斜角C型条扣天花




Bevelled edge C-strip Ceiling System

斜角C型条扣天花吊顶系统

Section Details:

节点图

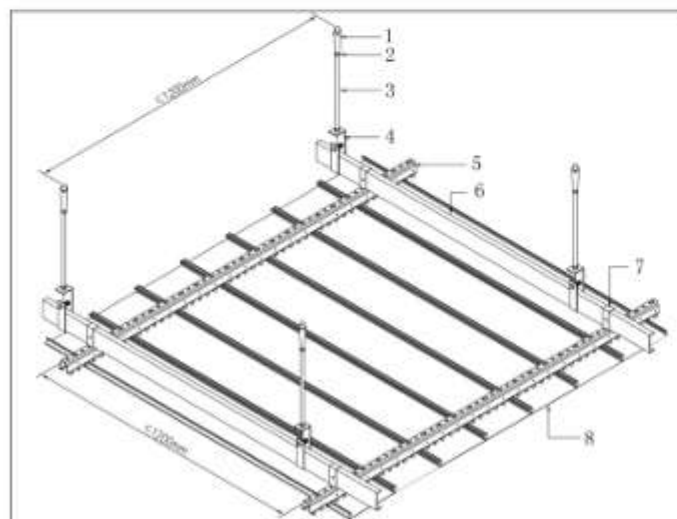

1. Anchor bolt
2. Nuts
3. Thread rod
4. Hanger for 38# main channel
5. C-strip carrier
6. 38# main channel
7. C-hanger
8. Square edge C-strip ceiling

1. 拉爆螺丝
2. 螺母
3. 螺杆
4. 38#轻钢龙骨吊件
5. C型条扣龙骨
6. 38#轻钢龙骨
7. C型吊件
8. 直角C型条扣天花



Square edge C-strip Ceiling System

直角C型条扣天花吊顶系统

Section Details:

节点图



S-strip Ceiling

S型条扣天花吊顶



Key Features:

- Material: aluminum alloy.
- Panel Width: 300mm as standard.
(Customized size is available.)
- Height: 29mm.
- Length: 3000mm/pc as standard, up to 6000mm.
- Thickness: 0.7~0.9mm
- Bevelled edge and square edge design.

Surface finish:

- Powder coating
- PE coating
- PVDF coating
- Pre-painted
- Transfer printing

Color Range:

- The standard color is white, black, grey, etc.
- Wood color and marble color is available.
- Any of the RAL color is available as required.
- Customized colors available.

Application:

Gas station, Airport terminal, High-Railway station, etc.

特征:

- 材料: 铝
- 板宽: 标准宽度300mm (可定制尺寸)
- 板高: 29mm
- 长度: 标准长度3000mm/支, 可做到6000mm
- 厚度: 0.7~0.9mm
- 斜角或直角设计

表面处理:


- 粉末喷涂
- 聚酯油漆喷涂
- 氟碳喷涂
- 滚涂 (辊涂)
- 热转印

颜色范围:

- 标准颜色为白色, 黑色, 灰色
- 可做木纹或大理石纹颜色
- 可按要求做任何RAL颜色 (潘通色卡)
- 可定制颜色


应用场合:

加油站, 机场航站楼, 高铁站, 等等。

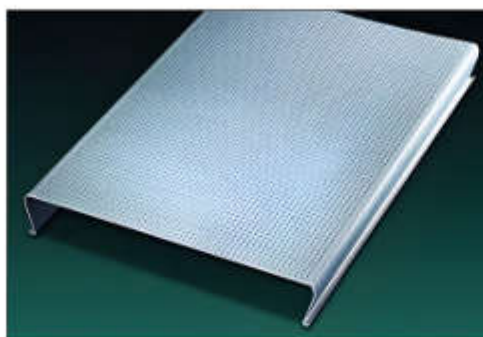

Installation:

安装图:

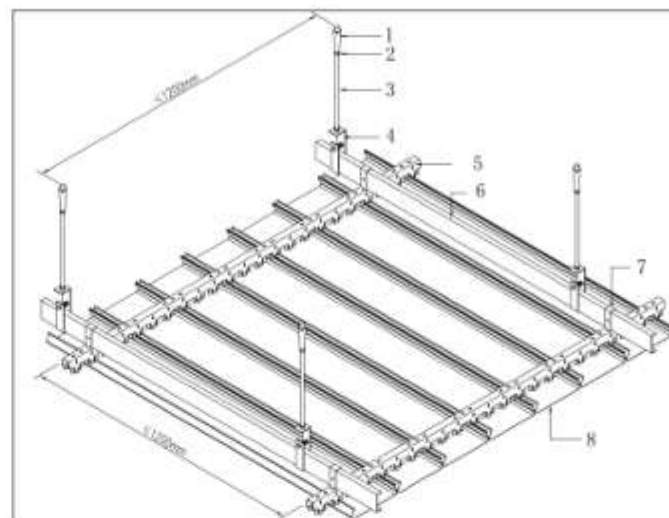

Bevelled edge S-strip Ceiling System

斜角S型条扣天花吊顶系统


1. Anchor bolt
2. Nuts
3. Thread rod
4. Hanger for 38# main channel
5. S-strip carrier
6. 38# main channel
7. C-hanger
8. Bevelled edge S-strip ceiling

1. 拉爆螺丝
2. 螺母
3. 螺杆
4. 38#轻钢龙骨吊件
5. S型条扣龙骨
6. 38#轻钢龙骨
7. C型吊件
8. 斜角S型条扣天花



Section Details:

节点图

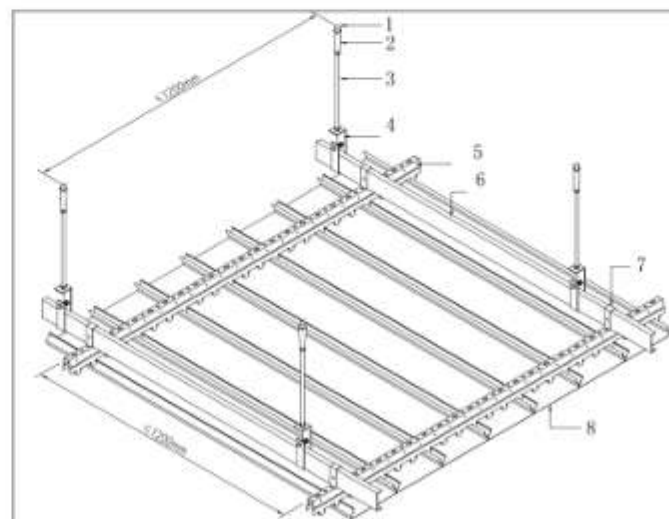

Square edge S-strip Ceiling System

直角S型条扣天花吊顶系统

1. Anchor bolt
2. Nuts
3. Thread rod
4. Hanger for 38# main channel
5. S-strip carrier
6. 38# main channel
7. C-hanger
8. Square edge S-strip ceiling

1. 拉爆螺丝
2. 螺母
3. 螺杆
4. 38#轻钢龙骨吊件
5. S型条扣龙骨
6. 38#轻钢龙骨
7. C型吊件
8. 直角S型条扣天花



Section Details:

节点图



G-strip Ceiling

G型条扣天花吊顶

Key Features:

- Material: aluminum alloy.
- Panel Width: 100/200/300/400mm, etc.
(Customized size is available.)
- Height: 15mm.
- Length: 3000mm/pc as standard, up to 6000mm.
- Thickness: 0.5~0.9mm
- Square edge with 15mm gap design.

Surface finish:

- Powder coating
- PE coating
- PVDF coating
- Pre-painted
- Transfer printing

Color Range:

- The standard color is white, black, grey, etc.
- Wood color and marble color is available.
- Any of the RAL color is available as required.
- Customized colors available.

Application:

Airport, Administration building, Shopping mall, etc.

特征:

- 材料: 铝
- 板宽: 100/200/300/400mm, 等 (可定制尺寸)
- 板高: 15mm
- 长度: 标准长度3000mm/支, 可做到6000mm
- 厚度: 0.5~0.9mm
- 直角设计缝宽15mm

表面处理:


- 粉末喷涂
- 聚酯油漆喷涂
- 氟碳喷涂
- 滚涂 (辊涂)
- 热转印

颜色范围:


- 标准颜色为白色, 黑色, 灰色
- 可做木纹或大理石纹颜色
- 可按要求做任何RAL颜色 (潘通色卡)
- 可定制颜色

应用场合:

机场, 行政大楼, 商场, 等等。

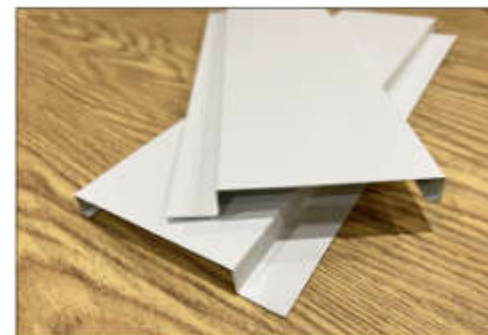

安装图:



- 1、拉爆螺丝
- 2、螺母
- 3、螺杆
- 4、38#轻钢龙骨吊件
- 5、G型条扣龙骨
- 6、38#轻钢龙骨
- 7、G型吊件
- 8、G型条扣天花



H-strip Ceiling

H型条扣天花吊顶



Key Features:

- Material: aluminum alloy.
- Panel Width: 150/200/300/400/500mm as standard. (Customized size is available.)
- Height: 20/30mm.
- Length: 3000mm/pc as standard, up to 6000mm.
- Thickness: 0.5~1.1mm
- Square edge design.

Surface finish:

- Powder coating
- PE coating
- PVDF coating
- Pre-painted
- Transfer printing

Color Range:

- The standard color is white, black, grey, etc.
- Wood color and marble color is available.
- Any of the RAL color is available as required.
- Customized colors available.

Application:

Metro station, Railway station, Shopping mall, etc.

特征:

- 材料: 铝
- 板宽: 150/200/300/400/500mm (可定制尺寸)
- 板高: 20/30mm
- 长度: 标准长度3000mm/支, 可做到6000mm
- 厚度: 0.5~1.1mm
- 直角设计

表面处理:

- 粉末喷涂
- 氟碳漆喷涂
- 氟碳喷涂
- 滚涂 (辊涂)
- 热转印

颜色范围:

- 标准颜色为白色, 黑色, 灰色
- 可做木纹或大理石纹颜色
- 可按要求做任何RAL颜色 (潘通色卡)
- 可定制颜色


应用场合:

地铁站, 火车站, 商场, 等等。



Installation:

安装图:

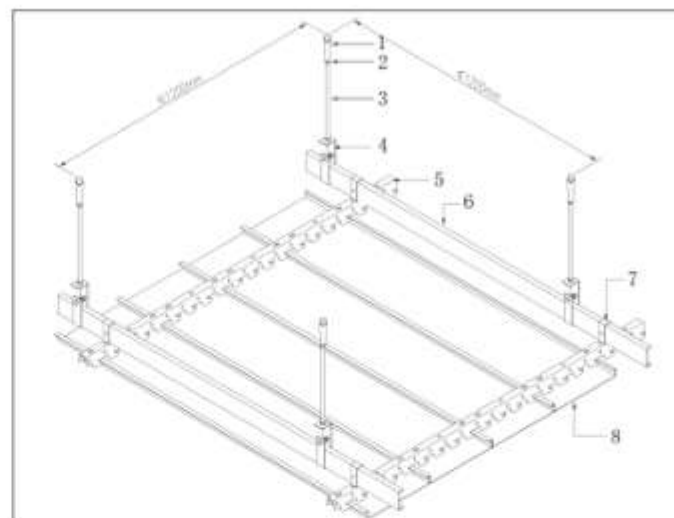

150/200H-strip Ceiling System

150/200H型条扣天花吊顶系统


1. Anchor bolt
2. Nuts
3. Thread rod
4. Hanger for 38# main channel
5. H-strip carrier
6. 38# main channel
7. C-hanger
8. 150/200H-strip ceiling

1. 拉爆螺丝
2. 螺母
3. 螺杆
4. 38#轻钢龙骨吊件
5. 150/200H型条扣龙骨
6. 38#轻钢龙骨
7. C型吊件
8. 150/200H型条扣天花



Section Details:

节点图

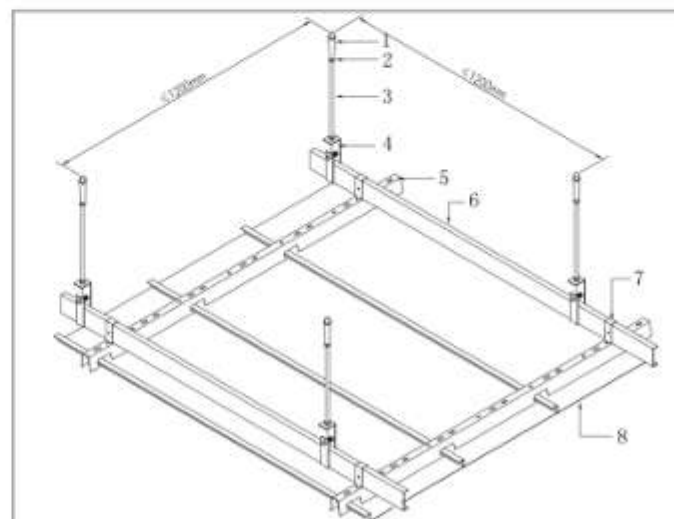

300/400/500H-strip Ceiling System

300/400/500H型条扣天花吊顶系统

1. Anchor bolt
2. Nuts
3. Thread rod
4. Hanger for 38# main channel
5. 300/400/500H-strip carrier
6. 38# main channel
7. C-hanger
8. Square edge S-strip ceiling

1. 拉爆螺丝
2. 螺母
3. 螺杆
4. 38#轻钢龙骨吊件
5. 300/400/500H型条扣龙骨
6. 38#轻钢龙骨
7. C型吊件
8. 300/400/500H型条扣天花



Section Details:

节点图



U-strip Ceiling

U型条扣天花吊顶

Key Features:

- Material: aluminum alloy
- Panel Width: 85/135/185mm, match 15/20mm width infilled panel (Customized size is available.)
- Height: 15mm.
- Length: 3000mm/pc as standard, up to 6000mm.
- Thickness: 0.4~0.8mm
- Curve edge design.

Surface finish:

- Powder coating
- PE coating
- PVDF coating
- Pre-painted
- Transfer printing

Color Range:

- The standard color is white, black, grey, etc.
- Wood color and marble color is available.
- Any of the RAL color is available as required.
- Customized colors available.

Application:

University, Swimming pool, Museum, etc.

特征:

- 材料: 铝
- 板宽: 85/135/185mm, 可搭配15/20mm宽辅条 (可定制尺寸)
- 板高: 15mm
- 长度: 标准长度3000mm/支, 可做到6000mm
- 厚度: 0.4~0.8mm
- 圆弧倒角设计

表面处理:


- 粉末喷涂
- 聚酯油漆喷涂
- 氟碳喷涂
- 滚涂 (辊涂)
- 热转印

颜色范围:

- 标准颜色为白色, 黑色, 灰色
- 可做木纹或大理石纹颜色
- 可按要求做任何RAL颜色 (潘通色卡)
- 可定制颜色


应用场合:

大学, 游泳池, 博物馆, 等等。

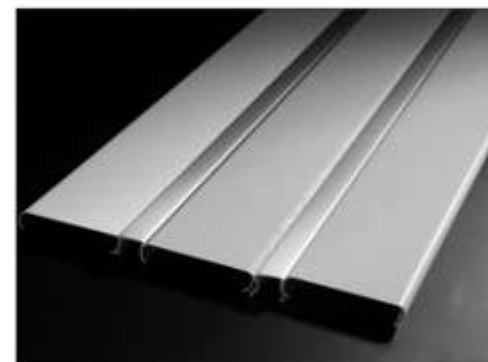

Installation:

安装图:

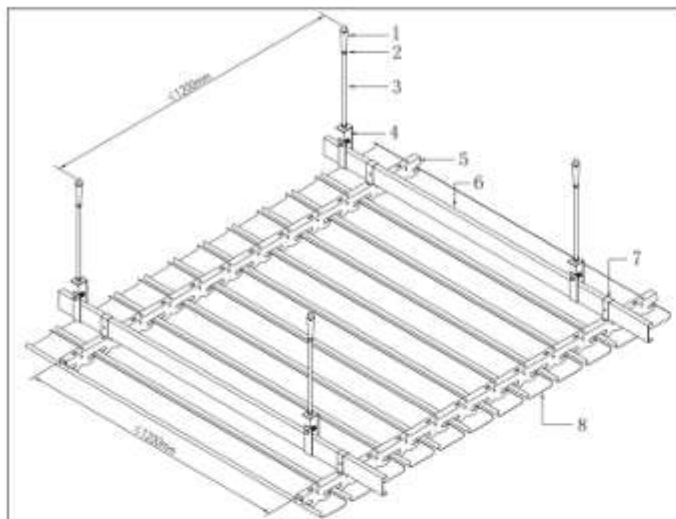


U-strip Ceiling System

U型条扣天花吊顶系统


1. Anchor bolt
2. Nuts
3. Thread rod
4. Hanger for 38# main channel
5. U-strip carrier
6. 38# main channel
7. C-hanger
8. U-strip ceiling

- 1、拉爆螺丝
- 2、螺母
- 3、螺杆
- 4、38#轻钢龙骨吊件
- 5、U型条扣龙骨
- 6、38#轻钢龙骨
- 7、C型吊件
- 8、U型条扣天花



Section Details:

节点图

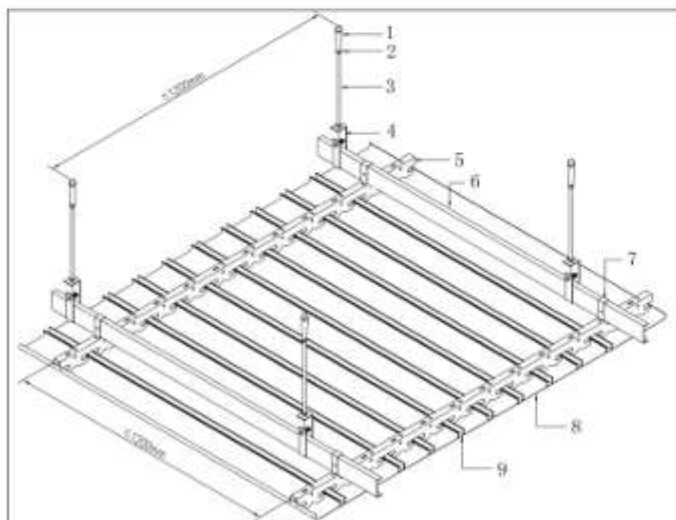

U-strip with infilled Ceiling System

U型条扣搭配镶条天花吊顶系统

1. Anchor bolt
2. Nuts
3. Thread rod
4. Hanger for 38# main channel
5. U-strip carrier
6. 38# main channel
7. C-hanger
8. U-strip ceiling
9. Infilled panel

- 1、拉爆螺丝
- 2、螺母
- 3、螺杆
- 4、38#轻钢龙骨吊件
- 5、U型条扣龙骨
- 6、38#轻钢龙骨
- 7、C型吊件
- 8、U型条扣天花
- 9、镶条



Section Details:

节点图



Hook-on Ceiling

勾搭式天花吊顶



Key Features:

- Material: aluminum alloy & galvanized steel.
- Panel Width: maximum 1500mm
- Panel Length: maximum 4000mm
- Panel Height: 25/30mm.
- (Customized size is available.)
- Thickness: 1, 2~3, 0mm
- Square edge design.

Surface finish:

- Powder coating
- PE coating
- PVDF coating
- Pre-painted
- Transfer printing

Color Range:

- The standard color is white, black, grey, etc.
- Wood color and marble color is available.
- Any of the RAL color is available as required.
- Customized colors available.

Application:

Bank, Government building, Metro station, etc.

特征:

- 材料: 铝或镀锌钢
- 板宽度: 1500mm以内
- 板长度: 4000mm以内
- 板高度: 25/30mm
- (可定制尺寸)
- 厚度: 1, 2~3, 0mm
- 直角设计

表面处理:

- 粉末喷涂
- 聚酯油漆喷涂
- 氟碳喷涂
- 滚涂 (辊涂)
- 热转印

颜色范围:

- 标准颜色为白色, 黑色, 灰色
- 可做木纹或大理石纹颜色
- 可按客户要求任何RAL颜色 (潘通色卡)
- 可定制颜色


应用场合:

银行, 政府大楼, 地铁站, 等等。



Installation:

安装图:

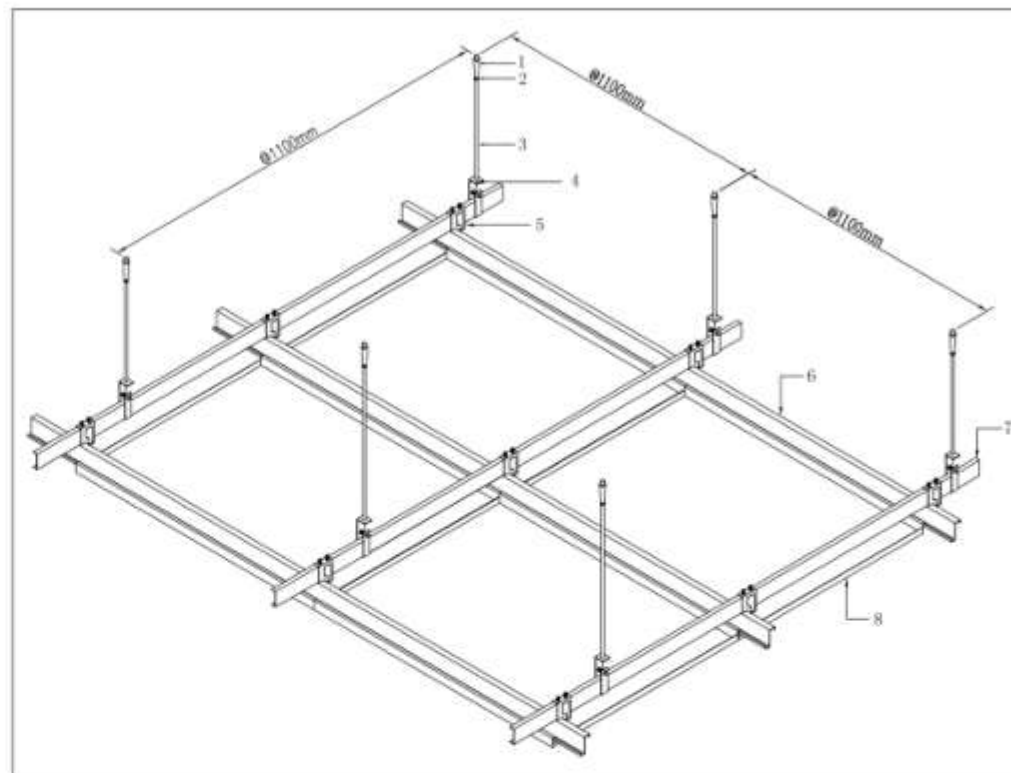


Hook-on Ceiling System

勾搭式天花吊顶系统


1. Anchor bolt
2. Nuts
3. Thread rod
4. Hanger for 38#/50# main channel
5. Z-hanger
6. Z-shaped carrier
7. 38#/50# main channel
8. Hook-on ceiling

1. 拉爆螺丝
2. 螺母
3. 螺杆
4. 38#/50#轻钢龙骨吊件
5. Z型龙骨吊件
6. Z型勾搭龙骨
7. 38#/50#轻钢龙骨
8. 勾搭式天花

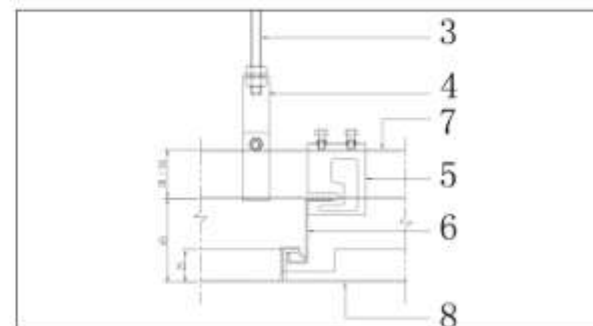

Section Details:

节点图

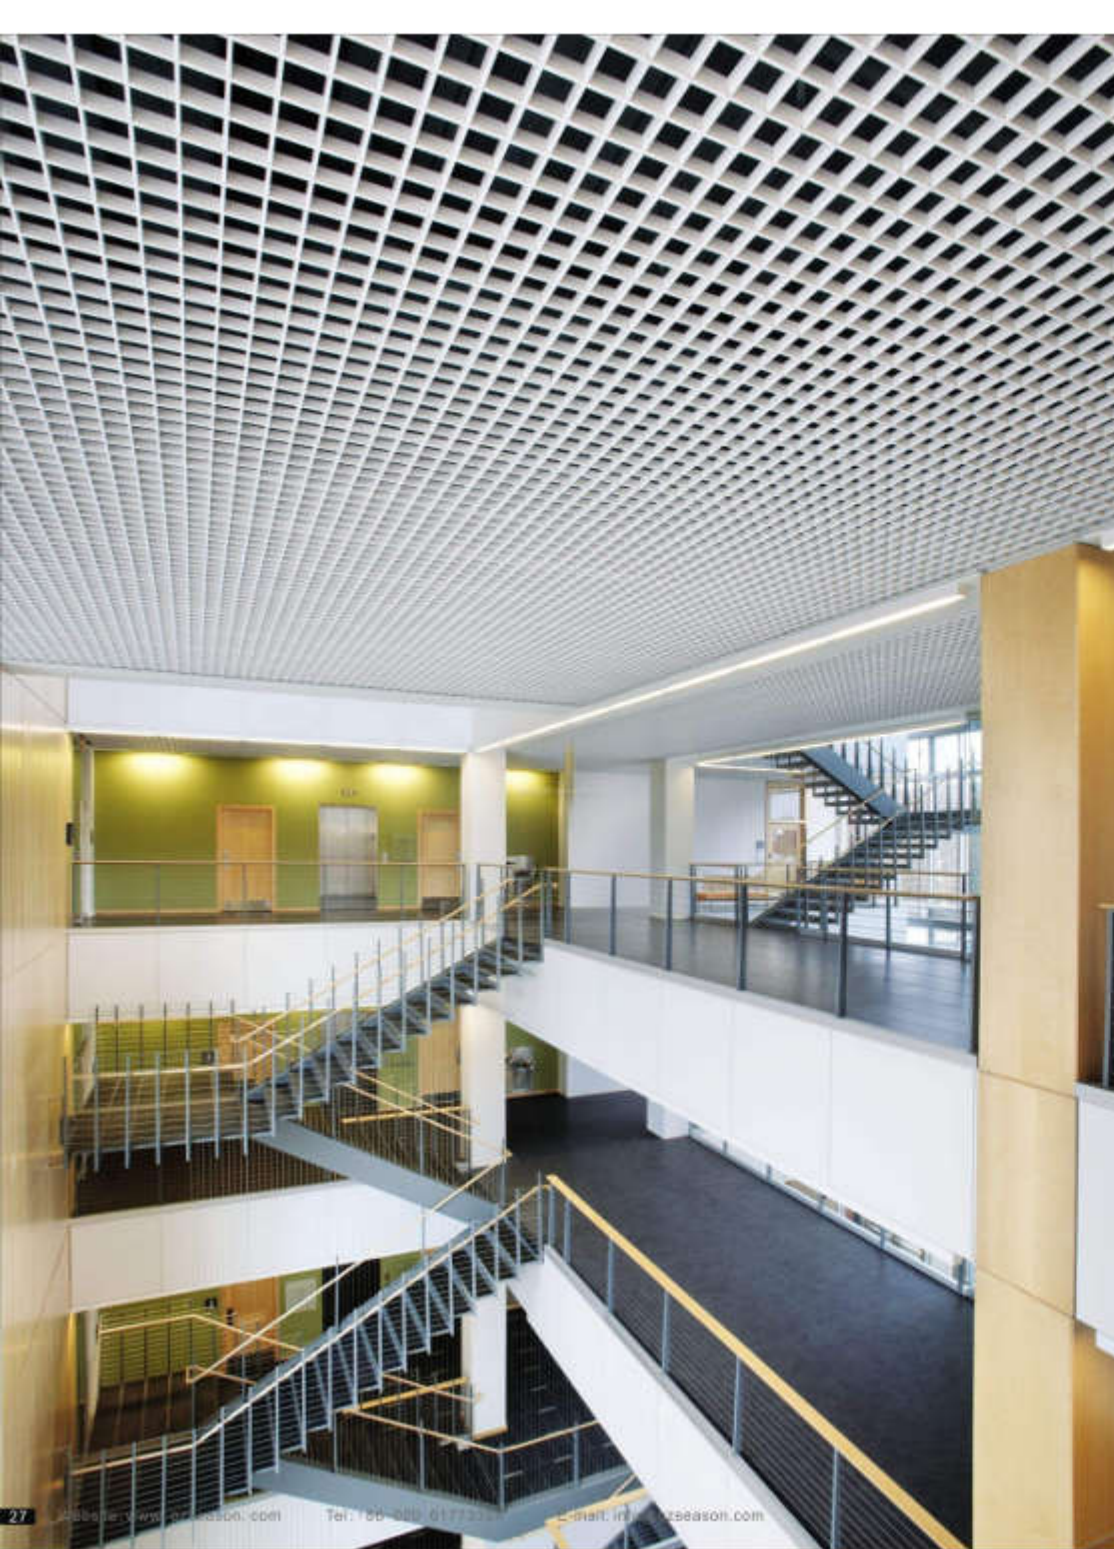

Grid Ceiling/Cell Ceiling

格栅天花/单元格天花吊顶

Key Features:

- Material: aluminum alloy.
- Width: 10/15/20/30mm, etc.
(Customized size is available.)
- Height: 30~120mm.
- Length: 2000mm / pc as standard
- Thickness: 0.3~0.9mm
- Module/cell size (Square or Triangular):
50x50, 100x100, 125x125, 150x150, 200x200, 250x250,
300x300mm, etc.
- Square edge design.

Surface finish:

- Powder coating
- PE coating
- PVDF coating
- Pre-painted
- Transfer printing

Color Range:

- The standard color is white, black, grey, etc.
- Wood color and marble color is available.
- Any of the RAL color is available as required.
- Customized colors available.

Application:

Gym center, Shopping mall, Super market, etc.

特征:

- 材料: 铝
- 宽度: 10/15/20/30mm, 等 (可定制尺寸)
- 高度: 30~120mm
- 长度: 标准长度2000mm/支
- 厚度: 0.3~0.9mm
- 模块/单元尺寸 (方形或三角形):
50x50, 100x100, 125x125, 150x150, 200x200,
250x250, 300x300mm, 等 (可定制尺寸)
- 直角设计

表面处理:



- 粉末喷涂
- 聚酯油漆喷涂
- 氟碳喷涂
- 滚涂 (铝涂)
- 热转印

颜色范围:

- 标准颜色为白色, 黑色, 灰色
- 可做木纹或大理石纹颜色
- 可按客户要求任何RAL颜色 (潘通色卡)
- 可定制颜色


应用场合:

体育中心, 商场, 超市, 等等。

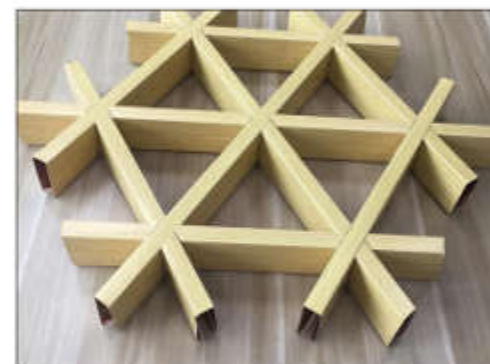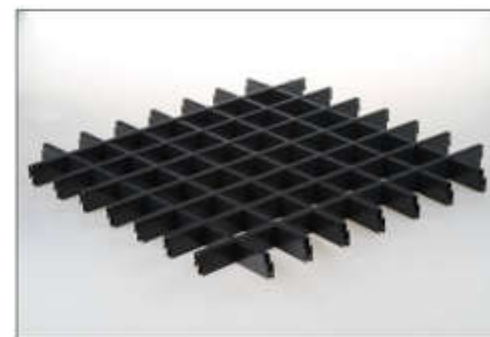


Installation:

安装图:

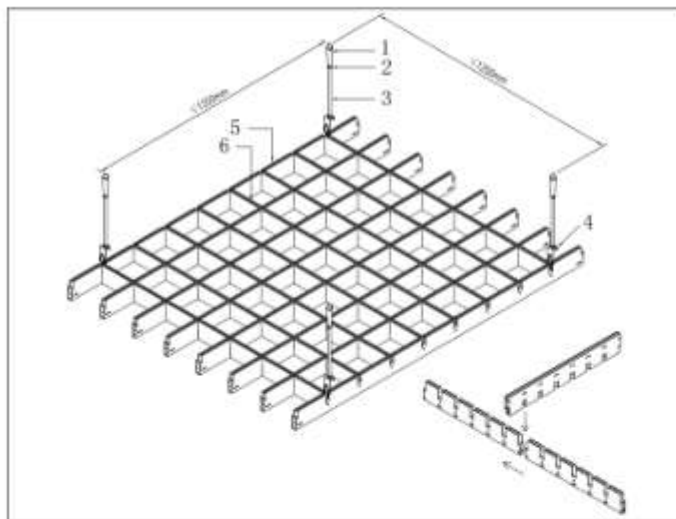

1. Anchor bolt
2. Nuts
3. Thread rod
4. Hanger for main carrier
5. Main carrier
6. Cross carrier

- 1、拉爆螺丝
- 2、螺母
- 3、螺杆
- 4、格栅吊件
- 5、主格栅
- 6、副格栅




Grid Ceiling System

格栅天花吊顶系统


Section Details:

节点图

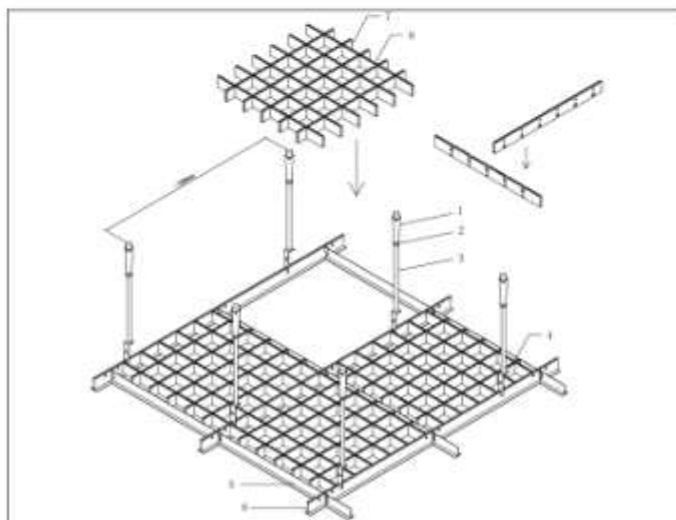

1. Anchor bolt
2. Nuts
3. Thread rod
4. Hanger for main T-bar
5. Cross T-bar
6. Main T-bar
7. Main carrier
8. Cross carrier

- 1、拉爆螺丝
- 2、螺母
- 3、螺杆
- 4、T型主龙骨吊件
- 5、T型副龙骨
- 6、T型主龙骨
- 7、主格栅
- 8、副格栅



Grid Ceiling with T-bar System

使用T型龙骨的格栅天花吊顶系统

Section Details:

节点图



A-screen Ceiling

A型挂片天花吊顶



Key Features:

- Material: aluminum alloy.
- Width: 21mm as standard,
Height: 100/125/150/200mm
(Customized size is available.).
- Length: 3000mm/pc as standard, up to 6000mm.
- Thickness: 0.4~0.8mm

Surface finish:

- Powder coating
- PE coating
- PVDF coating
- Pre-painted
- Transfer printing

Color Range:

- The standard color is white, black, grey, etc.
- Wood color and marble color is available.
- Any of the RAL color is available as required.
- Customized colors available.

Application:

Metro station, Convention center, Shopping mall, etc.

特征:

- 材料: 铝
- 宽度: 标准宽度21mm
高度: 100/125/150/200mm (可定制尺寸)
- 长度: 标准长度3000mm/支, 可做到6000mm
- 厚度: 0.4~0.8mm

表面处理:



- 粉末喷涂
- 聚酯油漆喷涂
- 氟碳喷涂
- 滚涂 (铝涂)
- 热转印

颜色范围:

- 标准颜色为白色, 黑色, 灰色
- 可做木纹或大理石纹颜色
- 可按要求做任何RAL颜色 (潘通色卡)
- 可定制颜色


应用场合:

地铁站, 会展中心, 商场, 等等。

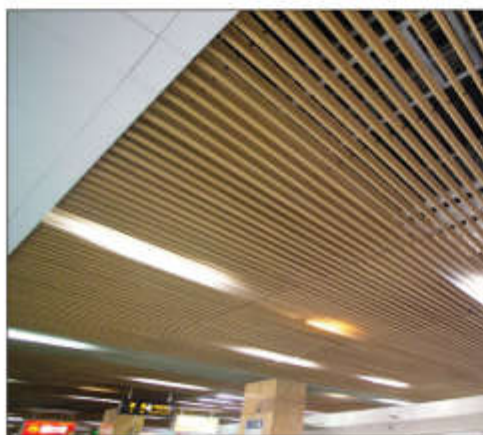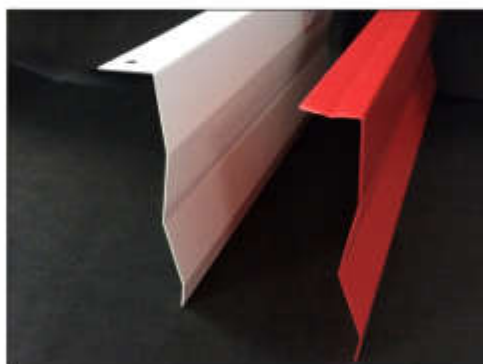

Installation:

安装图:

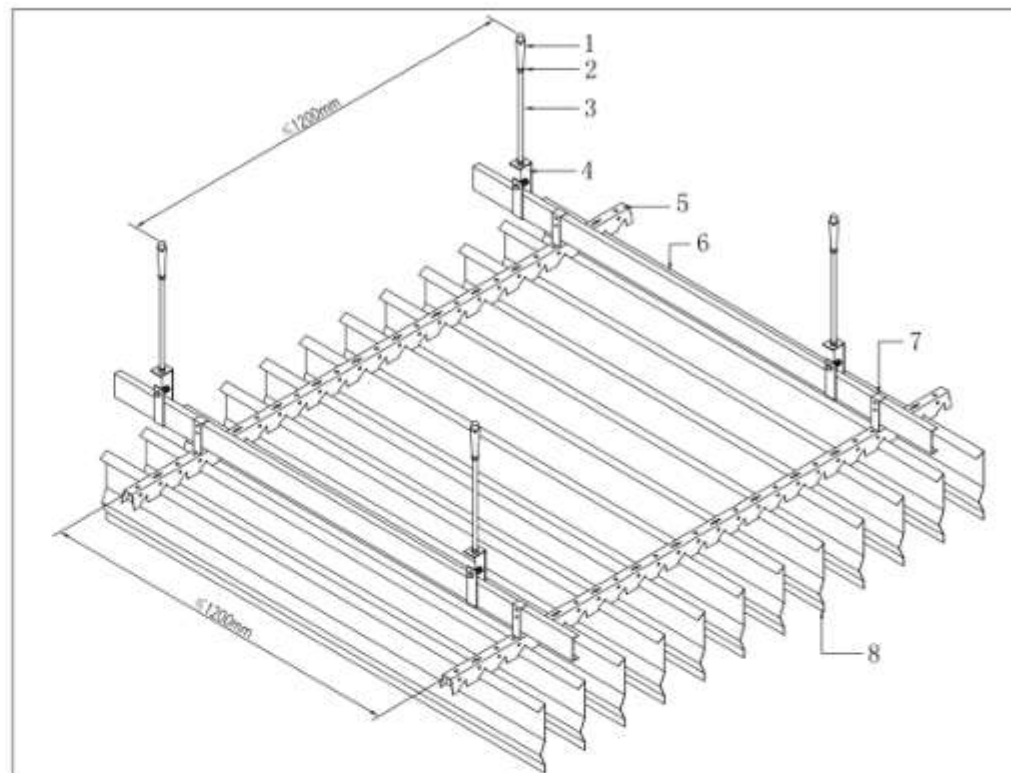


A-screen Ceiling System

A型挂片天花吊顶系统

1. Anchor bolt
2. Nuts
3. Thread rod
4. Hanger for 38# main channel
5. A-screen carrier
6. 38# main channel
7. C-hanger
8. A-screen ceiling

1. 拉爆螺丝
2. 螺母
3. 螺杆
4. 38#轻钢龙骨吊件
5. A型挂片龙骨
6. 38#轻钢龙骨
7. C型吊件
8. A型挂片天花

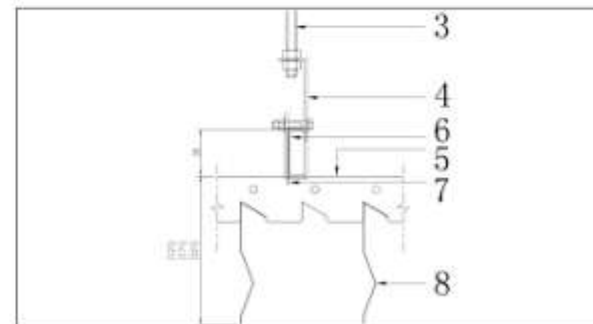

Section Details:

节点图



B-screen Ceiling

B型挂片天花吊顶



Key Features:

- Material: aluminum alloy.
- Width: 8mm as standard.
- Height: 100/125/150/200mm (Customized size is available.).
- Length: 3000mm/pc as standard, up to 6000mm.
- Thickness: 0.4~0.8mm

Surface finish:

- Powder coating
- PE coating
- PVDF coating
- Pre-painted
- Transfer printing

Color Range:

- The standard color is white, black, grey, etc.
- Wood color and marble color is available.
- Any of the RAL color is available as required.
- Customized colors available.

Application:

Metro station, Convention center, Shopping mall, etc.

特征:

- 材料: 铝
- 宽度: 标准宽度8mm
- 高度: 100/125/150/200mm (可定制尺寸)
- 长度: 标准长度3000mm/支, 可做到6000mm
- 厚度: 0.4~0.8mm

表面处理:


- 粉末喷涂
- 聚酯油漆喷涂
- 氟碳喷涂
- 滚涂 (辊涂)
- 热转印

颜色范围:

- 标准颜色为白色, 黑色, 灰色
- 可做木纹或大理石纹颜色
- 可按要求做任何RAL颜色 (潘通色卡)
- 可定制颜色


应用场合:

地铁站, 会展中心, 商场, 等等。

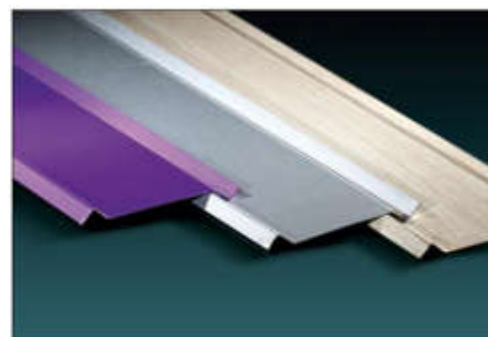

Installation:

安装图:

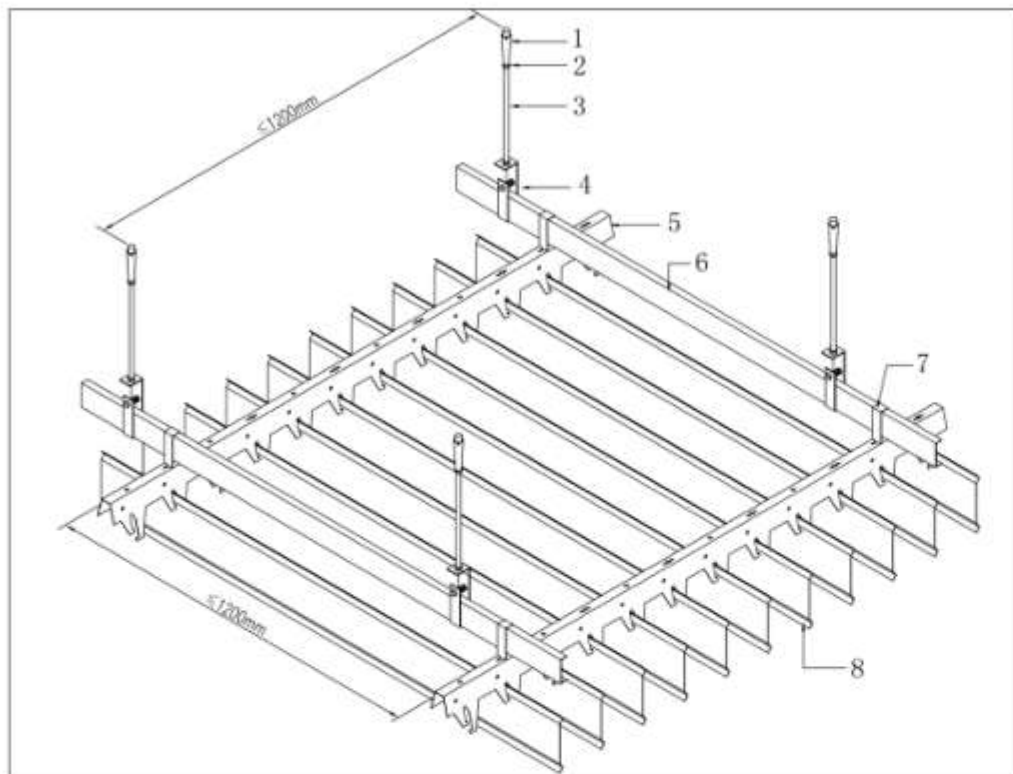


B-screen Ceiling System

B型挂片天花吊顶系统

1. Anchor bolt
2. Nuts
3. Thread rod
4. Hanger for 38# main channel
5. B-screen carrier
6. 38# main channel
7. C-hanger
8. B-screen ceiling

- 1、拉爆螺丝
- 2、螺母
- 3、螺栓
- 4、38#轻钢龙骨吊件
- 5、B型挂片龙骨
- 6、38#轻钢龙骨
- 7、C型吊件
- 8、B型挂片天花

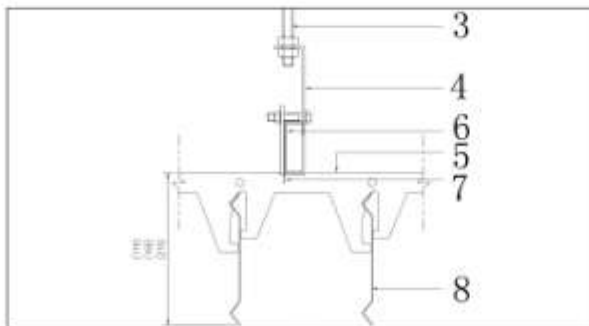

Section Details:

节点图



E-screen Ceiling

E型挂片天花吊顶



Key Features:

- Material: aluminum alloy.
- Width: 23mm as standard, Height: 100/125mm (Customized size is available.).
- Length: 3000mm/pc as standard, up to 6000mm.
- Thickness: 0.5~0.7mm

Surface finish:

- Powder coating
- PE coating
- PVDF coating
- Pre-painted
- Transfer printing

Color Range:

- The standard color is white, black, grey, etc.
- Wood color and marble color is available.
- Any of the RAL color is available as required.
- Customized colors available.

Application:

Metro station, Convention center, Shopping mall, etc.

特征:

- 材料: 铝
- 宽度: 标准宽度23mm
- 高度: 100/125mm (可定制尺寸)
- 长度: 标准长度3000mm/支, 可做到6000mm
- 厚度: 0.5~0.7mm

表面处理:


- 粉末喷涂
- 氟碳油漆喷涂
- 氟碳喷涂
- 滚涂 (辊涂)
- 热转印

颜色范围:

- 标准颜色为白色, 黑色, 灰色
- 可做木纹或大理石纹颜色
- 可按要求做任何RAL颜色 (潘通色卡)
- 可定制颜色


应用场合:

地铁站, 会展中心, 商场, 等等。

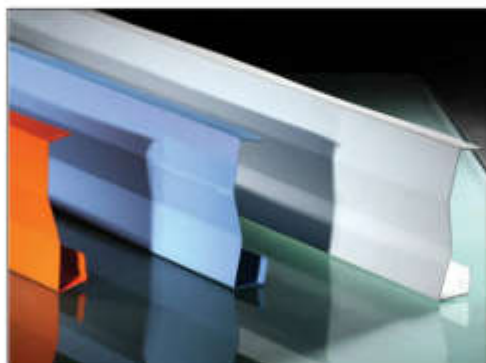

Installation:

安装图:

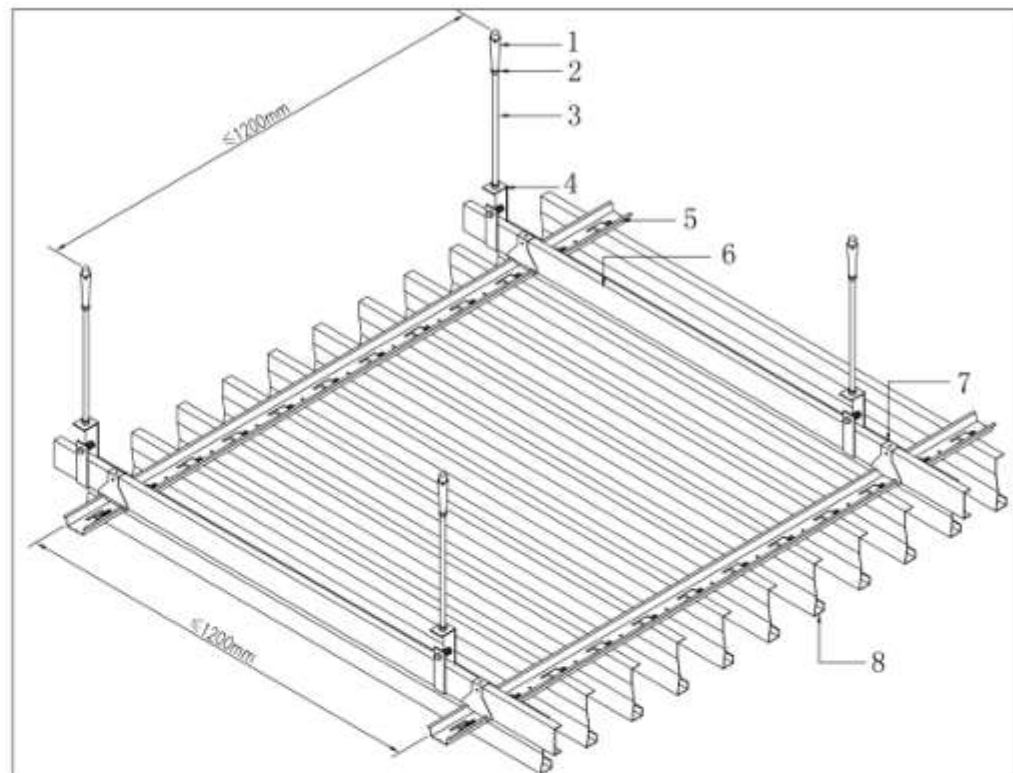


E-screen Ceiling System

E型挂片天花吊顶系统

1. Anchor bolt
2. Nuts
3. Thread rod
4. Hanger for 38# main channel
5. E-screen carrier
6. 38# main channel
7. C-hanger
8. E-screen ceiling

1. 拉爆螺丝
2. 螺母
3. 螺杆
4. 38#轻钢龙骨吊件
5. E型挂片龙骨
6. 38#轻钢龙骨
7. C型吊件
8. E型挂片天花

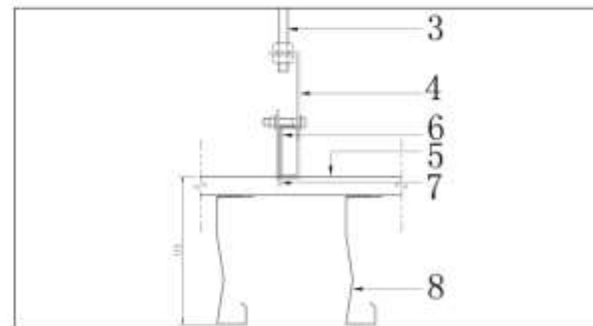

Section Details:

节点图



U-baffle Ceiling

U型方通天花吊顶



Key Features:

- Material: aluminum alloy & galvanized steel.
- Width: 20~300mm (Customized size is available.)
- Height: 20~300mm (Customized size is available.)
- Length: 3000mm/pc as standard, up to 6000mm.
- Thickness: 0.5~3.0mm

Surface finish:

- Powder coating
- PE coating
- PVDF coating
- Pre-painted
- Transfer printing

Color Range:

- The standard color is white, black, grey, etc.
- Wood color and marble color is available.
- Any of the RAL color is available as required.
- Customized colors available.

Application:

Hotel, Metro station, airport, etc.

特征:

- 材料: 铝或镀锌钢
- 宽度: 20~300mm (可定制尺寸)
- 高度: 20~300mm (可定制尺寸)
- 长度: 标准长度3000mm/支, 可做到6000mm
- 厚度: 0.5~3.0mm

表面处理:

- 粉末喷涂
- 聚酯油漆喷涂
- 氟碳喷涂
- 滚涂 (辊涂)
- 热转印

颜色范围:

- 标准颜色为白色, 黑色, 灰色
- 可做木纹或大理石纹颜色
- 可按要求做任何RAL颜色 (潘通色卡)
- 可定制颜色


应用场合:

酒店, 地铁站, 机场, 等等。



Installation:

安装图:

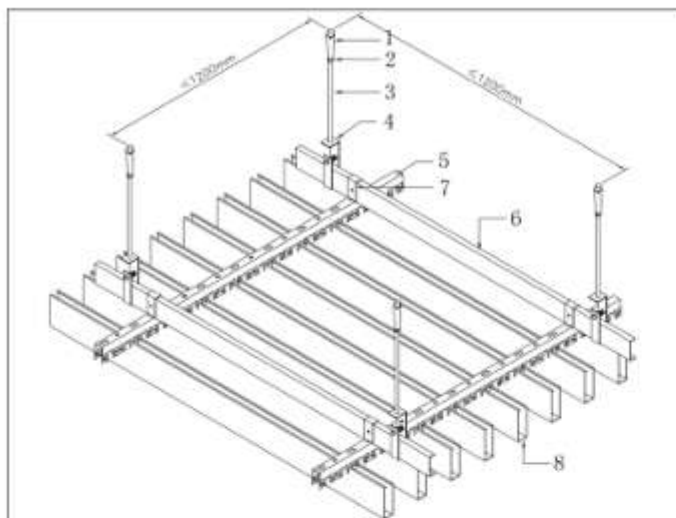


U-baffle Ceiling System

U型方通天花吊顶系统


1. Anchor bolt
2. Nuts
3. Thread rod
4. Hanger for 38# main channel
5. U-baffle carrier
6. 38# main channel
7. C-hanger
8. U-baffle ceiling

1. 拉爆螺丝
2. 螺母
3. 螺杆
4. 38#轻钢龙骨吊件
5. U型方通龙骨
6. 38#轻钢龙骨
7. C型吊件
8. U型方通天花



Section Details:

节点图

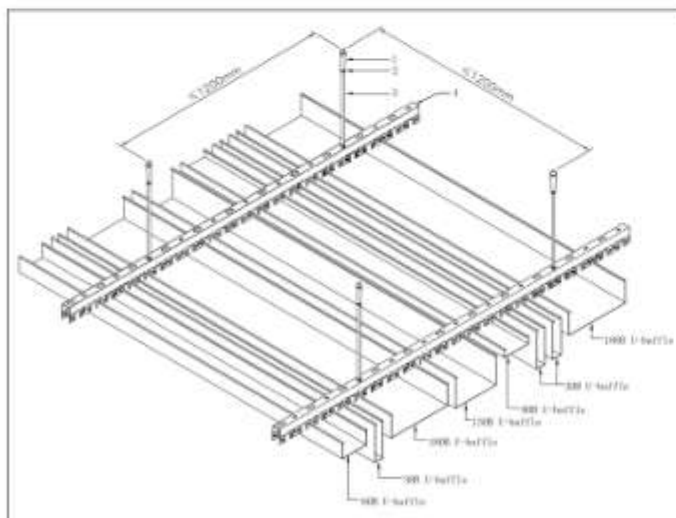


Multi U-baffle Ceiling System

组合U型方通天花吊顶系统

- Multi-size baffle:
30B/80B/130B/180B
1. Anchor bolt
 2. Nuts
 3. Thread rod
 4. U-baffle carrier

- 组合方通尺寸:
30B/80B/130B/180B
1. 拉爆螺丝
 2. 螺母
 3. 螺杆
 4. U型方通龙骨



Section Details:

节点图



Box-baffle Ceiling

型材方通天花吊顶



Key Features:

- Material: 6063T6 aluminum alloy.
- Box Width: 20/25/30/35/40/50/60/70/75/80/100/200mm (Customized size is available.)
- Box Height: 40~300mm (Customized size is available.)
- Length: 3000mm/pc as standard, up to 6000mm.
- Thickness: 0.7~3.0mm

Surface finish:

- Powder coating
- PE coating
- PVDF coating
- Transfer printing

Color Range:

- The standard color is white, black, grey, etc.
- Wood color and marble color is available.
- Any of the RAL color is available as required.
- Customized colors available.

Application:

Metro station, Shopping mall, Parking lot, etc.

特征:

- 材料: 6063T6 铝
- 宽度: 20/25/30/35/40/50/60/70/75/80/100/200mm (可定制尺寸)
- 高度: 40~300mm (可定制尺寸)
- 长度: 标准长度3000mm/支, 可做到6000mm
- 厚度: 0.7~3.0mm

表面处理:


- 粉末喷涂
- 聚酯油漆喷涂
- 氟碳喷涂
- 热转印

颜色范围:

- 标准颜色为白色, 黑色, 灰色
- 可做木纹或大理石纹颜色
- 可按客户要求任何RAL颜色 (潘通色卡)
- 可定制颜色


应用场合:

地铁站, 商场, 停车场, 等等.

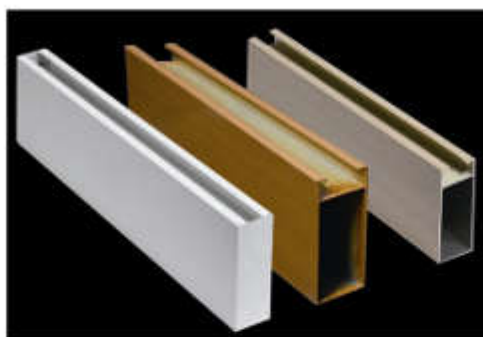

Installation:

安装图:

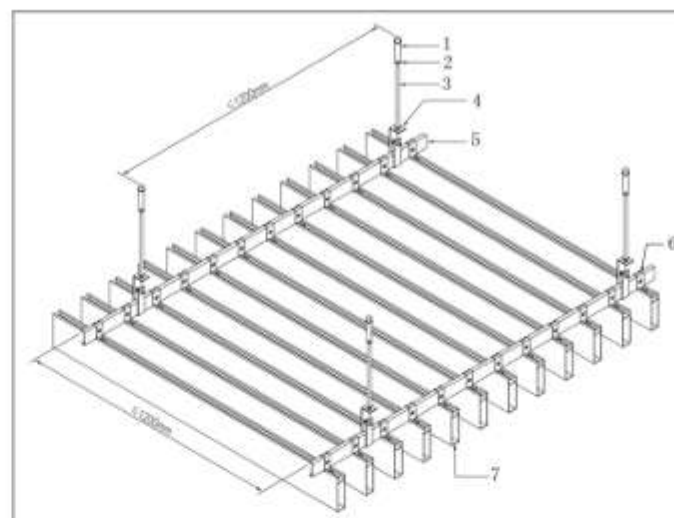

1. Anchor bolt
2. Nuts
3. Thread rod
4. Hanger for 38# main channel
5. Perforated 38# main channel
6. Box-baffle hanger
7. Box-baffle ceiling

1. 拉爆螺丝
2. 螺母
3. 螺杆
4. 38#轻钢龙骨吊件
5. 冲孔38#轻钢龙骨
6. 型材方通吊件
7. 型材方通天花




Box-baffle with 38# main channel Ceiling System

使用38#轻钢龙骨的型材方通天花吊顶系统

Section Details:

节点图

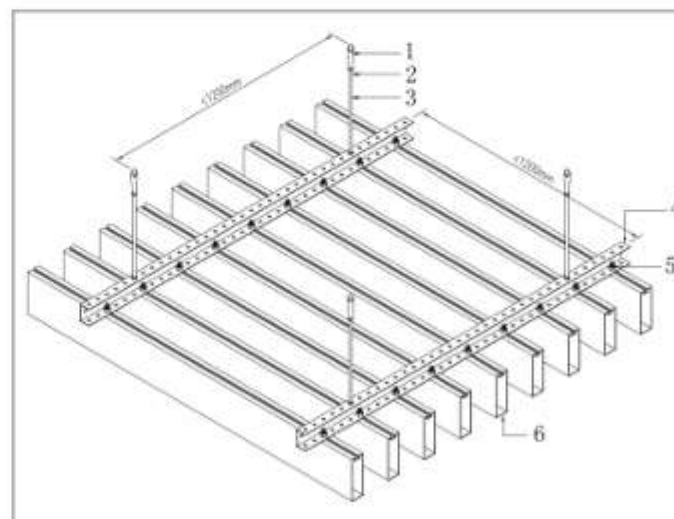

1. Anchor bolt
2. Nuts
3. Thread rod
4. C-channel
5. Hexagon bolt
6. Box-baffle ceiling

1. 拉爆螺丝
2. 螺母
3. 螺杆
4. C型龙骨
5. 六角对串螺栓
6. 型材方通天花



Box-baffle with C-channel Ceiling System

使用C型龙骨的型材方通天花吊顶系统

Section Details:

节点图



Tubular-baffle Ceiling

型材圆通天花吊顶

Key Features:

- Material: 6063T6 aluminum alloy.
- Tubular Dia: 25/30/40/50/60/65/70/80/100/120mm
(Customized size is available.)
- Length: 3000mm/pc as standard, up to 6000mm.
- Thickness: 0.7~1.8mm

Surface finish:

- Powder coating
- PE coating
- PVDF coating
- Transfer printing

Color Range:

- The standard color is white, black, grey, etc.
- Wood color and marble color is available.
- Any of the RAL color is available as required.
- Customized colors available.

Application:

Metro station, Shopping mall, Super market, etc.

特征:

- 材料: 6063T6 铝
- 直径: 25/30/40/50/60/65/70/80/100/120mm
(可定制尺寸)
- 长度: 标准长度3000mm/支, 可做到6000mm
- 厚度: 0.7~1.8mm

表面处理:

- 粉末喷涂
- 聚酯油漆喷涂
- 氟碳喷涂
- 热转印

颜色范围:

- 标准颜色为白色, 黑色, 灰色
- 可做木纹或大理石纹颜色
- 可按要求做任何RAL颜色 (潘通色卡)
- 可定制颜色


应用场合:

地铁站, 商场, 超市, 等等。




Installation:

安装图:

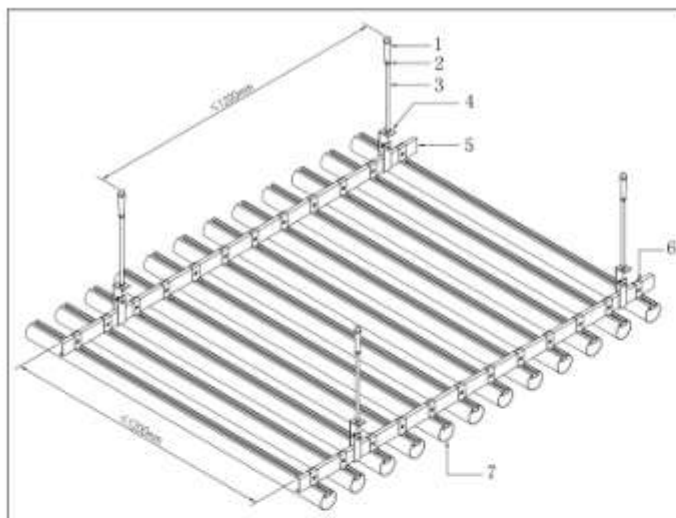

1. Anchor bolt
2. Nuts
3. Thread rod
4. Hanger for main carrier
5. Perforated 38# main channel
6. Tubular-baffle hanger
7. Tubular-baffle ceiling

1. 拉爆螺丝
2. 螺母
3. 螺杆
4. 38#轻钢龙骨吊件
5. 冲孔38#轻钢龙骨
6. 型材圆通吊件
7. 型材圆通天花




Section Details:

节点图


Tubular-baffle with 38# main channel Ceiling System

使用38#轻钢龙骨的型材圆通天花吊顶系统

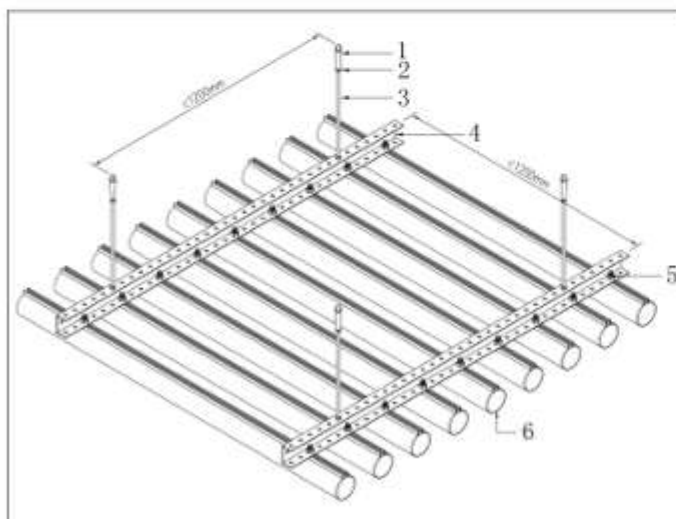

1. Anchor bolt
2. Nuts
3. Thread rod
4. C-channel
5. Hexagon bolt
6. Tubular-baffle ceiling

1. 拉爆螺丝
2. 螺母
3. 螺杆
4. C型龙骨
5. 六角螺栓
6. 型材圆通天花




Section Details:

节点图

Tubular-baffle with C-channel Ceiling System

使用C型龙骨的型材圆通天花吊顶系统

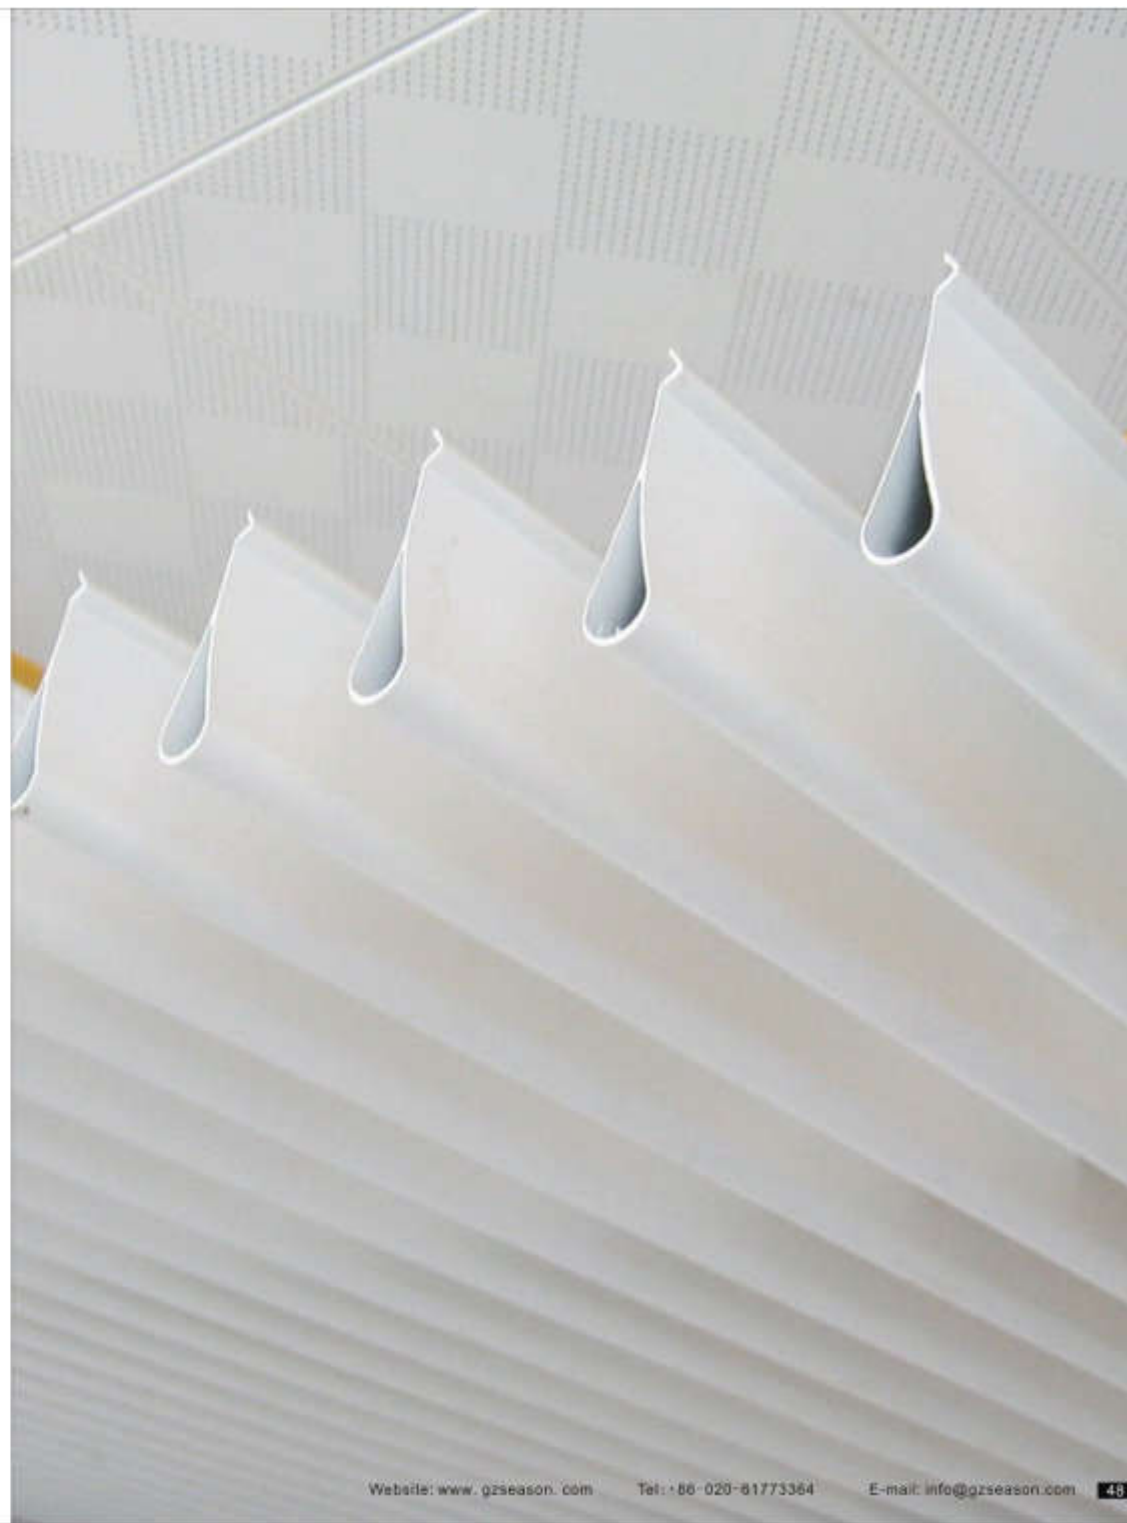

Dripping-baffle Ceiling

滴水型材天花吊顶



Key Features:

- Material: 6063T6 aluminum alloy.
- Size: 17Wx70H, 25Wx75H, 18Wx80H, 18Wx85H, 18Wx90H, 18Wx95H, 18Wx100H, 20Wx100H, 25Wx100H, 25Wx120H, 25Wx125H, 25Wx150H, 35Wx150H, 50Wx150H mm.
- (Customized size is available.)
- Length: 3000mm/pc as standard, up to 6000mm.
- Thickness: 0.7~1.3mm

Surface finish:

- Powder coating
- PE coating
- PVDF coating
- Transfer printing

Color Range:

- The standard color is white, black, grey, etc.
- Wood color and marble color is available.
- Any of the RAL color is available as required.
- Customized colors available.

Application:

Metro station, Convention center, Shopping mall, etc.

特征:

- 材料: 6063T6 铝
- 尺寸: 17Wx70H, 25Wx75H, 18Wx80H, 18Wx85H, 18Wx90H, 18Wx95H, 18Wx100H, 20Wx100H, 25Wx100H, 25Wx120H, 25Wx125H, 25Wx150H, 35Wx150H, 50Wx150H mm. (可定制尺寸)
- 长度: 标准长度3000mm/支, 可做到6000mm
- 厚度: 0.7~1.3mm

表面处理:

- 粉末喷涂
- 聚酯油漆喷涂
- 氟碳喷涂
- 热转印

颜色范围:

- 标准颜色为白色, 黑色, 灰色
- 可做木纹或大理石纹颜色
- 可按要求做任何RAL颜色 (潘通色卡)
- 可定制颜色


应用场合:

地铁站, 会展中心, 商场, 等等.



Installation:

安装图:

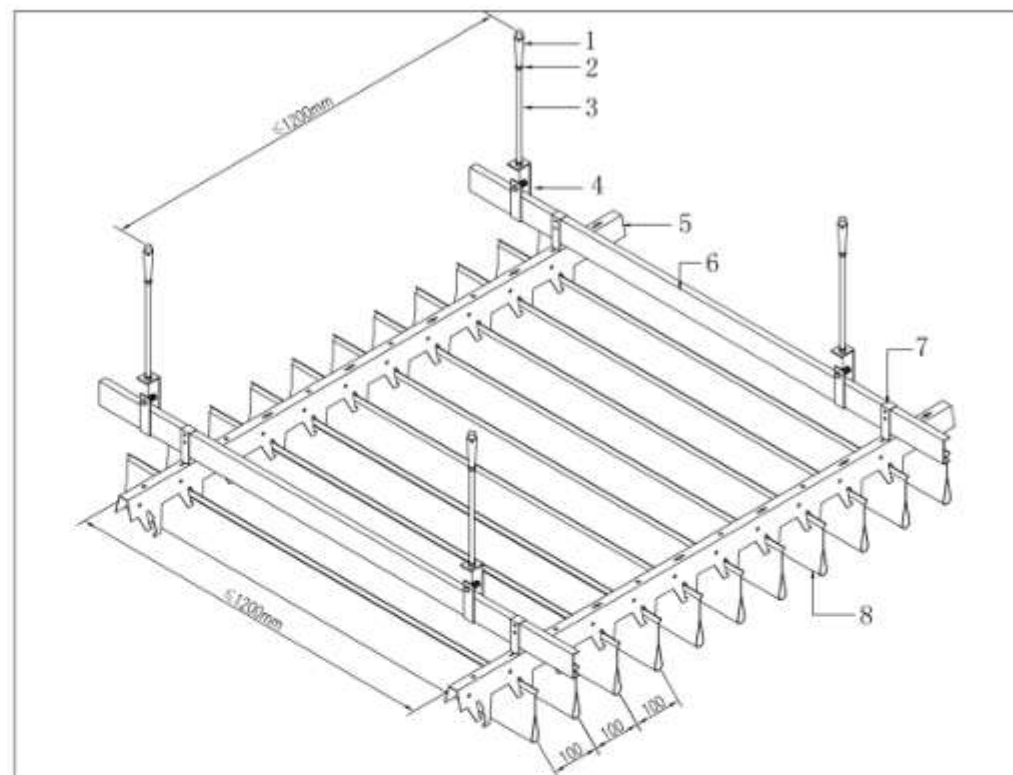


Dripping-baffle Ceiling System

滴水型材天花吊顶系统

1. Anchor bolt
2. Nuts
3. Thread rod
4. Hanger for 38# main channel
5. Dripping-baffle carrier
6. 38# main channel
7. C-hanger
8. Dripping-baffle ceiling

1. 拉爆螺丝
2. 螺母
3. 螺杆
4. 38#轻钢龙骨吊件
5. 滴水型材龙骨
6. 38#轻钢龙骨
7. C型吊件
8. 滴水型材天花

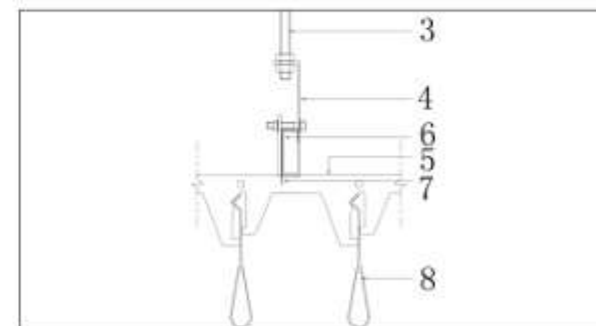

Section Details:

节点图



Bullet-baffle Ceiling

型材子弹型天花吊顶



Key Features:

- Material: 6063T6 aluminum alloy.
- Size: 20Wx100H, 25Wx100H, 50Wx75H, 30Wx95H, 40Wx100H, 50Wx100H, 50Wx120H, 50Wx150H mm (Customized size is available).
- Length: 3000mm/pc as standard, up to 6000mm.
- Thickness: 0.8~1.5mm

Surface finish:

- Powder coating
- PE coating
- PVDF coating
- Transfer printing

Color Range:

- The standard color is white, black, grey, etc.
- Wood color and marble color is available.
- Any of the RAL color is available as required.
- Customized colors available.

Application:

Metro station, Convention center, Shopping mall, etc.

特征:

- 材料: 6063T6 铝
- 尺寸: 20Wx100H, 25Wx100H, 50Wx75H, 30Wx95H, 40Wx100H, 50Wx100H, 50Wx120H, 50Wx150H mm (可定制尺寸)
- 长度: 标准长度3000mm/支, 可做到6000mm
- 厚度: 0.8~1.5mm

表面处理:



- 粉末喷涂
- 聚酯油漆喷涂
- 氟碳喷涂
- 热转印

颜色范围:

- 标准颜色为白色, 黑色, 灰色
- 可做木纹或大理石纹颜色
- 可按要求做任何RAL颜色 (潘通色卡)
- 可定制颜色


应用场合:

地铁站, 会展中心, 商场, 等等。

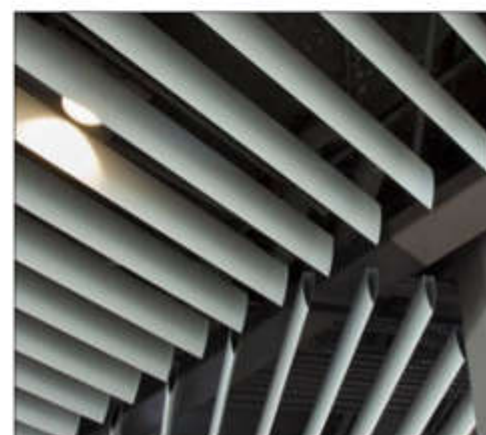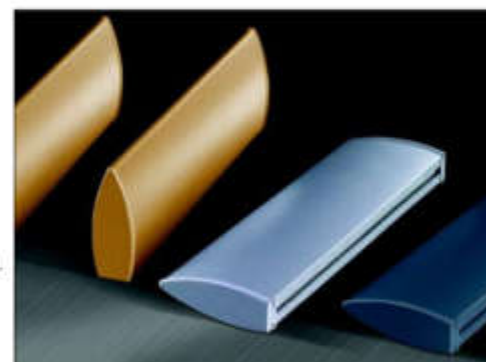

Installation:

安装图:

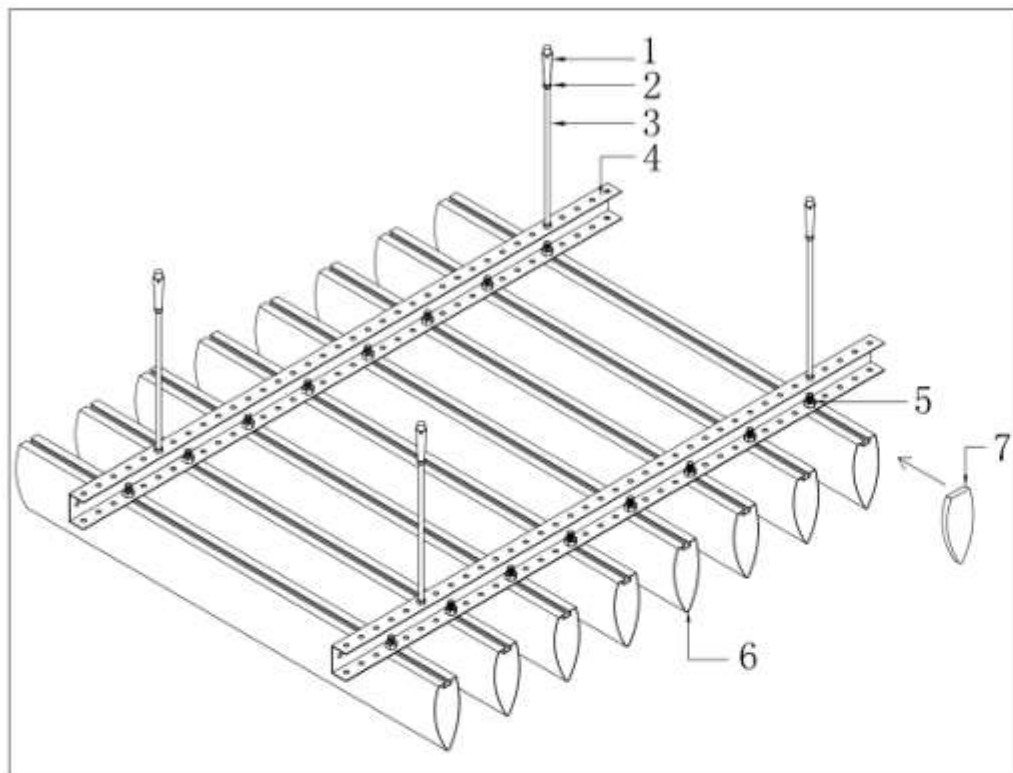


Bullet-baffle Ceiling System

型材子弹头天花吊顶系统

1. Anchor bolt
2. Nuts
3. Thread rod
4. C-channel
5. Hexagon bolt
6. Bullet-baffle ceiling
7. End cap

- 1、拉爆螺丝
- 2、螺母
- 3、螺杆
- 4、C型龙骨
- 5、六角螺栓
- 6、型材子弹头天花
- 7、封盖

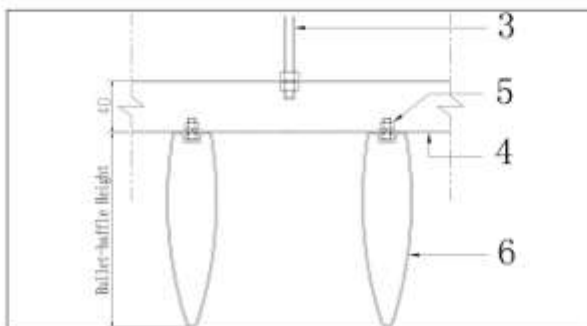

Section Details:

节点图



Triangular clip-in Ceiling

三角形扣板天花吊顶



Key Features:

- Material: aluminum alloy.
- Panel size: 1000x1000x1000, 1200x1200x1200mm.
- Thickness: 0.7-1.0mm.
- Square edge or bevelled edge.

Surface finish:


- Powder coating
- PE coating
- PVDF coating
- Pre-painted
- Transfer printing

Color Range:

- The standard color is white, black, grey, etc.
- Wood color and marble color is available.
- Any of the RAL color is available as required.
- Customized colors available.

Application:

Metro station, Convention center, Office building, etc.

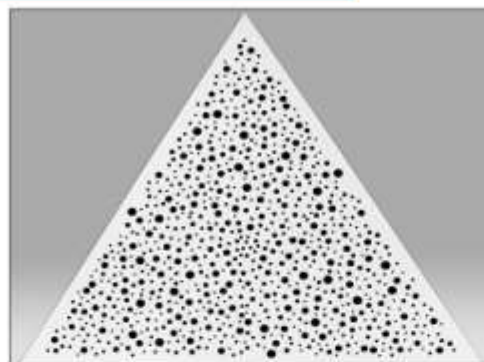

特征:

- 材料: 铝
- 尺寸: 1000x1000x1000, 1200x1200x1200mm
- 厚度: 0.7-1.0mm
- 直角或斜角

表面处理:

- 粉末喷涂
- 聚酯油漆喷涂
- 氟碳喷涂
- 滚涂 (辊涂)
- 热转印

颜色范围:


- 标准颜色为白色, 黑色, 灰色
- 可做木纹或大理石纹颜色
- 可按要求做任何RAL颜色 (潘通色卡)
- 可定制颜色

应用场合:

地铁站, 会展中心, 写字楼, 等等。

Installation:

安装图:

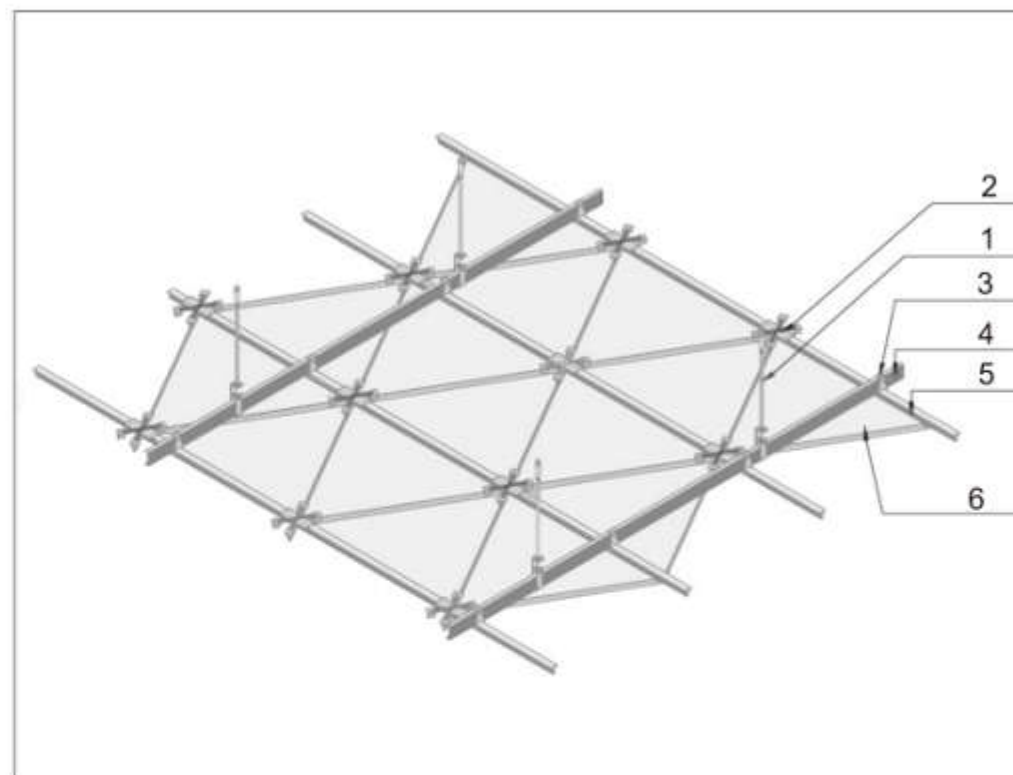


Triangular clip-in Ceiling System

三角形扣板天花吊顶系统

1. Thread rod
2. Splicer
3. Hanger for spring tee
4. 38# main channel
5. Spring tee
6. Triangular clip-in ceiling

1. 螺杆
2. 接件
3. 三角龙骨吊件
4. 38#轻钢龙骨
5. 三角龙骨
6. 三角形扣板天花

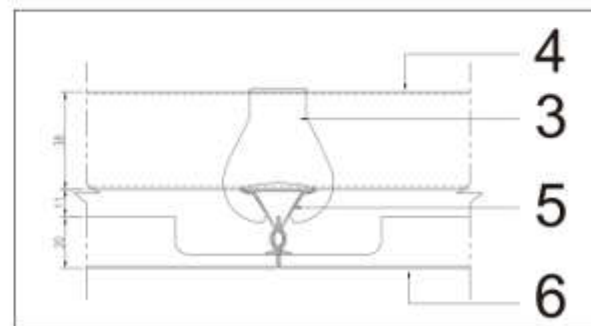

Section Details:

节点图



Hexagonal clip-in Ceiling

六边形扣板天花吊顶

Key Features:

- Material: aluminum alloy.
- Size: 404x404x404x404x404x404mm as standard (Customized size is available.).
- Height: 20mm
- Thickness: 0.7~1.1mm
- Bevelled edge and square edge design.

Surface finish:

- Powder coating
- PE coating
- PVDF coating
- Pre-painted
- Transfer printing

Color Range:

- The standard color is white, black, grey, etc.
- Wood color and marble color is available.
- Any of the RAL color is available as required.
- Customized colors available.

Application:

Metro station, Convention center, Shopping mall, etc.

特征:

- 材料: 铝
- 尺寸: 标准尺寸为404x404x404x404x404x404mm. (可定制尺寸)
- 高度: 20mm
- 厚度: 0.7~1.1mm
- 斜角或直角设计

表面处理:


- 粉末喷涂
- 聚酯油漆喷涂
- 氟碳喷涂
- 滚涂 (辊涂)
- 热转印

颜色范围:

- 标准颜色为白色, 黑色, 灰色
- 可做木纹或大理石纹颜色
- 可按要求做任何RAL颜色 (潘通色卡)
- 可定制颜色


应用场合:

地铁站, 会展中心, 商场, 等等。

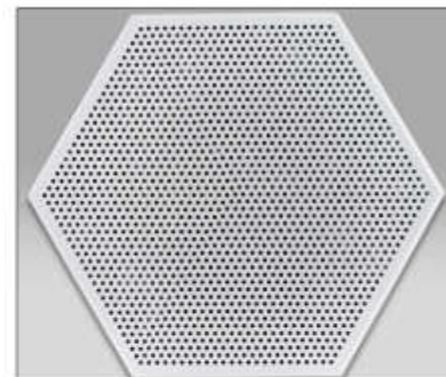

Installation:

安装图:

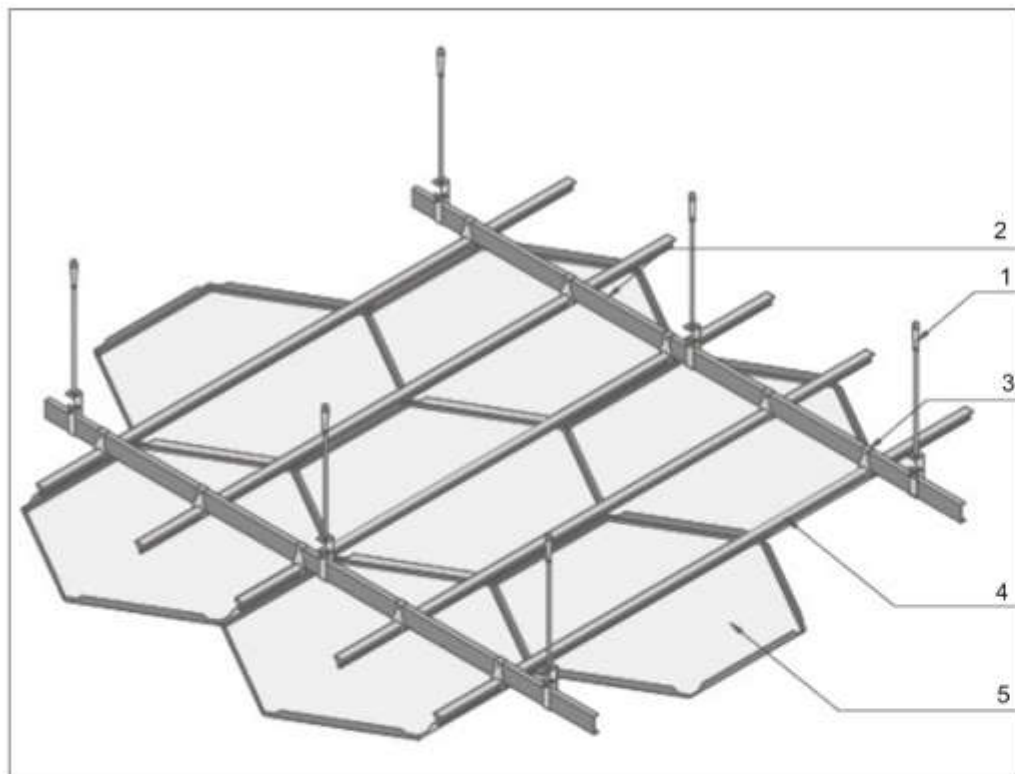


Hexagonal clip-in Ceiling System

六边形扣板天花吊顶系统

1. Thread rod
2. 38# main channel
3. Hanger for spring tee
4. Spring tee
5. Hexagonal clip-in ceiling

- 1、螺杆
- 2、38#轻钢龙骨
- 3、三角龙骨吊件
- 4、三角龙骨
- 5、六边形扣板

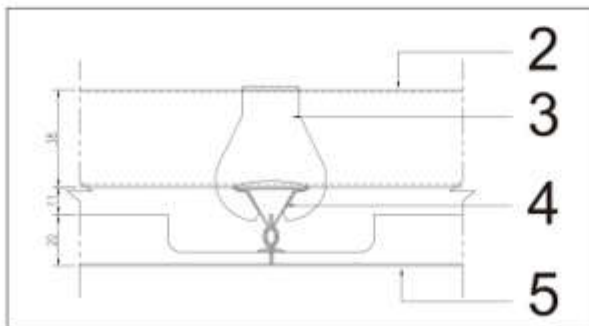

Section Details:

节点图



Perforated Panel

冲孔板



Key Features:

- Material: aluminum alloy & galvanized steel.
- Panel Width: Maximum 1600mm
- Panel Length: Maximum 6000mm (Customized size is available.)
- Thickness: 0.4-4.0mm

Surface finish:

- Powder coating
- PE coating
- PVDF coating
- Transfer printing

Color Range:

- The standard color is white, black, grey, etc.
- Wood color and marble color is available.
- Any of the RAL color is available as required.
- Customized colors available.

Application:

Airport, Metro station, Music hall, etc.

特征:

- 材料: 铝或镀锌钢
- 板宽: 最大1600mm
- 板长: 最大6000mm (可定制尺寸)
- 厚度: 0.4-4.0mm

表面处理:


- 粉末喷涂
- 聚酯油漆喷涂
- 氟碳喷涂
- 热转印

颜色范围:

- 标准颜色为白色, 黑色, 灰色
- 可做木纹或大理石纹颜色
- 可按要求做任何RAL颜色 (潘通色卡)
- 可定制颜色

应用场合:

机场, 地铁站, 音乐厅, 等等。

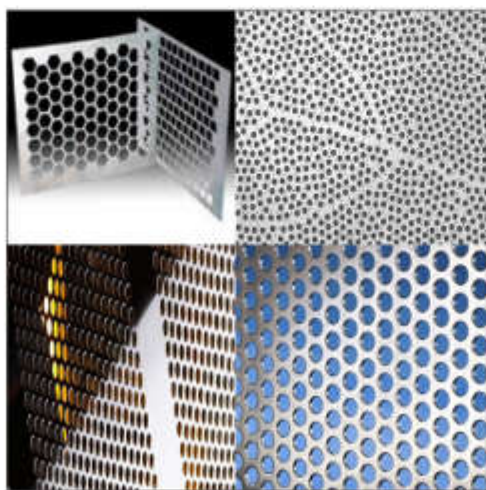

Perforated Patterns:


冲孔款式:

冲孔板的排列样式

Arrangement Style of Punching


圆孔60° 梅花排列

60° Degree & Round Quincunx




圆孔45° 梅花排列

45° Degree & Round Quincunx




圆孔90° 直角排列

90° Degree & Round Square




方孔梅花排列

Square & Quincunx




方孔直角排列

Square




长孔梅花排列

Slot & Quincunx










长列直角排列

Slot & Square



Sample pictures:

样品图片:



Customized designs are available as request.



Solid Cladding Panel/Facade

铝单板/墙面板



Key Features:

- Material: aluminum alloy.
- Panel Width: Maximum 1600mm
- Panel Length: Maximum 5000mm (Customized size is available.)
- Thickness: 1.5-4.0mm
- Perforated or non-perforated for choice.

Surface finish:

- Powder coating
- PE coating
- PVDF coating
- Transfer printing

Color Range:

- The standard color is white, black, grey, etc.
- Wood color and marble color is available.
- Any of the RAL color is available as required.
- Customized colors available.

Application:

Metro station, Commercial building, Shopping mall, etc.

特征:

- 材料: 铝
- 板宽: 最大1600mm
- 板长: 最大5000mm (可定制尺寸)
- 厚度: 1.5-4.0mm
- 冲孔或不冲孔选择

表面处理:

- 粉末喷涂
- 聚酯油漆喷涂
- 氟碳喷涂
- 热转印

颜色范围:

- 标准颜色为白色, 黑色, 灰色
- 可做木纹或大理石纹颜色
- 可按要求做任何RAL颜色 (潘通色卡)
- 可定制颜色



应用场合:



地铁站, 商业大楼, 商场, 等等。





Installation:

安装图:

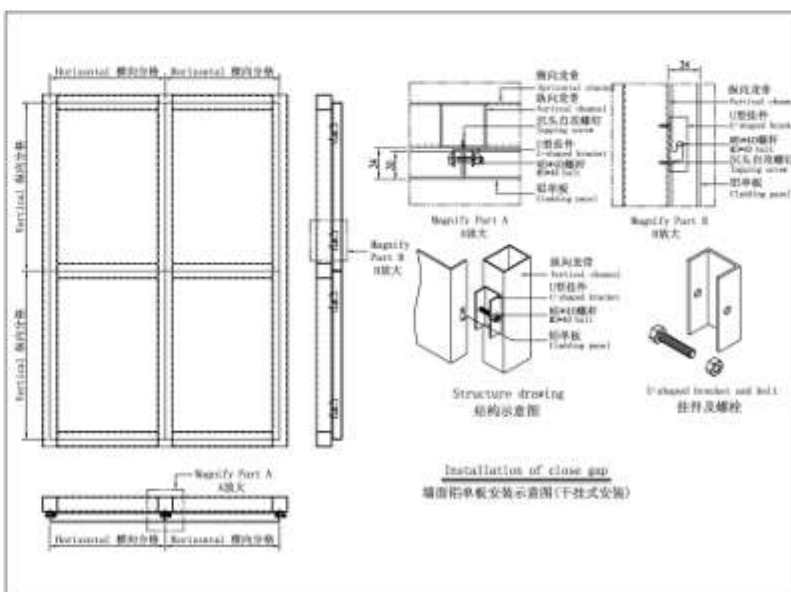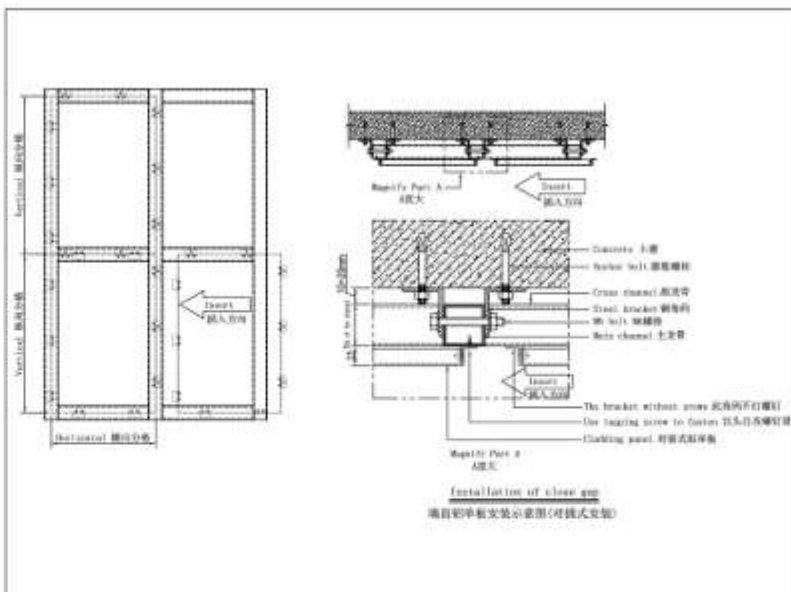

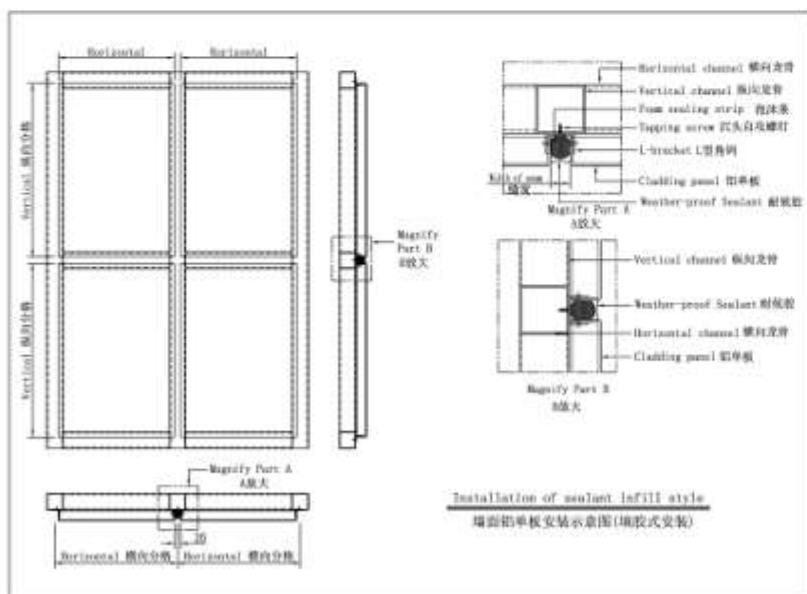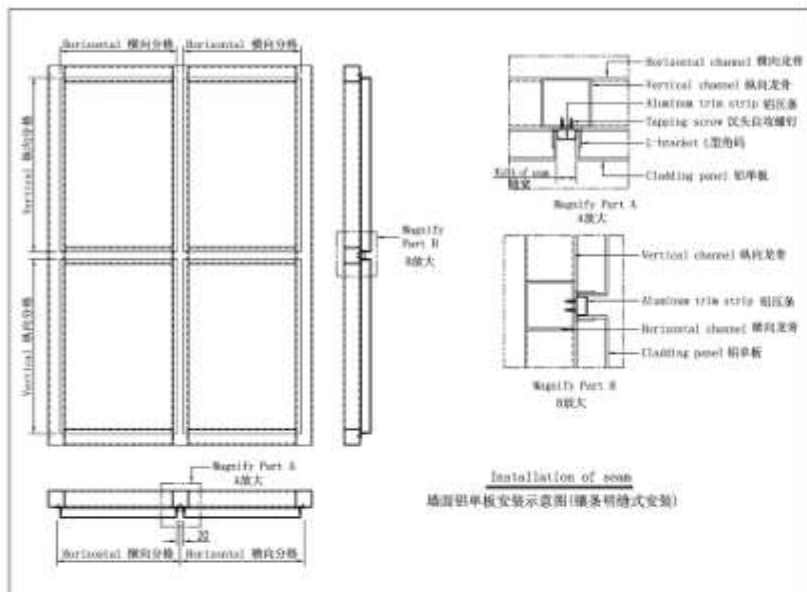

Installation of Column: 包柱板安装图:

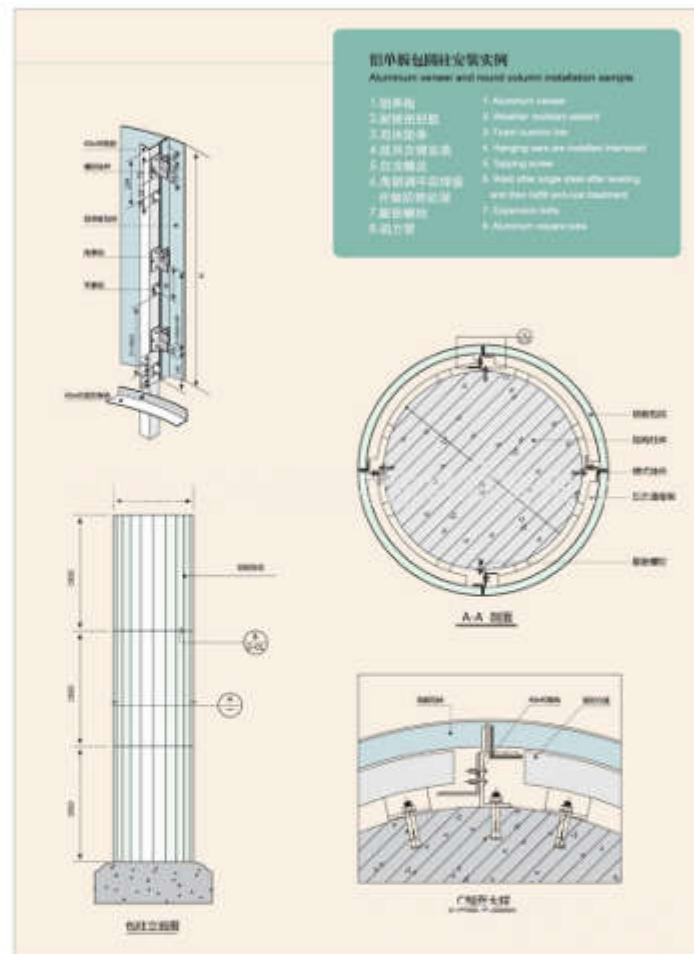



Aluminum Honeycomb Panel

铝蜂窝板



Key Features:

- Material: 3003 aluminum alloy.
- Panel Width: Maximum 1500mm
- Panel Length: Maximum 5000mm
- Panel Height: 8/10/12/15/20/25/30mm
(Customized size is available.)
- Thickness of front(surface skin) aluminum alloy foil:0.7~1.2mm
- Thickness of bottom(rear skin) aluminum alloy foil:0.5~1.0mm
- Perforated or non-perforated for choice.

Surface finish:

- Metallic
- Anodize
- Pre-painted PVDF
- Pre-painted PE
- Pre-painted wood grain/marble

Color Range:

- The standard color is white,black,gray,etc.
- Wood color and marble color is available.
- Any of the RAL color is available as required.
- Customized colors available.

Application:

Metro station, Museum, Government building, etc.

特征:

- 材料: 3003铝合金
- 板宽度: 最大1500mm
- 板长度: 最大5000mm
- 板高度: 8/10/12/15/20/25/30mm
(可定制尺寸)
- 面板厚度: 0.7~1.2mm
- 背板厚度: 0.5~1.0mm
- 可选择冲孔或不冲孔

表面处理:


- 金属效果表面处理
- 氧化处理
- 滚涂氟碳漆
- 滚涂聚酯漆
- 滚涂木纹/大理石纹

颜色范围:

- 标准颜色为白色, 黑色, 灰色
- 可做木纹或大理石纹颜色
- 可按要求做任何RAL颜色 (潘通色卡)
- 可定制颜色


应用场合:

地铁站, 博物馆, 政府大楼, 等等。

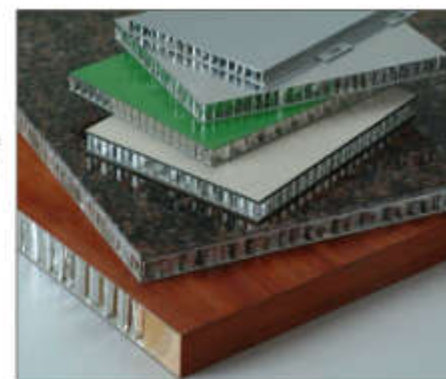

Installation:

安装图:

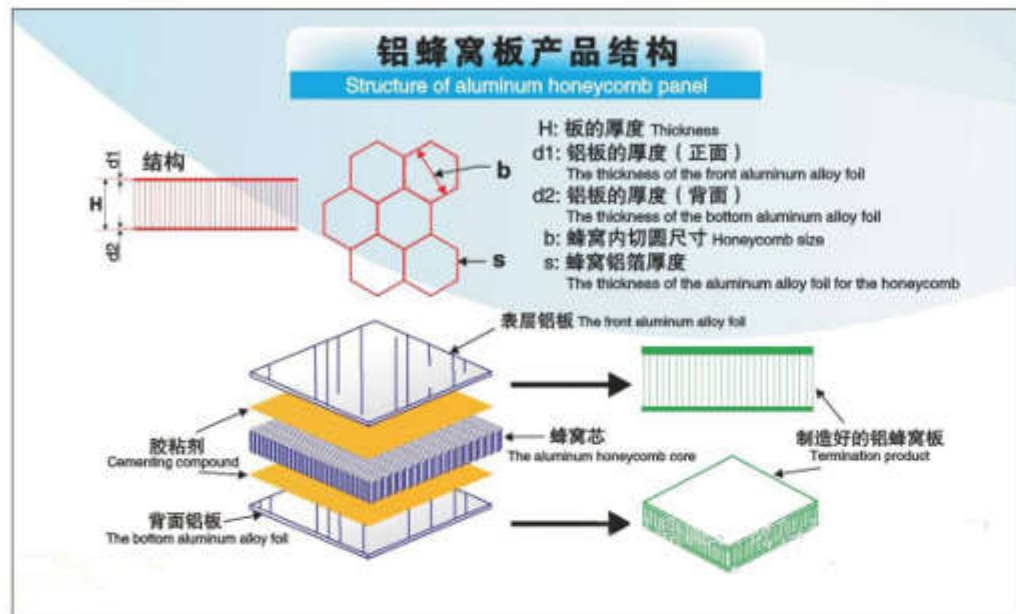

Structure of aluminum honeycomb panel

铝蜂窝板产品结构图


Way of Processing:

加工方式:



Hexagonal aluminum core:
Material: 3003 alu alloy
Thickness: 0.02-0.05mm

六角形铝蜂窝芯:
材料: 3003铝合金
厚度: 0.02-0.05mm

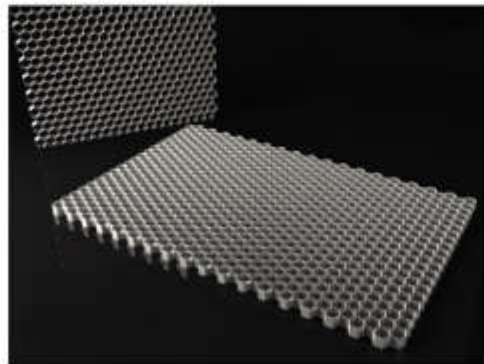

Hexagonal Aluminum core

六角形铝蜂窝芯



Aluminum Corrugated Panel

铝瓦楞板



Key Features:

- Material: 3003 aluminum alloy.
- Panel Width: Maximum 1500mm
- Panel Length: Maximum 5000mm
- Panel Height: 4/5/6/8/10/12mm (Customized size is available.)
- Thickness of front (surface skin) aluminum alloy foil: 0.7~1.2mm
- Thickness of bottom (rear skin) aluminum alloy foil: 0.5~1.0mm
- Perforated or non-perforated for choice.

Surface finish:

- Metallic
- Anodize
- Pre-painted PVDF
- Pre-painted PE
- Pre-painted wood grain/marble

Color Range:

- The standard color is white, black, grey, etc.
- Wood color and marble color is available.
- Any of the RAL color is available as required.
- Customized colors available.

Application:

Metro station, Museum, Government building, etc.

特征:

- 材料: 3003铝合金
- 板宽度: 最大1500mm
- 板长度: 最大5000mm
- 板高度: 4/5/6/8/10/12mm (可定制尺寸)
- 面板厚度: 0.7~1.2mm
- 背板厚度: 0.5~1.0mm
- 可选择冲孔或不冲孔

表面处理:



- 金属效果表面处理
- 氧化处理
- 滚涂氟碳漆
- 滚涂聚酯漆
- 滚涂木纹/大理石纹

颜色范围:

- 标准颜色为白色, 黑色, 灰色
- 可做木纹或大理石纹颜色
- 可按客户要求任何RAL颜色 (潘通色卡)
- 可定制颜色


应用场合:

地铁站, 博物馆, 政府大楼, 等等。

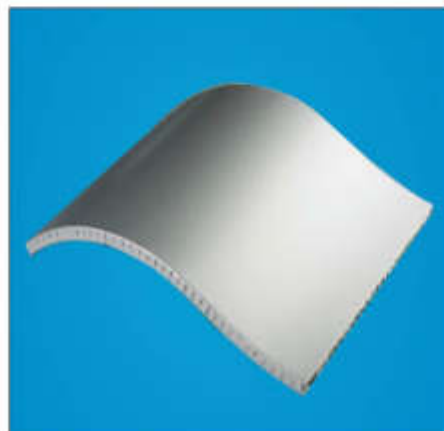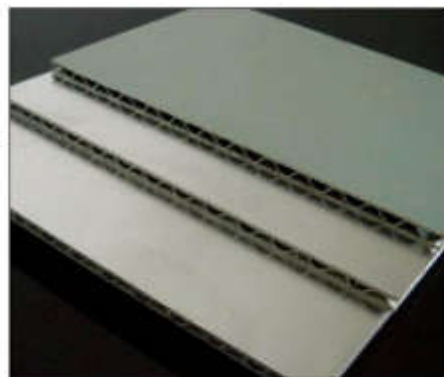

Installation:

安装图:

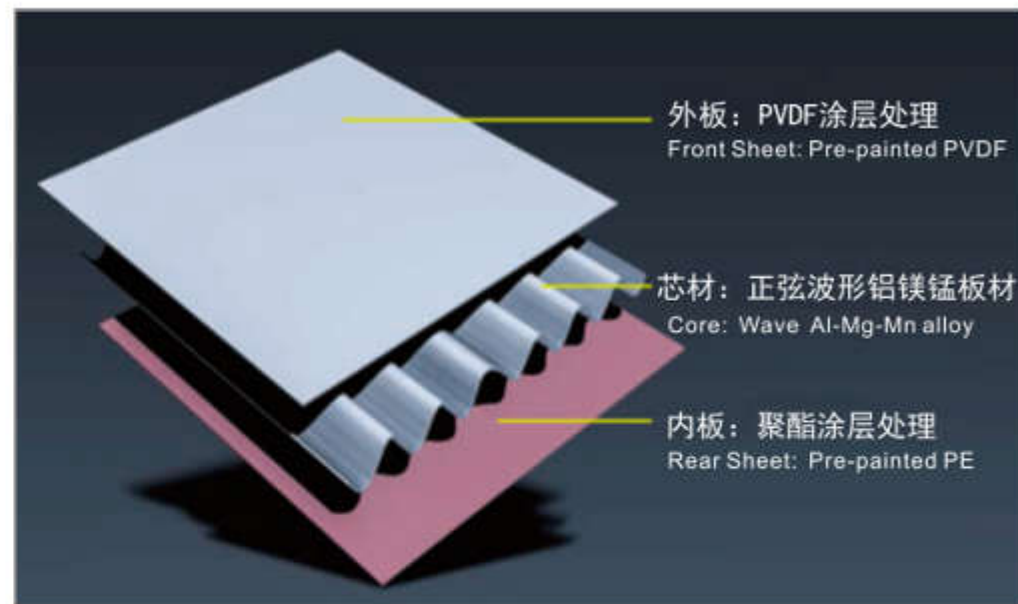


Structure of aluminum corrugated panel

铝瓦楞板产品结构图

Wave aluminum core:
Material: 3003 alu alloy
Thickness: 0.2/0.25/0.3mm

波浪型铝蜂窝芯:
材料: 3003铝合金
厚度: 0.2/0.25/0.3mm

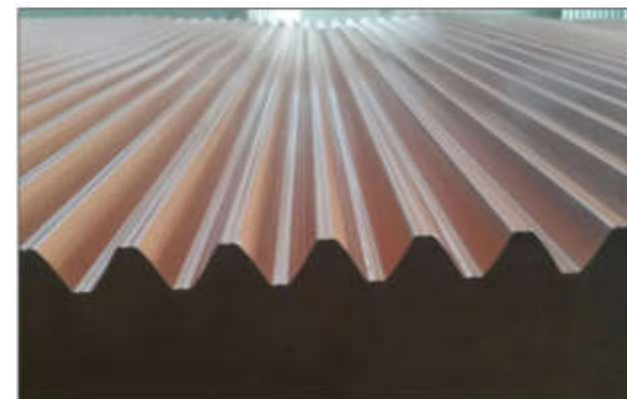

Wave Aluminum core

波浪型铝瓦楞芯



Customized Ceiling Design

定制天花吊顶设计



Customized Circular Ceiling:

定制圆形天花吊顶:




Customized Curve Ceiling:


定制弧形天花吊顶:



Customized Wave Ceiling:
定制波浪形天花吊顶:

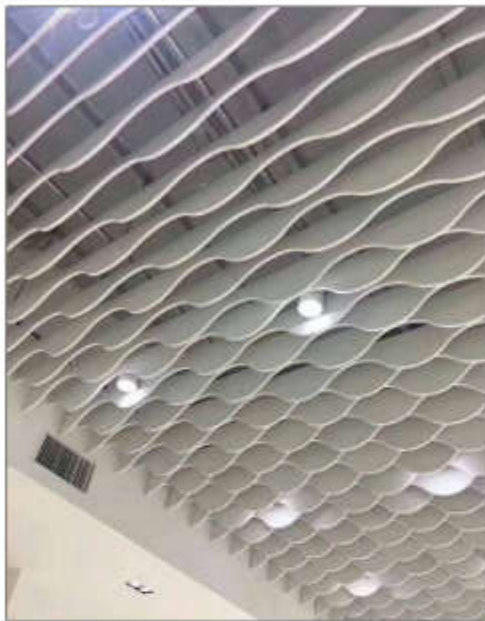


Customized Non-Standard Ceiling:
定制不规则天花吊顶:

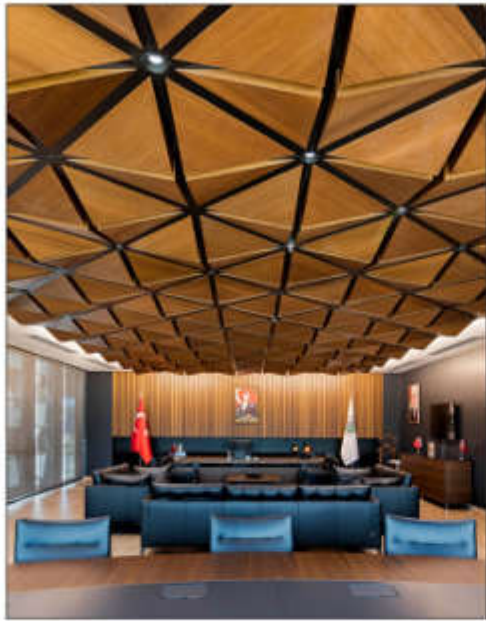


Customized Suspended Ceiling:
定制悬吊天花吊顶:



Customized CNC Cut-out Panel:
定制CNC切割镂空板:

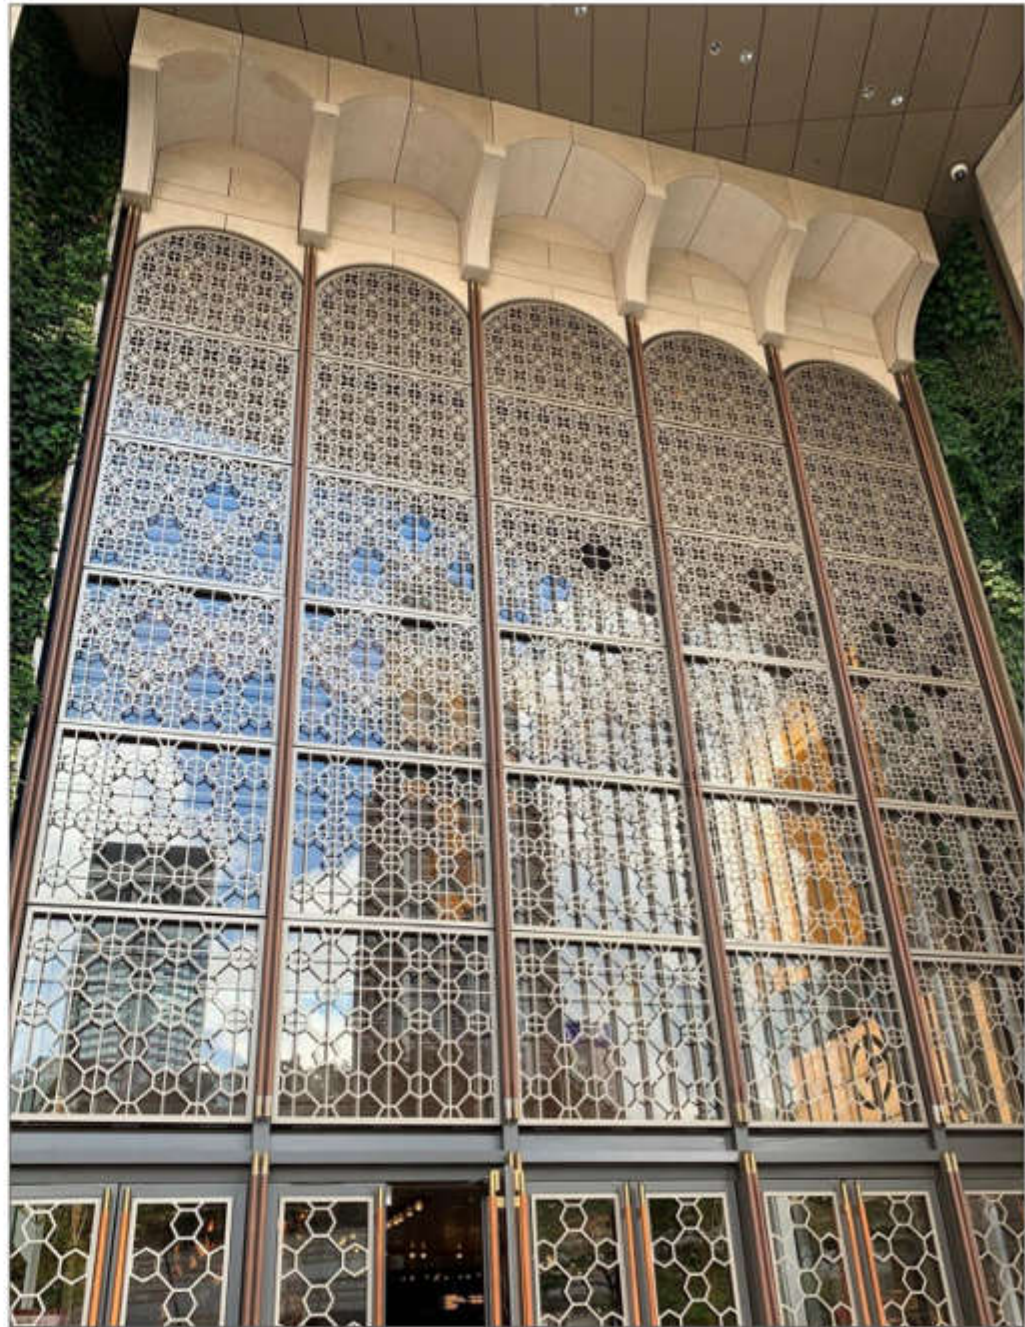

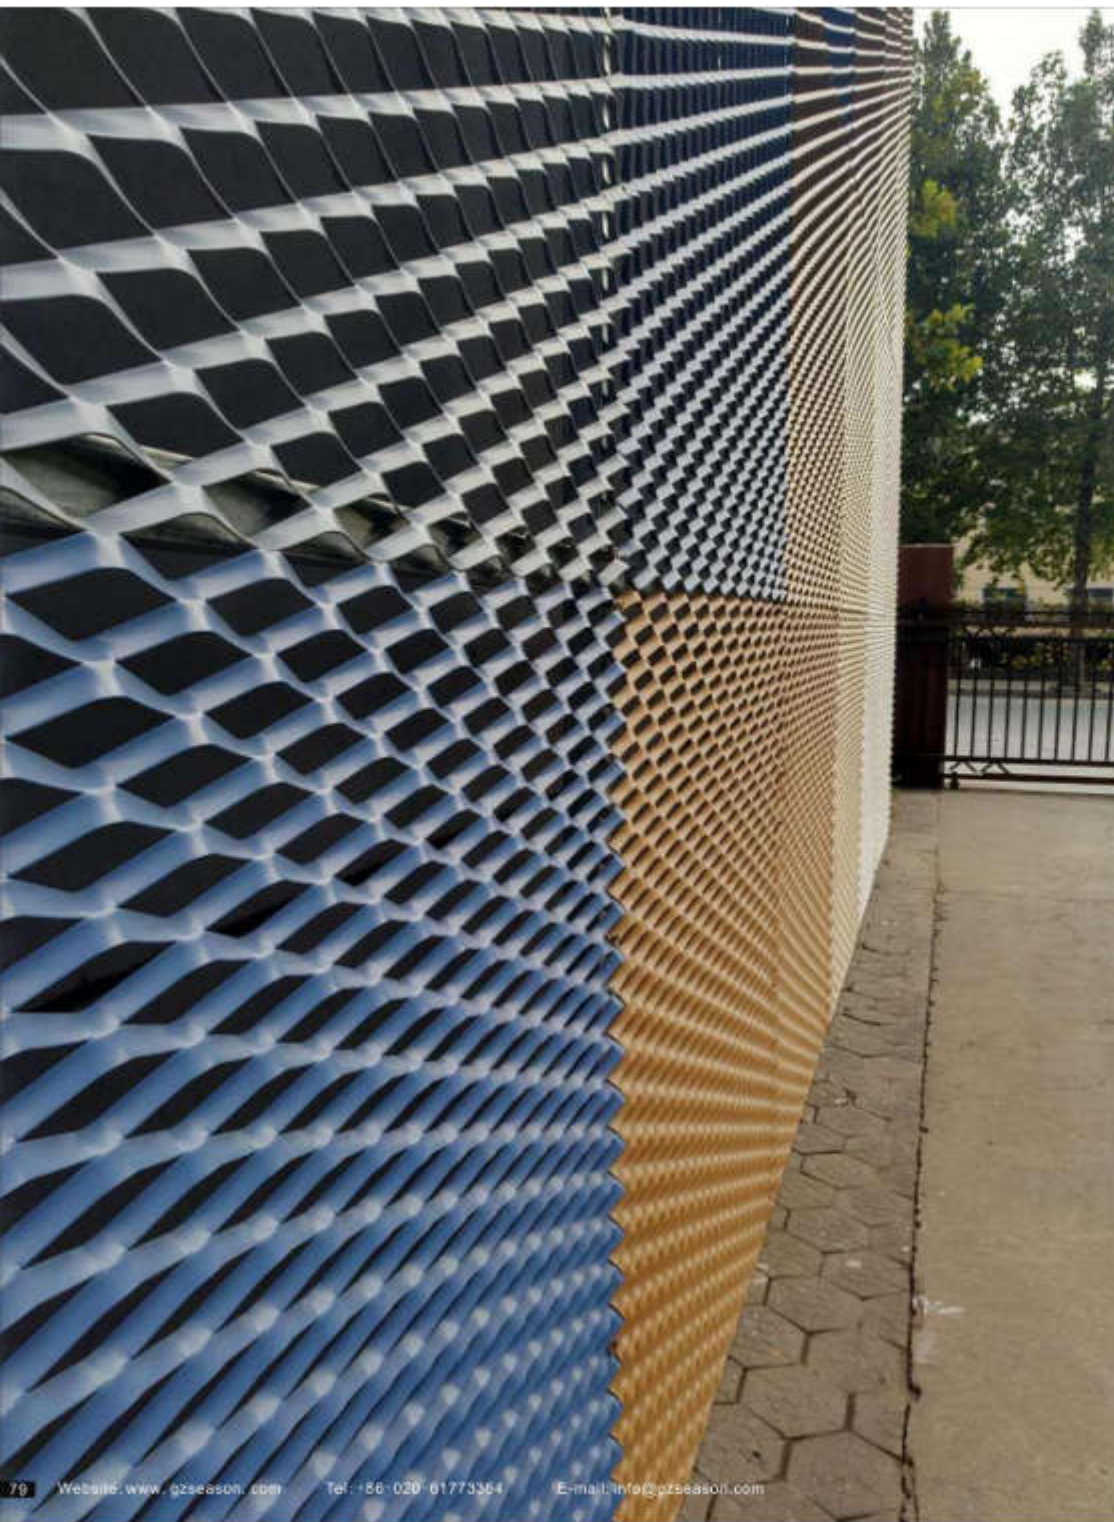

Metal Expanded Mesh Panel

金属拉伸板网



Key Features:

- Material: aluminum alloy & galvanized steel.
- Standard Size: 1220x2440mm as standard (Customized size is available.).
- Thickness: 0.5~8mm
- Different kinds of the mesh styles for choice.

Surface finish:

- Powder coating
- PE coating
- PVDF coating
- Anodized

Color Range:

- The standard color is white, black, grey, etc.
- Any of the RAL color is available as required.
- Customized colors available.

Application:

Exterior and Interior use as per request.

特征:

- 材料: 铝或镀锌钢
- 标准尺寸: 1220x2440mm.
(可定制尺寸)
- 厚度: 0.5~8mm
- 不同种类的网格款式可选择

表面处理:


- 粉末喷涂
- 聚酯油漆喷涂
- 氟碳喷涂
- 阳极氧化

颜色范围:

- 标准颜色为白色, 黑色, 灰色
- 可按要求做任何RAL颜色 (潘通色卡)
- 可定制颜色

应用场合:


根据要求可作室外和室内使用。

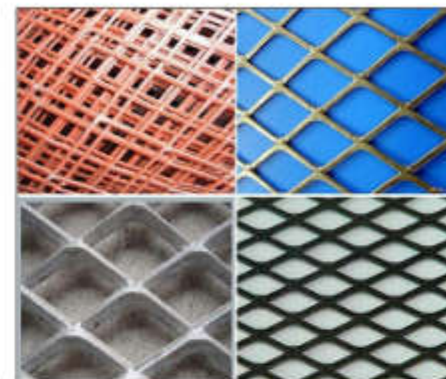

Technical Specification:
技术参数:

Specification				width(mm)	length(mm)	weight(kg/m ²)
thickness (mm)	SWD(mm)	LWD (mm)	strand(mm)			
0.5	2.5	4.5	0.5	0.5	1	1.8
0.5	10	25	0.5	0.6	2	0.73
0.6	10	25	1	0.6	2	1
0.8	10	25	1	0.6	2	1.25
1	10	25	1.1	0.6	2	1.77
1	15	40	1.5	2	4	1.85
1.2	10	25	1.1	2	4	2.21
1.2	15	40	1.5	2	4	2.3
1.5	15	40	1.5	1.8	4	2.77
1.5	23	60	2.6	2	3.6	2.77
2	18	50	2.1	2	4	3.69
2	22	60	2.6	2	4	3.69
3	40	80	3.8	2	4	5
4	50	100	4	2	2	11.15
4	60	120	4	2	7.5	4
4	80	180	4	2	10	3
4	100	200	4	2	12	2.5
4.5	50	100	5	2	2.7	11.15
5	50	100	5	1.4	2.6	12.39
5	75	150	5	2	10	3
6	50	100	6	2	2.5	17.35
8	50	100	8	2	2.1	28.26

Customized design is available as per request.
可按设计要求定制。

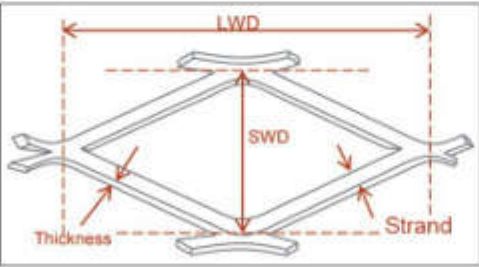

Key Dimensions
关键尺寸图

Installation System:
1. Lay-on with T-bar
2. Welded with hook-on frame
3. Fix on the extruded L-bar with screw

安装系统:
1. 用铁板T型龙骨安装
2. 焊接在勾搭式框架上
3. 用螺丝固定在L型型材上



Air Diffuser

散流器/出风口



曦信装饰
Season Decoration



Key Features:

- Material: aluminum alloy.
- Style: Round ceiling diffuser
Square ceiling diffuser
Linear bar grille diffuser
- A lot of different sizes for choice.

Surface finish:

- Powder coating
- PE coating
- PVDF coating
- Anodized

Color Range:

- The standard color is RAL9016 or RAL9010 white.
- Anodized finish is available.
- Any of the RAL color is available as required.
- Customized colors available.

Application:

Office, Meeting room, Hospital, Library, etc.

特征:

- 材料: 铝
- 款式: 方形天花散流器
圆形天花散流器
线型天花散流器
- 有不同尺寸可供选择

表面处理:

- 粉末喷涂
- 聚酯油漆喷涂
- 氟碳喷涂
- 阳极氧化

颜色范围:


- 标准颜色为RAL9016或RAL9010白色,
- 可做阳极氧化处理
- 可按客户要求任何RAL颜色(潘通色卡)
- 可定制颜色

应用场合:

办公室, 会议室, 医院, 图书馆, 等等。

Round ceiling diffuser:

圆形天花散流器:



Material: Aluminum
Surface finish: RAL9016 or RAL9010 white powder coating as standard, other colors are required. Anodized finish is available.
Features:
Designed with fixed center core
Back with damper is available
360° air flow diffusion

D	Ø230	Ø250	Ø300	Ø350	Ø380	Ø400	Ø450	Ø500	Ø530	Ø560	Ø600	Ø650	Ø700	Ø750	Ø800	Ø1000
ØB	170	190	240	290	320	340	390	440	470	490	540	590	620	680	700	870
C	78	98	148	198	228	248	298	348	378	398	448	498	548	598	648	898
H	65	65	65	65	65	65	65	65	65	65	65	65	65	65	135	185

Linear Bar Grille with 0° angle blades:

带0° 百叶的线型散流器:




Material: Aluminum
Features:
- While spray/anodized/mill finished can be available.
We supply materials and accessories also.

Model	1	2	3	4
D-A	50	50	38	38
H	45	25	38	25

Linear Bar Grille with 15° angle blades:

带15° 百叶的线型散流器:



Material: Aluminum
Features:
- While spray/anodized/mill finished can be available.
We supply materials and accessories also.

Model	1	2	3	4
D-A	50	50	38	38
H	45	25	38	25

Square ceiling diffuser:

方形天花散流器:

For clip-in ceiling system

用于扣板天花吊顶系统



Feature:

- Integrated project design
- Attach fan control switch

Application: Light steel frame

Annex: Radius mask

Face size	Hole size	Neck size
C 350x350mm	C 290x290mm	C Ø60*8"
D 300x300mm	D 240x240mm	D Ø60*8"



Feature:

- Integrated project design
- Attach fan control switch

Application: Light steel frame

Annex: Radius mask

Face size	Hole size	Neck size
C 600x600mm	C 540x540mm	Ø6"8"10"12"14"

For lay-in ceiling system

用于跌级板天花吊顶系统



Feature:

- Integrated project design
- Attach fan control switch

Application: Light steel frame

Annex: Radius mask

Face size	Hole size	Neck size
A 503x503mm	A 420x420mm	Ø6"8"10"12"14"
B 595x595mm	B 420x420mm	Ø6"8"10"12"14"



Access Panel

检修口



Key Features:

- Material: aluminum alloy & galvanized steel.
- Size: 200x200/250x250/300x300/350x350/400x400/450x450/500x500/550x550/600x600mm, etc.
(Customized size is available.)
- Height: 60mm
- Key lock or touch lock design for choice.

Surface finish:

- Powder coating
- PVDF coating
- PE coating
- Transfer printing

Color Range:

- The standard color is RAL9016 or RAL9010 white, etc.
- Wood color and marble color is available.
- Any of the RAL color is available as required.
- Customized colors available.

Application:

Office, Meeting room, Hospital, Library, etc.

特征:

- 材料: 铝或镀锌钢
- 尺寸: 200x200/250x250/300x300/350x350/400x400/450x450/500x500/550x550/600x600mm, 等等。(可定制尺寸)
- 板高度: 60mm
- 钥匙锁开启或磁吸开关开启设计可供选择

表面处理:



- 粉末喷涂
- 氟碳漆喷涂
- 聚酯漆喷涂
- 转印工艺

颜色范围:

- 标准颜色为RAL9016或RAL9010白色
- 可做木纹或大理石纹颜色
- 可按要求做任何RAL颜色(潘通色卡)
- 可定制颜色

应用场合:

办公室, 会议室, 医院, 图书馆, 等等。



AD-H

material: aluminum
standard color: white Ral9016 / 9010
door-hinged design
customized size upon request
key lock or touch lock

材料: 铝合金 标准颜色: 白色
尺寸可以定制

AD-R

material: aluminum
standard color: white Ral9016 / 9010
inner core is totally removable
customized size upon request

材料: 铝合金 标准颜色: 白色
尺寸可以定制

AD-HG

frame: aluminum door: steel
standard color: white Ral9016 / 9010
door-hinged design
customized size upon request

材料: 铝合金、镀锌板 标准颜色: 白色 尺寸可以定制

AD-GC

material: steel
standard color: white Ral9016 / 9010
door-hinged design
customized size upon request

材料: 镀锌板 标准颜色: 白色
尺寸可以定制

AD-GF

material: steel
standard color: white Ral9016 / 9010
door-hinged design
customized size upon request

材料: 镀锌板 标准颜色: 白色
尺寸可以定制



LED Ceiling Light

LED天花灯



Features:

1. Quality famous branded SMD chip, CRI>80/90, high luminous efficiency, stable performance to provide uniform & comfortable light layout.
2. Patented flame design, streamlined structure, delicate finishing, compact and elegant.
3. Mitsubishi LGP, professional point laser design to ensure high lumen, comfortable and natural lighting.
4. High quality isolated constant current driver, Dimming, intelligent control function for options.
5. Luminous decay less than 2% at 6,000 hours (ERP tested and approved), lifespan up to 35,000 hours
6. Serialized products, powers ranging from 12W-80W
7. Suspending, recessed, ceiling mounted for options.
8. 3~5 years warranty



特征:

- 1、国际品牌 SMD 光源, CRI > 80/90, 光效高、光色一致好, 性能稳定, 发光均匀舒适;
- 2、专利技术边框设计, 流线型结构, 表面处理精致, 外观简洁大方;
- 3、日本三菱导光板, 专业网点配光设计, 确保发光面明亮、均匀柔和, 舒适而不刺眼;
- 4、隔离恒流驱动, 质量稳定, 可选配各类调光驱动及智能控制系统, 满足各种使用需求;
- 5、ERP 测试 6000 小时光衰小于 2%, 整灯寿命长达 35000 小时;
- 6、系列化产品, 功率涵盖 12W-80W;
- 7、可选吊链式、嵌入式、吸顶等安装方式, 适合各类需求;
- 8、质保3~5年, 全程使用无忧。



LED Panel Light
LED面板灯



Model 型号	Dimension(mm) 产品尺寸	Power 功率	Luminous 光通量	Packing(mm) 装箱规格
L05201-12	300x300	12W	1020lm	12pcs/CTN 708x346x345
L05202-24	300x600	24W	2040lm	6pcs/CTN 660x346x345
L05203-40	600x600	40W	3400lm	4pcs/CTN 639x212x642
L05204-40	300x1200	40W	3400lm	4pcs/CTN 1245x200x342
L05205-80	600x1200	80W	6800lm	2pcs/CTN 1255x655x90

Features:

1. Quality famous branded LED COB chip, high luminous efficiency, CRI>80/90, stable performance to provide uniform & comfortable light layout.
2. High quality aluminum heat sink to ensure ingenious shape and increase heat dissipation space.
3. Twice precision optical design to make uniform, soft and comfortable light, luxury visual feeling.
4. High quality isolated constant current driver. Dimming, intelligent control function for options.
5. Serialized products, multiple sizes, powers ranging from 3W to 40W.
6. Lifespan up to 35,000 hours, 3-5 years warranty.

特征:

1. 国际进口品牌COB模组, CRI>80/90, 光效高, 性能稳定, 发光均匀舒适;
2. 国标铝材灯体和铝制散热器, 确保灯具良好外观成型及充分的散热;
3. 二次精密配光设计, 光晕自然舒适; 不同发光角度诉求点清晰, 成像均匀;
4. 隔离恒流驱动, 质量稳定; 可选配各类调光驱动及智能控制系统, 满足各种使用需求;
5. 系列化产品, 不同尺寸, 功率涵盖3-40W;
6. 整灯寿命长达35000小时, 质保3-5年。



LED Downlight
LED筒灯



Model 型号	Dimension(mm) 产品尺寸	Cut out(mm) 开孔尺寸	Power 功率	Luminous 光通量	Packing(mm) 装箱规格
L01105-3	Φ70x47	Φ45	3W	150lm	100pcs /CTN 577x364x353
L01101-6	Φ83x68	Φ73	6W	510lm	30pcs /CTN 552x413x208
L01101-8	Φ83x68	Φ73	8W	680lm	30pcs /CTN 552x413x208
L01106-9	Φ90x68	Φ78	9W	720lm	30pcs /CTN 552x413x208
L01106-12	Φ90x88	Φ78	12W	1020lm	30pcs /CTN 552x413x242
L01107-15	Φ110x93	Φ95	15W	1275lm	30pcs /CTN 552x413x242
L01103-20	Φ120x103	Φ105	20W	1700lm	12pcs /CTN 424x339x242
L01104-30	Φ150x103	Φ135	30W	2550lm	12pcs /CTN 370x350x410
L01104-40	Φ150x118	Φ135	40W	3400lm	12pcs /CTN 370x350x410

Features:

1. Quality famous branded LED SMD chip, high luminous efficiency, CRI>80/90, with uniform & comfortable light layout.
2. High quality profile, simple & exquisite design.
3. Optical lens or acrylic transparent solutions, high luminous efficiency, with good anti-glare effect.
4. Pendant or ceiling designs, easy for installing.
5. Can be directly spliced or combined in group, fit for different applications and specialised demands.
6. Can be dimmable or smart controlled, available for multiple applications.
7. Lifespan up to 35000hours, 3-5 years warranty.

特征:

1. 国际品牌SMD光源, CRI>80/90, 光效高, 一致性好;
2. 国标铝材灯体, 外形设计简洁、精致;
3. 透镜配光和亚克力透光选择, 出光效率高, 防眩效果好;
4. 可选吊线、吸顶等方式, 安装简单易操作;
5. 可拼接, 可组合, 可满足不同使用需求和个性化需求;
6. 可选配调光及智能控制, 让您的应用更丰富;
7. 整灯寿命长达35000小时, 质保3-5年。

Reflector Colour
选择颜色

1. 选择颜色 1 module

Item No	Power	Flux	L x W x H
L01112-15	15W	1275lm	580 x 43 x 66

1. 选择颜色 1 module

Item No	Power	Flux	L x W x H
L01113-20	20W	1700lm	890 x 43 x 66

1. 选择颜色 1 module

Item No	Power	Flux	L x W x H
L01114-30	30W	2550lm	1180 x 43 x 66




Model 型号	Dimension(mm) 产品尺寸	Power 功率	Luminous 光通量	Packing(mm) 装箱规格
L01112-15	580x43x66	15W	1275lm	8pcs /CTN 620x240x170
L01113-20	890x43x66	20W	1700lm	8pcs /CTN 920x240x170
L01114-30	1180x43x66	30W	2550lm	8pcs /CTN 1260x240x170
L01115-45	1480x43x66	45W	3825lm	8pcs /CTN 1560x240x170



LED Linear Light
LED线型灯



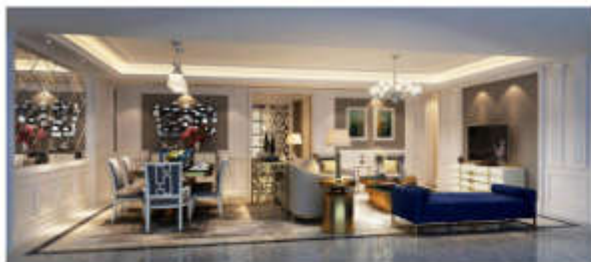


LED Strip Light
LED灯带



Model 型号	Power 功率	LED Type 光源类型	LED QTY. 数量	Driver 驱动	Specifications 规格
L09203-36	7.2W/M	SMD 5050	30pcs/m	External driver 外置恒流驱动 Dimmable 可调光	5m/ 卷
L09204-72	14.4W/M	SMD 5050	60pcs/m	External driver 外置恒流驱动 Dimmable 可调光	5m/ 卷




Model 型号	Power 功率	LED Type 光源类型	LED QTY. 数量	Driver 驱动	Specifications 规格
L09201-24	4.8W/M	SMD 3528	60pcs/m	External driver 外置恒压驱动 Dimmable 可调光	5m/ 卷
L09202-48	9.6W/M	SMD 3528	120pcs/m	External driver 外置恒压驱动 Dimmable 可调光	5m/ 卷

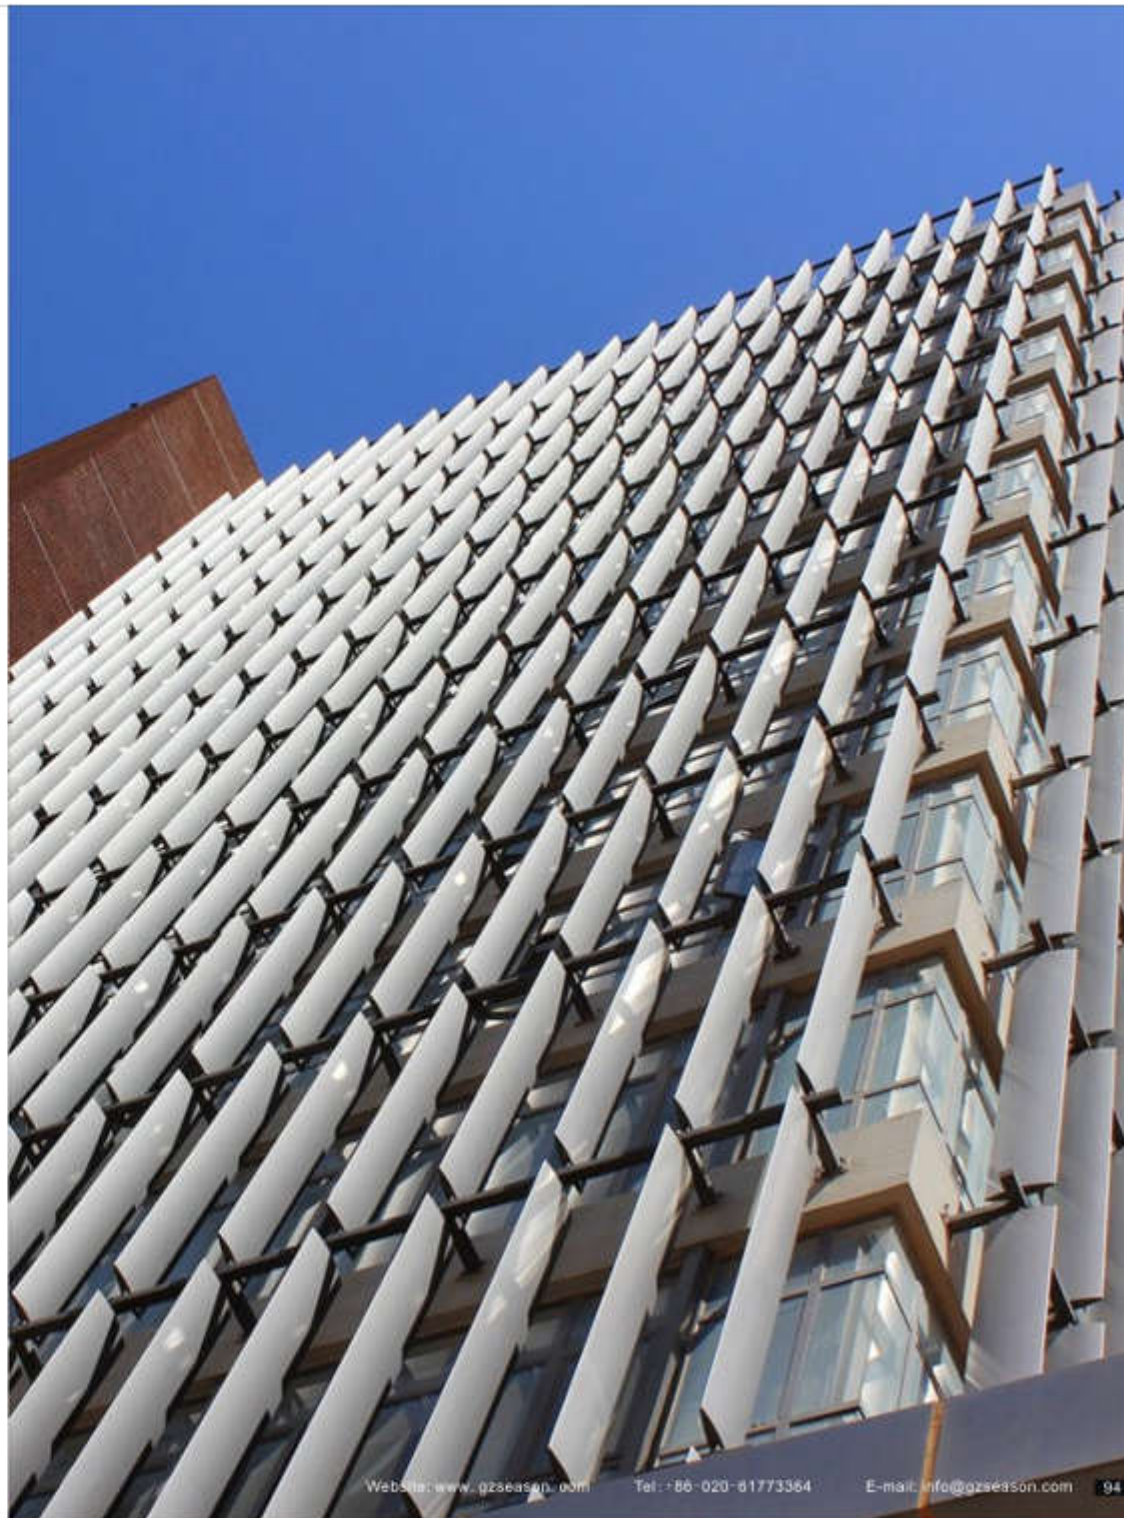

Sun Louver

遮阳百叶

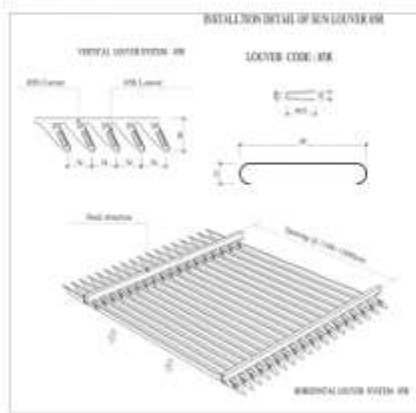

Key Features:

- Material: aluminum alloy.
- Size: 85W*15H
- Length: 3000mm as standard, up to 6000mm
- Thickness: 0.4-0.7mm.

Surface finish:

- Powder coating
- PE coating
- PVDF coating
- Anodized

Color Range:

- The standard color is RAL9016 or RAL9010 white.
- Anodized finish is available.
- Any of the RAL color is available as required.
- Customized colors available.

特征:


- 材料: 铝
- 尺寸: 85W*15H
- 长度: 标准长度3000mm, 可做到6000mm
- 厚度: 0.4-0.7mm

表面处理:

- 粉末喷涂
- 聚酯油漆喷涂
- 氟碳喷涂
- 阳极氧化

颜色范围:

- 标准颜色为RAL9016或RAL9010白色,
- 可做阳极氧化处理
- 可按要求做任何RAL颜色(潘通色卡)
- 可定制颜色

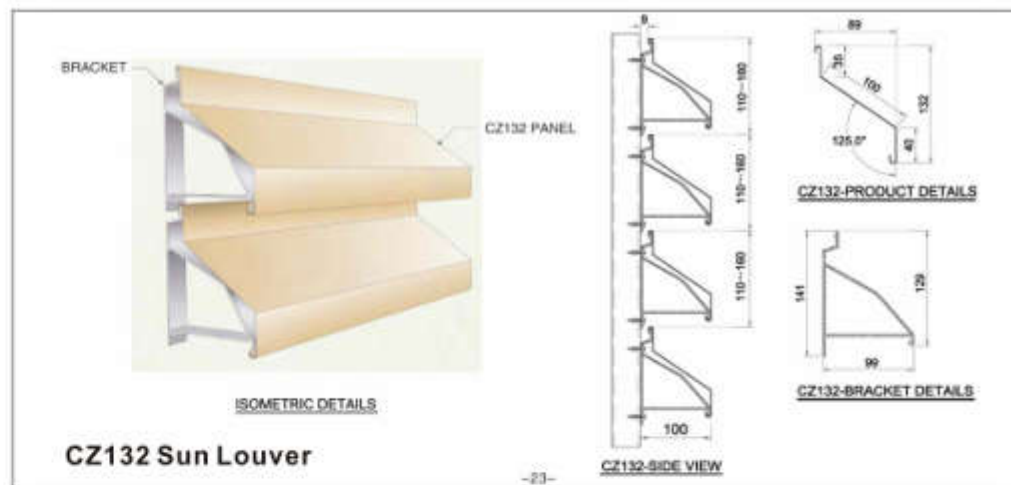

CZ132 Sun Louver



Key Features:

- Material: aluminum alloy.
- Size: 89W*132H*0.7mm Thk
- Length: 2900mm as standard, up to 4000mm
- Bracket: 2.0mm.

Surface finish:

- Powder coating
- PE coating
- PVDF coating
- Anodized

Color Range:

- The standard color is RAL9016 or RAL9010 white.
- Anodized finish is available.
- Any of the RAL color is available as required.
- Customized colors available.

特征:


- 材料: 铝
- 尺寸: 89W*132H*0.7mm厚
- 长度: 标准长度2900mm, 可做到4000mm
- 固定件: 2.0mm

表面处理:

- 粉末喷涂
- 聚酯油漆喷涂
- 氟碳喷涂
- 阳极氧化

颜色范围:

- 标准颜色为RAL9016或RAL9010白色,
- 可做阳极氧化处理
- 可按要求做任何RAL颜色(潘通色卡)
- 可定制颜色

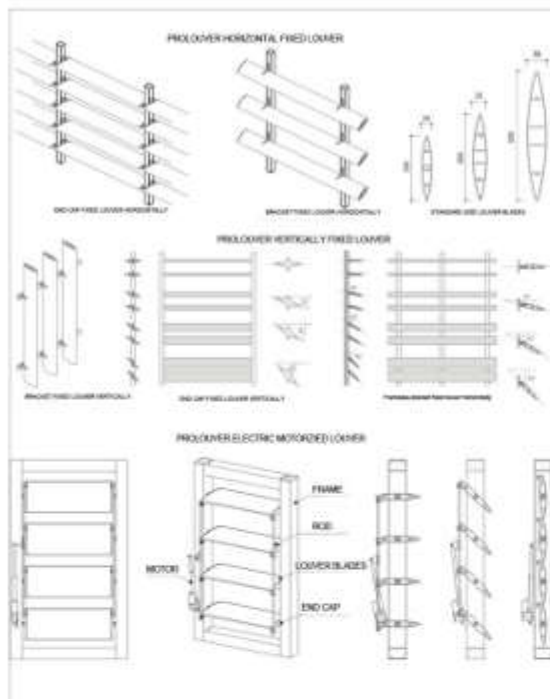

Aerofoil Louver



Key Features:

- Material: 6063T6 aluminum alloy.
- Size: 100*15*1.2mm, 120*18*1.3mm, 150*24*1.5mm, 200*35*1.5mm, 250*40*2.0mm, 300*50*2.5mm, 300*45*1.8mm, 350*60*2.5mm, 400*60*3.0mm, 450*60*3.0mm.
- Length: 2000~4500mm

Surface finish:

- Powder coating
- PE coating
- PVDF coating
- Anodized

Color Range:

- The standard color is RAL9016 or RAL9010 white.
- Anodized finish is available.
- Any of the RAL color is available as required.
- Customized colors available.

特征:


- 材料: 6063T6 铝合金
- 尺寸: 100*15*1.2mm, 120*18*1.3mm, 150*24*1.5mm, 200*35*1.5mm, 250*40*2.0mm, 300*50*2.5mm, 300*45*1.8mm, 350*60*2.5mm, 400*60*3.0mm, 450*60*3.0mm.
- 长度: 2000~4500mm

表面处理:

- 粉末喷涂
- 聚酯油漆喷涂
- 氟碳喷涂
- 阳极氧化

颜色范围:

- 标准颜色为RAL9016或RAL9010白色,
- 可做阳极氧化处理
- 可按要求做任何RAL颜色 (潘通色卡)
- 可定制颜色

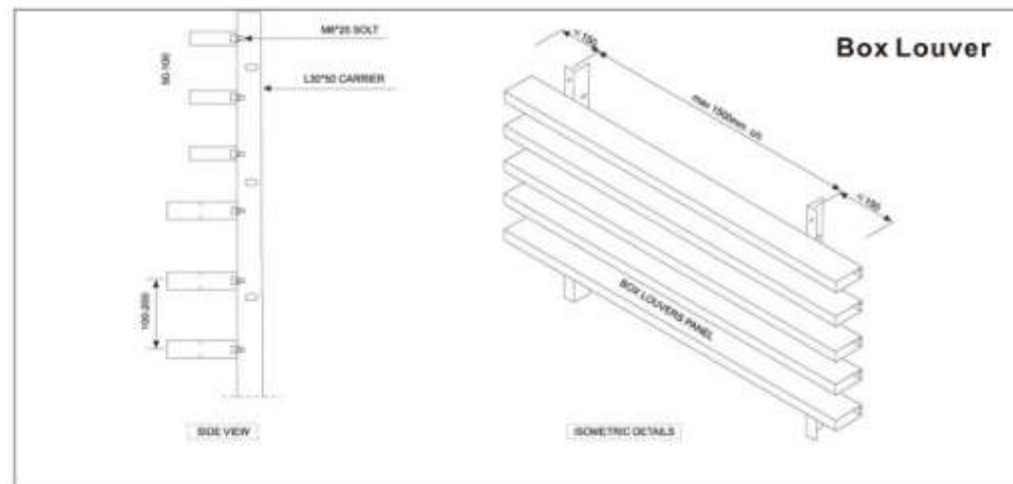

Key Features:

- Material: aluminum alloy.
- Size: 25W*50H*0.8mm, 25W*100H*1.0mm, 30W*120H*1.2mm, 40W*200H*2.0mm, 50W*100H*1.0mm, 50W*150H*1.5mm, 50W*200H*2.0mm, customized size is available.
- Length: 2900mm as standard, up to 6000mm
- Match with GMS L-carrier.

Surface finish:

- Powder coating
- PE coating
- PVDF coating
- Anodized

Color Range:

- The standard color is RAL9016 or RAL9010 white.
- Anodized finish is available.
- Any of the RAL color is available as required.
- Customized colors available.

特征:

- 材料: 铝合金
- 尺寸: 25W*50H*0.8mm, 25W*100H*1.0mm, 30W*120H*1.2mm, 40W*200H*2.0mm, 50W*100H*1.0mm, 50W*150H*1.5mm, 50W*200H*2.0mm, 可定制尺寸。
- 长度: 标准长度2900mm, 可做到6000mm
- 配有镀锌钢L型龙骨。

表面处理:

- 粉末喷涂
- 聚酯油漆喷涂
- 氟碳喷涂
- 阳极氧化

颜色范围:

- 标准颜色为RAL9016或RAL9010白色,
- 可做阳极氧化处理
- 可按要求做任何RAL颜色 (潘通色卡)
- 可定制颜色



Fiberglass Panel

玻纤板




Technical data/产品参数

MAIN MATERIAL/基材	Nonreflexion compounded high density fiberglass wool 不反光高密度玻纤棉
FACE/表面	Special painted laminated with decorative fiberglass tissue 经特殊工艺处理的装饰纤维毡
DESIGN/颜色	White spray/white paint/black spray/colorful as demanded 白色平喷/白色漆/黑色平喷/彩色, 可根据客户要求制作
FIRE-RESISTANT/防火性	CLASS A tested by SGS (EN13501-1:2007+A1:2009) CLASS A tested by national authoritative departments (GB 8624-2012) A级, 经SGS检测 (EN13501-1:2007+A1:2009) A级, 国家权威部门检测 (GB 8624-2012)
HRC/硬度性	0.8-0.9 tested by SGS/EN50354:2003/EN50354:1997 0.8-1.0 tested by national authoritative departments (GB/T20247-2006/ISO15420:2003) 0.8-0.9经SGS检测/EN50354:2003/EN50354:1997 0.8-1.0 国家权威部门检测 (GB/T20247-2006/ISO15420:2003)
THERMAL-RESISTANT/隔热	≤0.4 m ² ·K/w
HUMIDITY/防潮/下陷性	Dimensionally stable with RH up to 95% at 40°C. No sagging, warping or delaminating 在室内温度40°C以下相对湿度95%以下, 尺寸稳定
MOISTURE RATE/含水率	≤1%
ENVIRONMENTAL IMPACT/环保性	Ties and packings are fully recyclable 成品包装均可回收再利用
SAFETY/安全	Limit of radionuclides in building materials Specific activity of 226Ra, 232Th, 40K ≤ 1.3 放射性核素限量 钍-232活度: ≤1.3 钾-40活度: ≤1.3
CERTIFICATE/品质保证	ISO9000:2008, CMAA
NORMAL SIZE/常规尺寸	600x600/600x1200mm, other size to order/尺寸可定制 Width ≤ 1200mm, Length ≤ 2700mm 厚度 ≤ 120mm, 长度 ≤ 2700mm
NORMAL DENSITY/常规密度	130kg/m ³ (special density can be supplied) 130kg/m ³ (特殊密度可定制)




Rock wool Panel

岩棉板

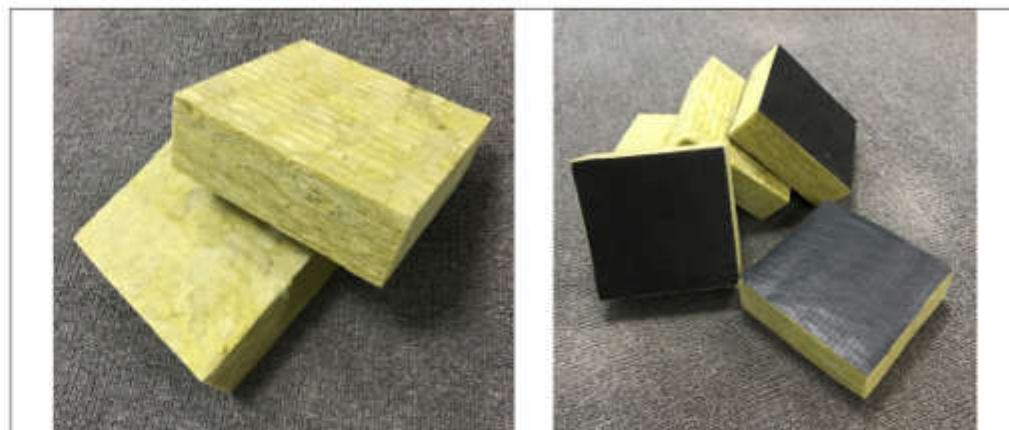



Technical data/产品参数

MAIN MATERIAL/基材	Nonreflexion compounded high density rock wool 不反光高密度岩棉
FACE/表面	Special painted laminated with decorative fiberglass tissue 经特殊工艺处理的装饰纤维毡
DESIGN/颜色	White spray/white paint/black spray/colorful as demanded 白色平喷/白色漆/黑色平喷/彩色, 可根据客户要求制作
FIRE-RESISTANT/防火性	CLASS A tested by SGS (EN13501-1:2007+A1:2009) CLASS A tested by national authoritative departments (GB 8624-2012) A级, 经SGS检测 (EN13501-1:2007+A1:2009) A级, 国家权威部门检测 (GB 8624-2012)
HRC/硬度性	0.8-0.9 tested by SGS/EN50354:2003/EN50354:1997 0.8-1.0 tested by national authoritative departments (GB/T20247-2006/ISO15420:2003) 0.8-0.9经SGS检测/EN50354:2003/EN50354:1997 0.8-1.0 国家权威部门检测 (GB/T20247-2006/ISO15420:2003)
THERMAL-RESISTANT/隔热	≤0.4 m ² ·K/w
HUMIDITY/防潮/下陷性	Dimensionally stable with RH up to 95% at 40°C. No sagging, warping or delaminating 在室内温度40°C以下相对湿度95%以下, 尺寸稳定
MOISTURE RATE/含水率	≤1%
ENVIRONMENTAL IMPACT/环保性	Ties and packings are fully recyclable 成品包装均可回收再利用
SAFETY/安全	Limit of radionuclides in building materials Specific activity of 226Ra ≤ 1.0 Specific activity of 232Th, 40K ≤ 1.3 放射性核素限量 钍-232活度: ≤1.0 钾-40活度: ≤1.3
CERTIFICATE/品质保证	ISO9000:2008, CMAA
NORMAL SIZE/常规尺寸	600x600/600x1200mm, other size to order/尺寸可定制 Width ≤ 1200mm, Length ≤ 2700mm 厚度 ≤ 120mm, 长度 ≤ 2700mm
NORMAL DENSITY/常规密度	130kg/m ³ (special density can be supplied) 130kg/m ³ (特殊密度可定制)



Acoustic black fleece

吸音无纺布

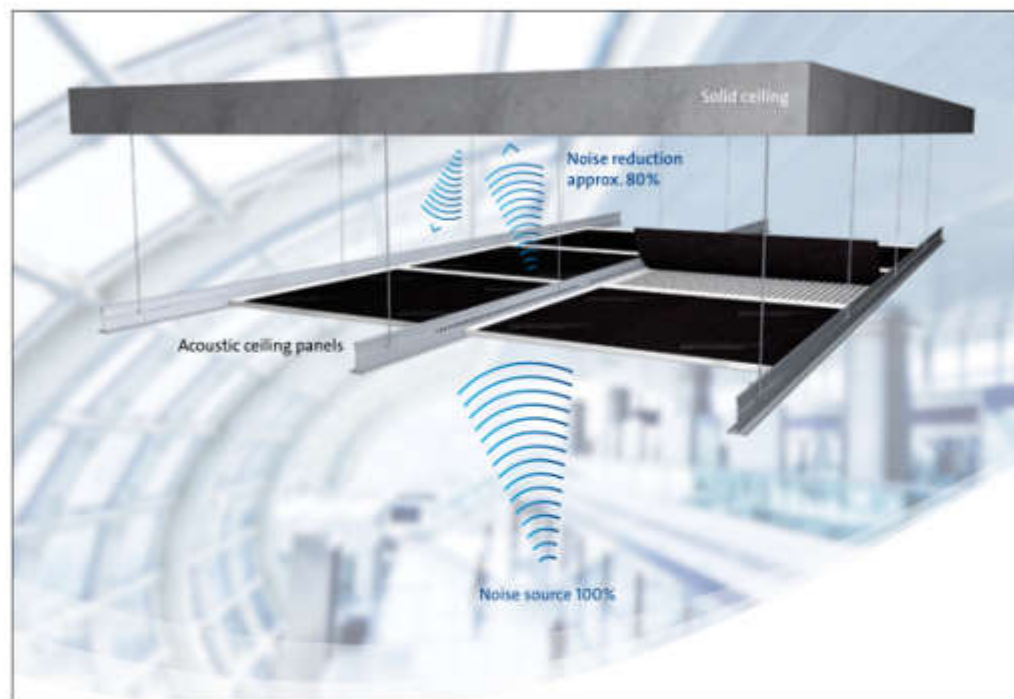

Frequency (Hz)	α _w average	α _w Min/Max
125	0.20	0.14/0.26
160	0.64	0.54/0.74
200	0.75	0.65/0.85
250	0.85	0.75/0.95
315	0.86	0.76/0.96
400	0.85	0.75/0.95
500	0.81	0.71/0.91
630	0.83	0.73/0.93
800	0.81	0.71/0.91
1000	0.77	0.67/0.87
1250	0.74	0.64/0.84
1600	0.70	0.60/0.80
2000	0.70	0.60/0.80
2500	0.69	0.59/0.79
3150	0.67	0.57/0.77
4000	0.63	0.53/0.73

Soundtex acoustic fleece
Soundtex 吸音无纺布
Soundtex 吸音无纺布

Soundtex acoustic fleece

- Weight: 63g/m².
- Thickness: 0.2mm.
- Color: black.
- Reaction to fire: Class A.


Soundtex吸音无纺布:

- 重量: 63g/m²
- 厚度: 0.2mm
- 颜色: 黑色
- 防火等级A级



Total result:
noise reduction coefficient: 0.75

Frequency (Hz)	Acoustic absorption α _w
125	0.20
160	0.75
200	0.75
250	0.85
315	0.86
400	0.85
500	0.81
630	0.83
800	0.81
1000	0.77
1250	0.74
1600	0.70
2000	0.70
2500	0.69
3150	0.67
4000	0.63
5000	0.57




Note: The above data was tested by an external laboratory, measured as average.

Acouloc acoustic fleece

- Weight: 60g/m².
- Thickness: 0.2mm.
- Color: black.
- Reaction to fire: Class B.

Acouloc吸音无纺布:

- 重量: 60g/m²
- 厚度: 0.2mm
- 颜色: 黑色
- 防火等级B级

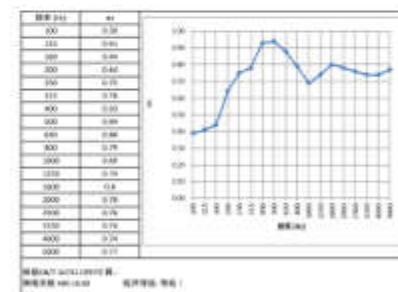

Silence Tech acoustic fleece



- Weight: 60g/m².
- Thickness: 0.2mm.
- Color: black.
- Reaction to fire: Class A2.

Silence Tech吸音无纺布

- 重量: 60g/m²
- 厚度: 0.2mm
- 颜色: 黑色
- 防火等级A2级

New Arrivals

新品推荐





Reflective Mirror Ceiling

反光镜面天花吊顶



Key Features:

- Material: stainless steel, aluminum.
- Panel size: 300x300, 600x600, 600x1200mm.
- Thickness: 0.5-3.0mm Alu, 0.4-0.7mm S/S.
- Clip-in, Lay-in, Hook-on suspension system.

Surface finish:

- Polish
- PVD coating
- Film coating
- Anodized Hairline

Color Range:

- The standard color is silver, gold, black, etc.
- Customized colors available.

Application:

Hotel, Shopping mall, Club, etc.

特征:

- 材料: 不锈钢, 铝
- 尺寸: 300x300, 600x600, 600x1200mm
- 厚度: 0.5-3.0mm 铝, 0.4-0.7mm 不锈钢
- 悬吊系统: 暗架扣板, 明架跌级, 勾搭式。

表面处理:



- 抛光
- 真空镀膜
- 覆膜
- 氧化拉丝

颜色范围:

- 标准颜色为银色, 金色, 黑色
- 可定制颜色

应用场合:

酒店, 商场, 会所, 等等。

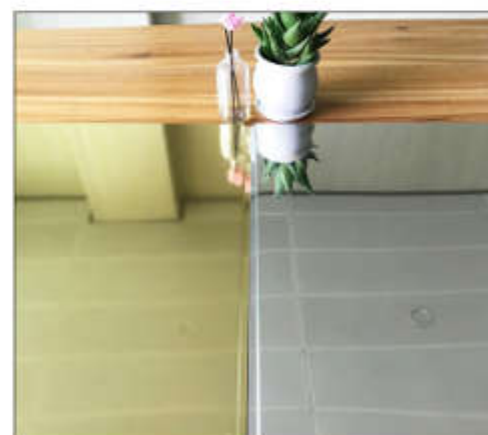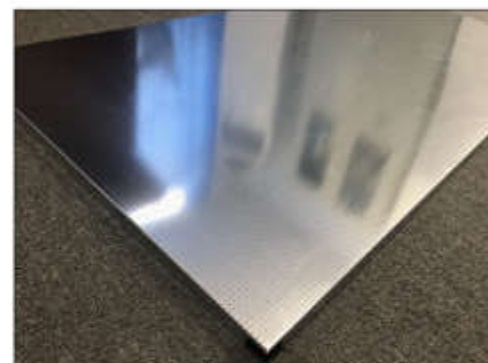



Stainless Steel Ripple Ceiling

不锈钢水波纹天花吊顶



Key Features:

- Material: 201/304/316 stainless steel.
- Panel size: 300x300, 600x600, 600x1200mm.
- Thickness: 0.4-0.7mm S/S.
- Small/Medium/Big ripple patterns for choice.
- Clip-in, Lay-in, Hook-on suspension system.

Surface finish:

- Polish
- PVD coating

Color Range:

- The standard color is silver, gold, black, etc.
- Customized colors available.

Application:

Hotel, Restaurant, Coffee shop, etc.

特征:

- 材料: 201/304/316 不锈钢
- 尺寸: 300x300, 600x600, 600x1200mm
- 厚度: 0.4-0.7mm 不锈钢
- 小/中/大 水波纹可供选择
- 悬吊系统: 暗架扣板, 明架跌级, 勾搭式。

表面处理:

- 抛光
- 真空镀膜


颜色范围:

- 标准颜色为银色, 金色, 黑色
- 可定制颜色

应用场合:

酒店, 餐馆, 咖啡店, 等等。

Big ripple Medium ripple Small ripple

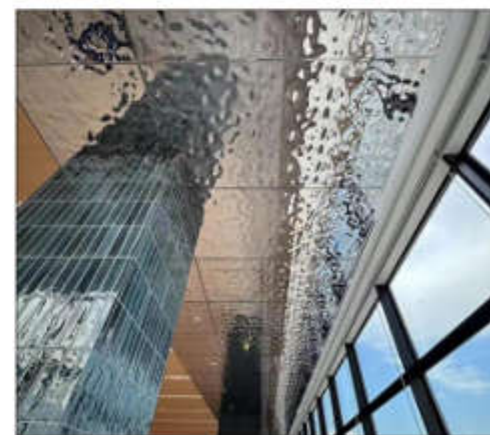



Antique Building Ceiling

仿古建筑天花吊顶

Key Features:

- Material: aluminum.
- Panel size: 600x600, 900x900mm.
- Thickness: 0.6-0.8mm.
- Plain or 3D embossed design.
- More styles, please refer to brochure.

Surface finish:

- Pre-painted
- Film coating

Color Range:

- The standard color refer to the brochure.
- Customized colors available.

Application:

Temple, Restaurant, Resort, etc.

特征:

- 材料: 铝
- 尺寸: 600x600, 900x900mm
- 厚度: 0.6-0.8mm
- 平面或3D浮雕压型设计
- 更多款式, 请参考产品目录

表面处理:

- 滚涂
- 覆膜


颜色范围:

- 标准颜色请参考产品目录
- 可定制颜色

应用场合:

寺庙, 餐馆, 度假村, 等等.



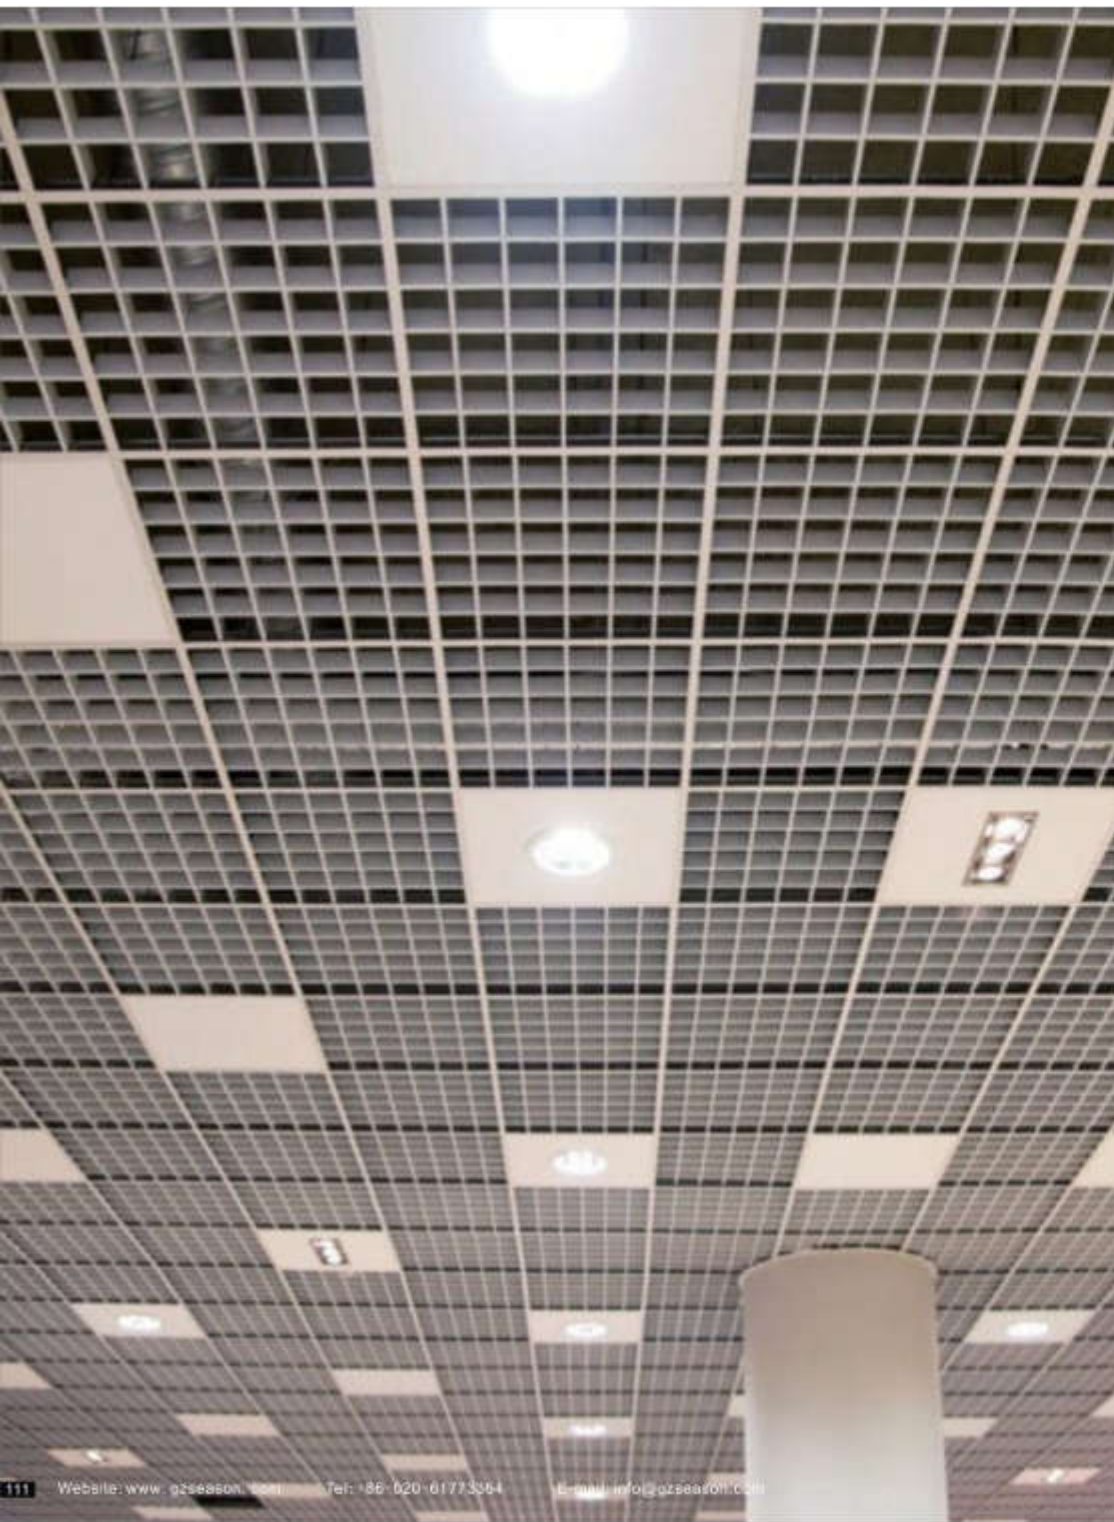

T-grid Open Cell Ceiling

T骨格栅天花吊顶

Key Features:

- Material: aluminum
- Standard size: 300x600, 300x1200, 600x600, 600x1200mm, customized.
- Module size: 295x595, 295x1195, 595x595, 595x1195mm, customized.
- Cell size: 100x100, 150x150, 200x200, 250x250, 300x300mm, customized.
- Matched 15mm or 24mm T-grid suspension system

Surface finish:

- Powder coating
- PE coating
- PVDF coating
- Pre-painted
- Heat-transferring

Color Range:

- The standard color is white, black, grey, etc.
- Wood color and marble color is available.
- Any of the RAL color is available as required.
- Customized colors available.

Application:

Supermarket, School, Metro station, etc.

特征:

- 材料: 铝
- 标准尺寸: 300x600, 300x1200, 600x600, 600x1200mm, 可定做
- 模块尺寸: 295x595, 295x1195, 595x595, 595x1195mm, 可定做
- 格子尺寸: 100x100, 150x150, 200x200, 250x250, 300x300mm, 可定做
- 搭配15mm或24mm T型龙骨明架悬吊系统使用

表面处理:


- 粉末喷涂:
- 聚酯油漆喷涂:
- 氟碳喷涂:
- 滚涂
- 热转印

颜色范围:


- 标准颜色为白色, 黑色, 灰色
- 可做木纹或大理石纹颜色
- 可按要求做任何RAL颜色
- 可定制颜色

应用场合:

超市, 学校, 地铁站, 等等。

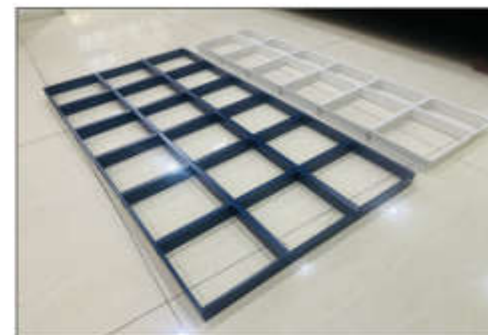

安装图:



- 1、拉爆螺丝
- 2、螺母
- 3、螺杆
- 4、主龙骨吊件
- 5、副龙骨
- 6、主龙骨
- 7、T骨格栅天花吊顶



Wavy Baffle Ceiling

波浪方通天花吊顶



Key Features:

- Material: aluminum
- Baffle Width: 30-300mm
- Baffle Height: 100-500mm
- Baffle Length: 1000-2400mm
- Baffle Thickness: 2.0-3.0mm

Surface finish:

- Powder coating
- PE coating
- PVDF coating
- Heat-transferring

Color Range:

- The standard color is white, black, grey, etc.
- Wood color and marble color is available.
- Any of the RAL color is available as required.
- Customized colors available.

Application:

Convention Center, Shopping mall, Hotel, etc.

特征:

- 材料: 铝
- 方通宽度: 30-300mm
- 方通高度: 100-500mm
- 方通长度: 1000-2400mm
- 方通厚度: 2.0-3.0mm

表面处理:

- 粉末喷涂:
- 聚酯油漆喷涂:
- 氟碳喷涂:
- 热转印

颜色范围:

- 标准颜色为白色, 黑色, 灰色
- 可做木纹或大理石纹颜色
- 可按要求做任何RAL颜色
- 可定制颜色


应用场合:

会展中心, 商场, 酒店, 等等。



Installation:

安装图:

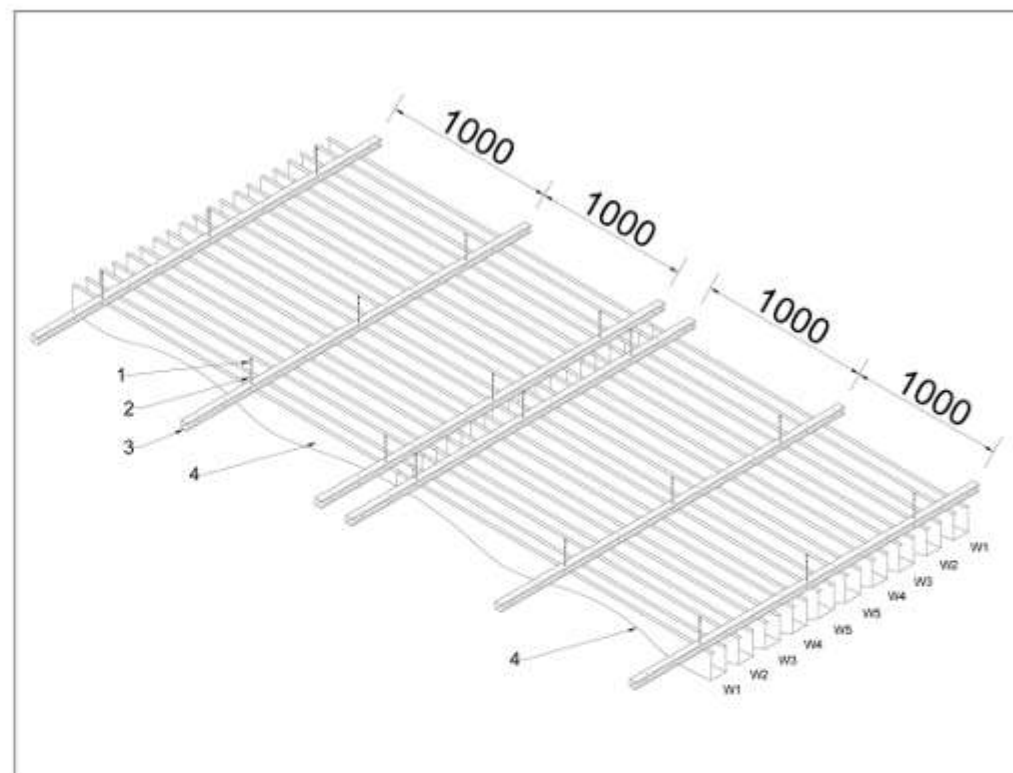


Wavy Baffle Ceiling System

波浪方通天花吊顶系统:

1. Anchor bolt
2. Thread rod & Nuts
3. C-channel
4. Wavy baffle ceiling
5. Bolt & Nuts

1. 拉爆螺丝
2. 螺杆和螺母
3. C型龙骨
4. 波浪方通
5. 螺栓和螺母

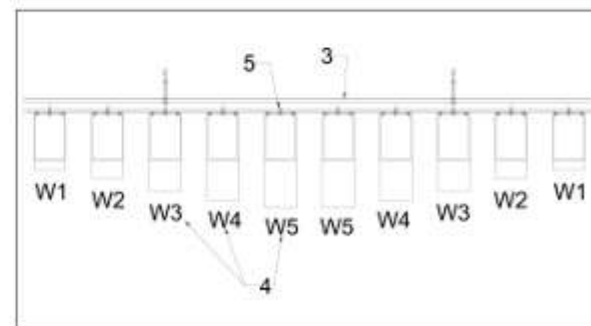

Section Details:

节点图

Ultramicro Perforated Acoustic Panel

超微孔吸音板

Key Features:

- Material: aluminum
- Size: 600x600, 600x1200, 1200x2400mm, customized
- Thickness: 0.8-1.0mm
- Perforation: 0.4x0.04mm, open area 1%

Surface finish:

- Powder coating
- PE coating
- PVDF coating
- Pre-painted

Color Range:

- The standard color is white, black, grey, etc.
- Wood color and marble color is available.
- Any of the RAL color is available as required.
- Customized colors available.

Application:

Office building, Meeting room, Library, etc.

特征:

- 材料: 铝
- 尺寸: 600x600, 600x1200, 1200x2400mm, 可定制
- 厚度: 0.8-1.0mm
- 冲0.4x0.04mm孔, 冲孔率1%

表面处理:


- 粉末喷涂:
- 聚酯油漆喷涂:
- 氟碳喷涂:
- 滚涂

颜色范围:

- 标准颜色为白色, 黑色, 灰色
- 可做木纹或大理石纹颜色
- 可按要求做任何RAL颜色
- 可定制颜色

应用场合:

写字楼, 会议室, 图书馆, 等等。

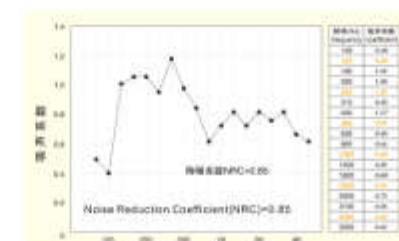



Decorative Metal Mesh

金属装饰网



Key Features:

- Material: stainless steel, aluminum, copper,
- Panel Width: standard 1200mm, customized
- Panel Length: standard 2900mm, customized,
- Style: square, rectangular, circular, rhombic, etc.

Surface finish:

- Powder coating
- PE coating
- PVDF coating
- Plating
- Anodized

Color Range:

- The standard color is silver, gold, bronze, etc.
- Metallic colors are available.
- Any of the RAL color is available as required.
- Customized colors available.

Application:

Office building, Hotel, Club, etc.

特征:

- 材料: 不锈钢, 铝, 铜
- 板宽度: 标准1200mm, 可定做
- 板长度: 标准2900mm, 可定做
- 款式: 正方形、长方形、环形、菱形, 等等。

表面处理:


- 粉末喷涂
- 聚酯油漆喷涂
- 氟碳喷涂
- 电镀
- 氧化

颜色范围:

- 标准颜色为银色、金色、古铜色, 等等
- 可做各金属颜色
- 可按要求做任何RAL颜色
- 可定制颜色

应用场合:

写字楼, 酒店, 会所, 等等。

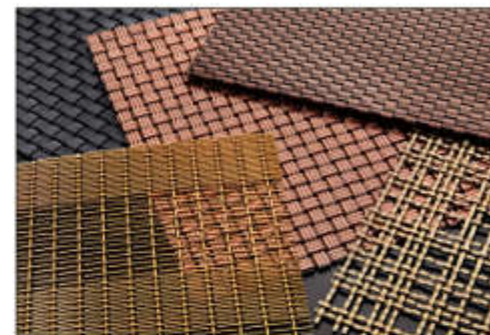


Styles:

款式:



Customized design is available.

可以按设计定制。

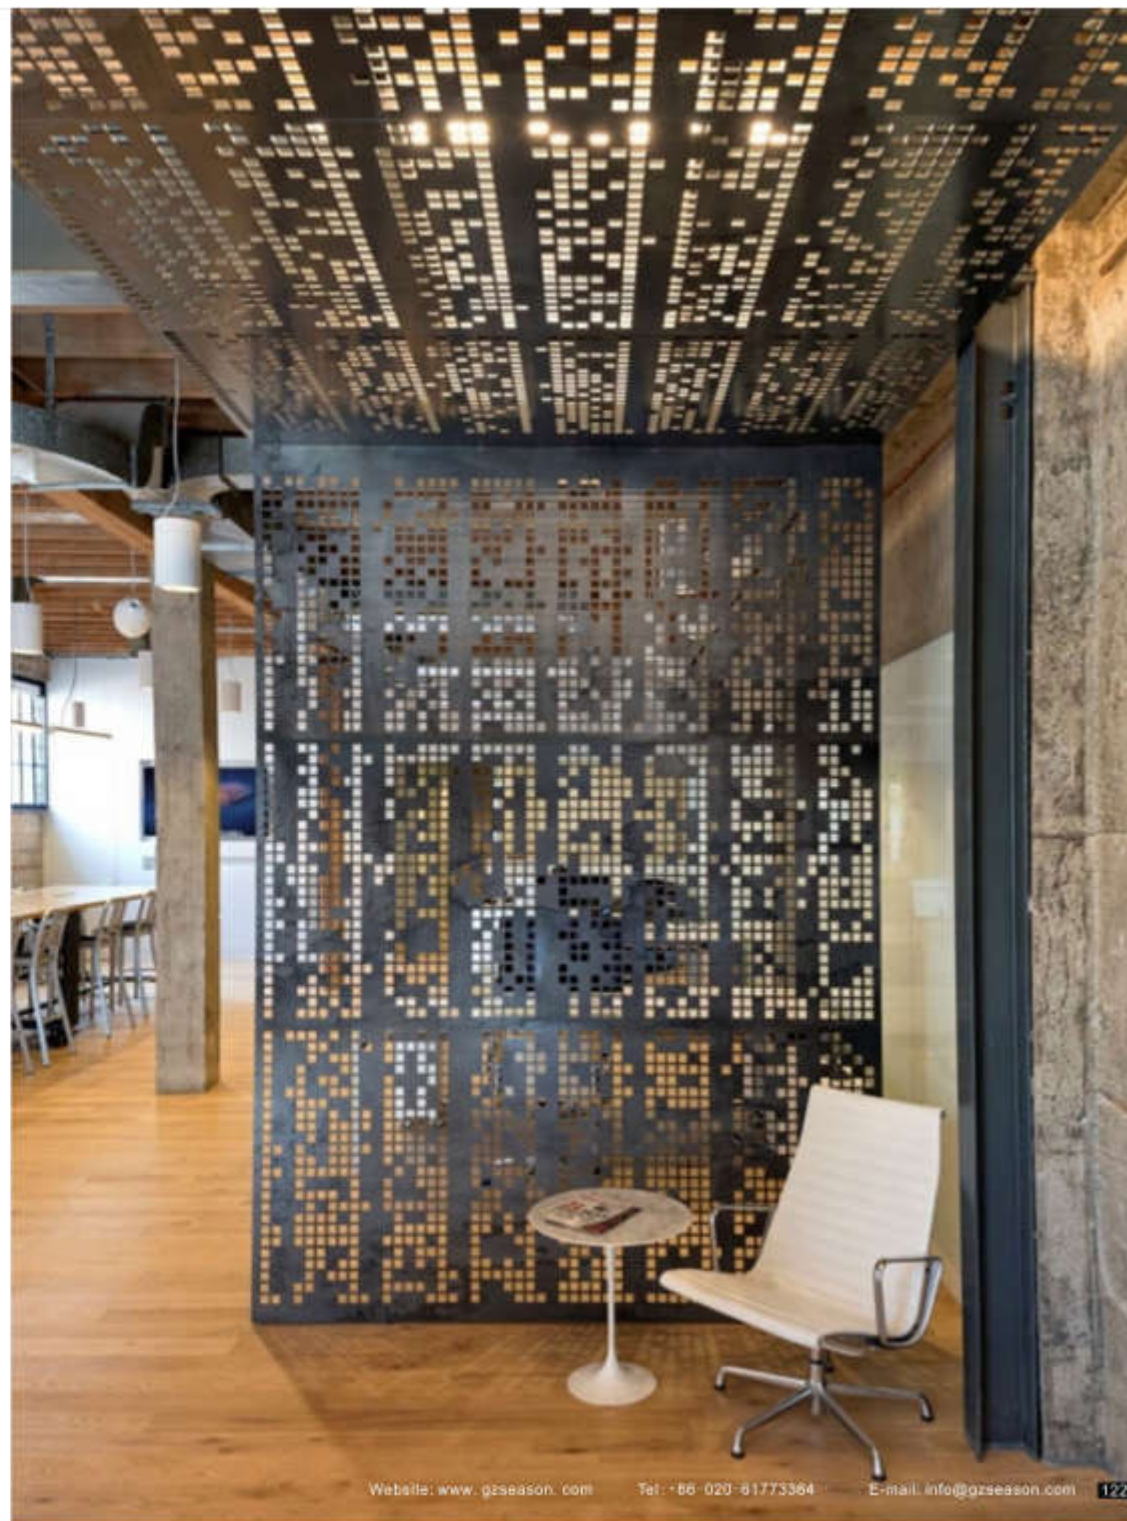

Laser Cut Hollowed Panel

激光雕刻镂空板



Key Features:

- Material: aluminum, galvanized steel, stainless steel.
- Panel Width: Max 1400mm, customized.
- Panel Length: Max 5000mm, customized.
- Panel Thickness: 1.5-4.0mm, customized.

Surface finish:

- Powder coating
- PE coating
- PVDF coating
- Heat-transferring

Color Range:

- The standard color is white, black, grey, etc.
- Wood color and marble color is available.
- Any of the RAL color is available as required.
- Customized colors available.

Application:

Hotel, Museum, Mosque, etc.

特征:

- 材料: 铝, 镀锌钢, 不锈钢
- 板宽度: 最宽1400mm, 可定制
- 板长度: 最长5000mm, 可定制
- 板厚度: 1.5-4.0mm, 可定制

表面处理:


- 粉末喷涂:
- 聚酯油漆喷涂:
- 氟碳喷涂:
- 热转印

颜色范围:

- 标准颜色为白色, 黑色, 灰色
- 可做木纹或大理石纹颜色
- 可按要求做任何RAL颜色
- 可定制颜色

应用场合:

酒店, 博物馆, 清真寺, 等等。

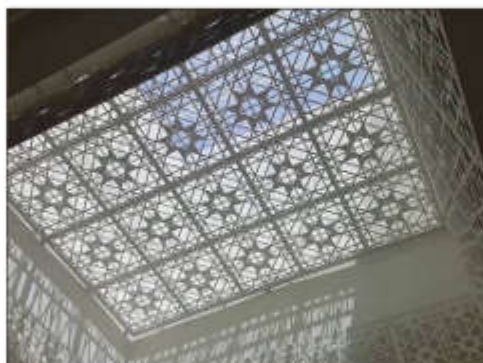

UV Printing Metal Panel

UV 喷绘打印金属板



Key Features:

- Material: aluminum, galvanized steel, stainless steel.
- Max Printing size: 1300x2500mm, customized.
- Flat and curve panels are available.

Surface finish:

- UV printing

Color Range:

- The standard color is white.
- Wood color and marble color is available.
- Any of the RAL color is available as required.
- Customized colors available.



Application:

Metro station, Airport, Convention Center, etc.



特征:

- 材料: 铝, 镀锌钢, 不锈钢
- 最大打印尺寸: 1300x2500mm, 可定做
- 平面和弧形板面都可使用

表面处理:

- UV 喷绘打印

颜色范围:

- 标准颜色为白色
- 可做木纹或大理石纹颜色
- 可按要求做任何RAL颜色
- 可定制颜色

应用场合:

地铁站, 机场, 会展中心, 等等。



Aluminum Bamboo

铝竹



Key Features:

- Material: aluminum.
- Size: dia 30/40/50/60/80mm.
- Thickness: 0.9-1.1mm.
- Length: 2900mm as standard, up to 6000mm.

Surface finish:

- Powder coating
- PE coating
- PVDF coating
- Heat-transferring

Color Range:

- Wood color and marble color is available.
- Any of the RAL color is available as required.
- Customized colors available.

Application:

Park, Museum, Restaurant, etc.

特征:

- 材料: 铝
- 尺寸: 直径30/40/50/60/80mm
- 厚度: 0.9-1.1mm
- 长度: 标准2.9米, 可做到6米

表面处理:


- 粉末喷涂:
- 聚酯油漆喷涂:
- 氟碳喷涂:
- 热转印

颜色范围:

- 可做木纹或大理石纹颜色
- 可按客户要求任何RAL颜色
- 可定制颜色

应用场合:

公园, 博物馆, 餐馆, 等等.

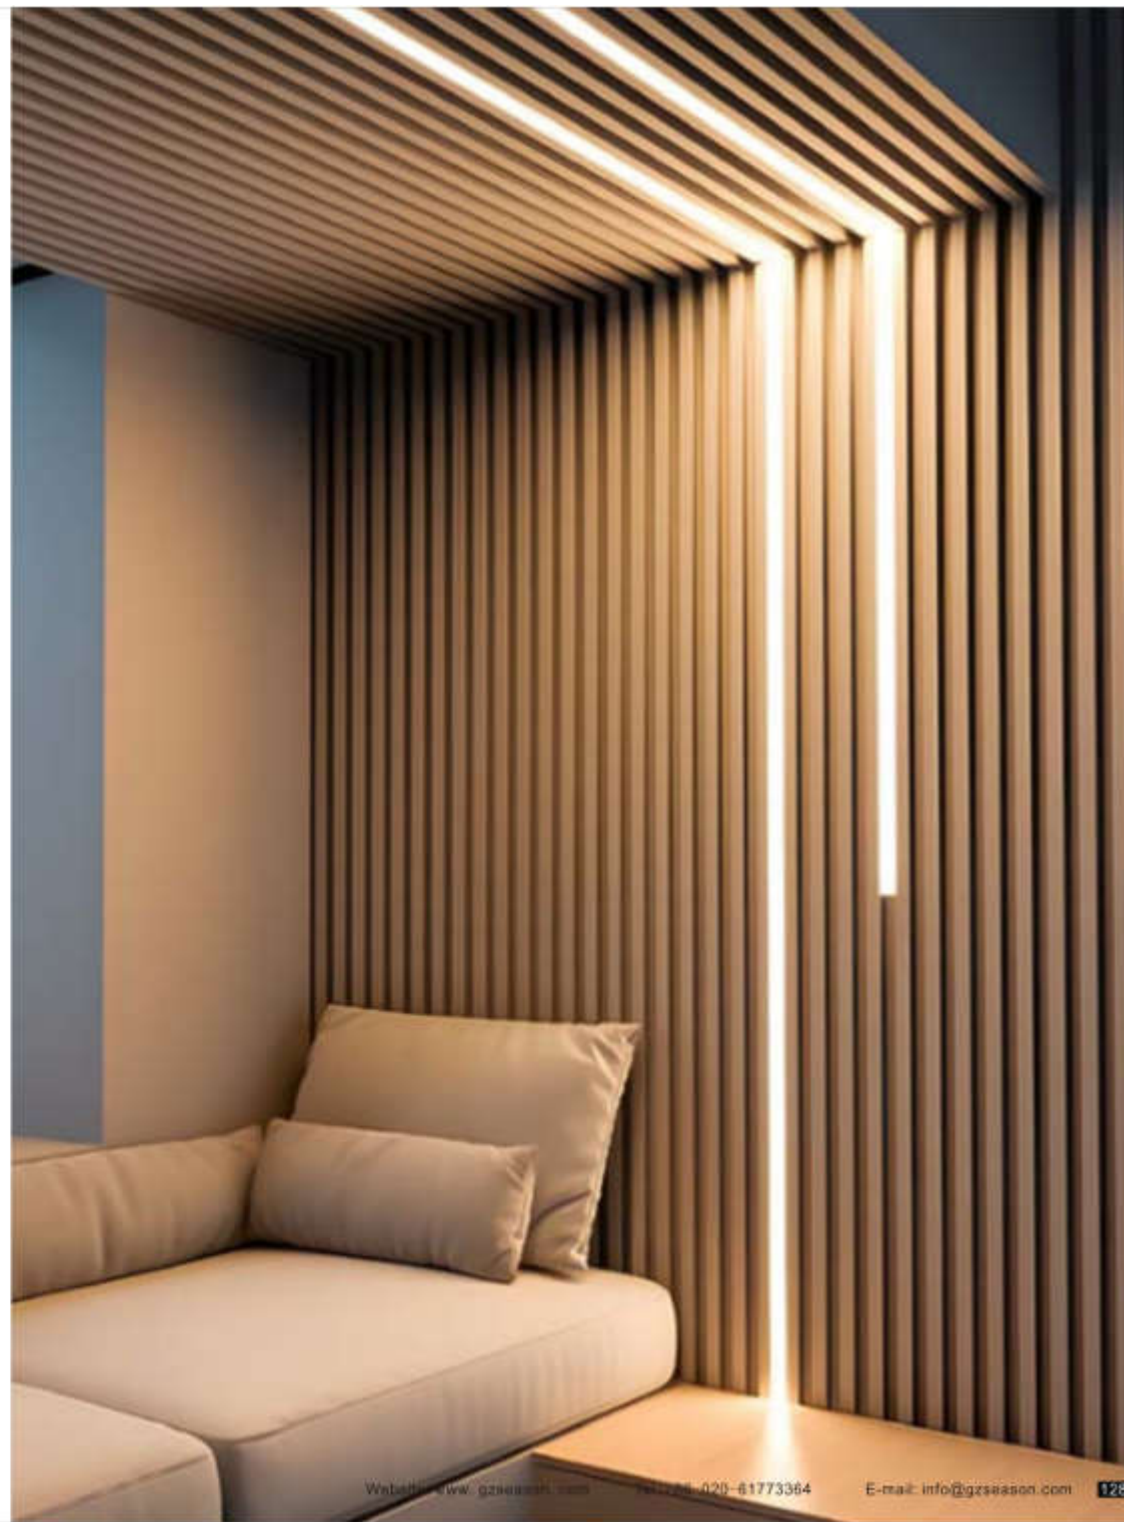

Slot Panel & Spandrel Panel

长城板/拱肩板



Key Features:

- Material: aluminum.
- Panel Size: various, refer to the brochure.
- Panel Length: standard 2900mm, up to 6000mm.
- Thickness: 0.5-3.0mm.

Surface finish:

- Powder coating
- PE coating
- PVDF coating
- Pre-painted
- Heat-transferring
- Anodized

Color Range:

- The standard color is white, black, grey, etc.
- Wood color and marble color is available.
- Any of the RAL color is available as required.
- Customized colors available.

Application:

Office building, Hotel, Shopping Mall, etc.

特征:

- 材料: 铝
- 尺寸: 多种尺寸, 可参考产品目录
- 长度: 标准2900mm, 可做到6000mm
- 厚度: 0.5-3.0mm

表面处理:



- 粉末喷涂:
- 聚酯油漆喷涂:
- 氟碳喷涂:
- 滚涂
- 热转印
- 氧化

颜色范围:

- 标准颜色为白色, 黑色, 灰色
- 可做木纹或大理石纹颜色
- 可按要求做任何RAL颜色
- 可定制颜色

应用场合:

写字楼, 酒店, 商场, 等等。

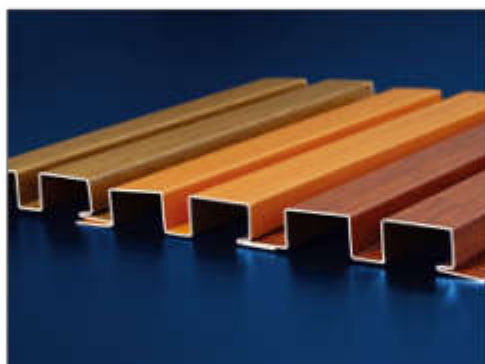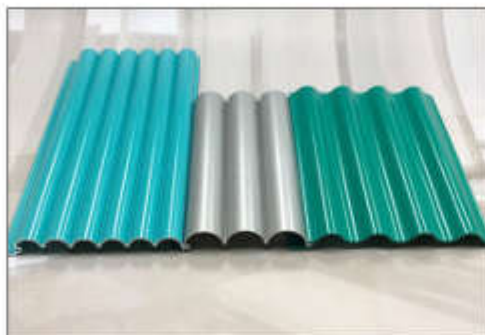

Product Series:

产品系列:



More details,
please refer to
the product
brochure,
customized
design is
available.

更多详情, 请参
考产品目录, 可
按设计定制。





Corrugated Panel

瓦楞板（彩瓦）

Key Features:

- Material: PPGI, PPAL
- Panel size: various, refer to the brochure
- Panel Length: standard 2900mm, up to 6000mm,
- Thickness: 0.4-1.0mm.

Surface finish:

- Pre-painted

Color Range:

- The standard color is white, grey, blue, etc.
- Wood color and marble color is available.
- Any of the RAL color is available as required.
- Customized colors available.

Application:

4S stores, Logistics transfer center, Factory building, etc.

特征:

- 材料: 彩钢, 彩铝
- 尺寸: 多种尺寸, 可参考产品目录
- 长度: 标准2900mm, 可做到6000mm
- 厚度: 0.4-1.0mm

表面处理:

- 滚涂

颜色范围:

- 标准颜色为白色, 灰色, 蓝色
- 可做木纹或大理石纹颜色
- 可按要求做任何RAL颜色
- 可定制颜色

应用场合:

4S店, 物流中转中心, 厂房建筑, 等等。



Product Series 产品系列:



More details, please refer to the product brochure, customized design is available.

更多详情, 请参考产品目录, 可按设计定制。



Acoustic Sandwich Panel

隔音夹芯板



Key Features:

- Material: standard PPGI, customized PPAL, Stainless steel.
- Panel Width: standard 1150mm, customized available;
- Panel Length: standard 2900mm, customized ≤ 3000 mm;
- Panel Thickness: standard 50/75/100mm, customized 125/150/175/200mm;
- Skin sheet thickness: 0.5-0.6mm PPGI/Stainless steel, customized PPAL.

Surface finish:

- Pre-painted
- Polish
- PVD coating

Color Range:

- The standard color is white color.
- Wood color and marble color is available.
- Any of the RAL color is available as required.
- Customized colors available.

Application:

Hospital operating room, Lab, Clean room, etc.

特征:

- 材料: 彩钢 (常规), 可定做彩铝, 不锈钢
- 板宽度: 标准1150mm, 可定做;
- 板长度: 标准2900mm, 可定做 ≤ 3000 mm;
- 板厚度: 标准50/75/100mm, 可定做125/150/175/200mm
- 面板厚度: 0.5-0.6mm 彩钢或不锈钢, 彩铝厚度可定制。

表面处理:

- 滚涂
- 抛光
- 真空镀膜

颜色范围:

- 标准颜色为白色
- 可做木纹或大理石纹颜色
- 可按要求做任何RAL颜色
- 可定制颜色

应用场合:

医院手术室, 实验室, 洁净室, 等等。



Product Series:

产品系列:

岩棉夹芯板
Rock wool sandwich panel



玻璃镁夹芯板
Glass magnesium sandwich panel



酚醛板
Phenolic sandwich panel



聚氨酯夹芯板
Polyurethane sandwich panel



真金不老泡夹芯板
True Gold Fountainhead sandwich panel



硅岩夹芯板
Silica sandwich panel



结构示图 Structure

